


AC Controller Modules

$I_{RMS} = 86 A$
 $V_{RRM} = 1200-1600 V$

V_{RSM}	V_{RRM}	Type	V_{DSM}	V_{DRM}
V	V		V	V
1200	1200	MLO 75-12io1	MMO 75-12io1	
1600	1600	MLO 75-16io1	MMO 75-16io1	

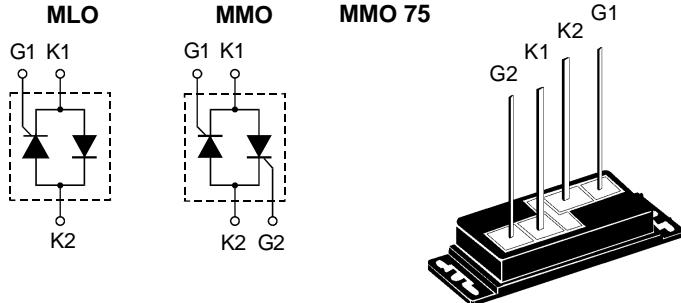

Symbol	Test Conditions	Maximum Ratings		
I_{RMS}	$T_K = 85^\circ C$, 50 - 400 Hz (for single controller)	86	A	
I_{TRMS}	$T_{VJ} = T_{VJM}$	62	A	
I_{TAVM}	$T_K = 85^\circ C$; (180° sine)	39	A	
I_{TSM}	$T_{VJ} = 45^\circ C$; $V_R = 0$	1150	A	
	$t = 10 \text{ ms (50 Hz), sine}$ $t = 8.3 \text{ ms (60 Hz), sine}$	1230	A	
	$T_{VJ} = T_{VJM}$ $V_R = 0$	1000	A	
	$t = 10 \text{ ms (50 Hz), sine}$ $t = 8.3 \text{ ms (60 Hz), sine}$	1100	A	
I^2t	$T_{VJ} = 45^\circ C$; $V_R = 0$	6600	A^2s	
	$t = 10 \text{ ms (50 Hz), sine}$ $t = 8.3 \text{ ms (60 Hz), sine}$	6280	A^2s	
	$T_{VJ} = T_{VJM}$ $V_R = 0$	5000	A^2s	
	$t = 10 \text{ ms (50 Hz), sine}$ $t = 8.3 \text{ ms (60 Hz), sine}$	5020	A^2s	
$(di/dt)_{cr}$	$T_{VJ} = T_{VJM}$ $f = 50 \text{ Hz}, t_p = 200 \mu s$ $V_D = 2/3 V_{DRM}$ $I_G = 0.45 \text{ A}$ $di_G/dt = 0.45 \text{ A}/\mu s$	repetitive, $I_T = 150 \text{ A}$ non repetitive, $I_T = I_{TAVM}$	100	$\text{A}/\mu s$
$(dv/dt)_{cr}$	$T_{VJ} = T_{VJM};$ $R_{GK} = \infty$; method 1 (linear voltage rise)	$V_{DRM} = 2/3 V_{DRM}$	1000	$\text{V}/\mu s$
P_{GM}	$T_{VJ} = T_{VJM}$ $I_T = I_{TAVM}$	$t_p = 30 \mu s$ $t_p = 300 \mu s$	10 5	W
P_{GAVM}			0.5	W
V_{RGM}			10	V
T_{VJ}			-40...+125	$^\circ C$
T_{VJM}			125	$^\circ C$
T_{stg}			-40...+125	$^\circ C$
V_{ISOL}	50/60 Hz, RMS $I_{ISOL} \leq 1 \text{ mA}$	$t = 1 \text{ min}$ $t = 1 \text{ s}$	3000 3600	$\text{V} \sim$
M_d	Mounting torque	(M3) (UNF 4-32)	0.7 ± 0.1 6 ± 0.9	Nm lb.in.
Weight	typ.		15	g

K1 = Cathode 1, G1 = Gate 1
K2 = Cathode 2, G2 = Gate 2
(MLO 36 has no G2 lead)

Features

- Thyristor controller for AC (circuit W1C acc. to IEC) for mains frequency
- Direct copper bonded Al_2O_3 -ceramic base plate
- Isolation voltage 3600 V \sim
- Planar passivated chips
- UL registered, E 72873
- Long wire leads suitable for PC board soldering

Applications

- Switching and control of single and three phase AC
- Softstart AC motor controller
- Solid state switches
- Light and temperature control


Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling
- High power density

Data according to IEC 60747 and to a single thyristor/diode unless otherwise stated.
IXYS reserves the right to change limits, test conditions and dimensions.

Symbol	Test Conditions	Characteristic Values		
I_R, I_D	$T_{VJ} = T_{VJM}; V_R = V_{RRM}; V_D = V_{DRM}$	≤	5	mA
V_T	$I_T = 100 \text{ A}; T_{VJ} = 25^\circ\text{C}$	≤	1.4	V
V_{TO}	For power-loss calculations only	0.85	V	
r_T		5.0	$\text{m}\Omega$	
V_{GT}	$V_D = 6 \text{ V}; T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = -40^\circ\text{C}$	≤	1.5	V
I_{GT}	$V_D = 6 \text{ V}; T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = -40^\circ\text{C}$	≤	150	mA
		≤	200	mA
I_{GM}	$t_p = 50 \mu\text{s}, f = 60 \text{ Hz}, I_T = I_{TAVM}$	6	A	
V_{GD}	$T_{VJ} = T_{VJM}; V_D = 2/3 V_{DRM}$	≤	0.25	V
I_{GD}		≤	5	mA
I_L	$T_{VJ} = 25^\circ\text{C}; t_p = 10 \mu\text{s}, V_D = 6 \text{ V}$ $I_G = 0.45 \text{ A}; di_G/dt = 0.45 \text{ A}/\mu\text{s}$	≤	300	mA
I_H	$T_{VJ} = 25^\circ\text{C}; V_D = 6 \text{ V}; R_{GK} = \infty$	≤	100	mA
t_{gd}	$T_{VJ} = 25^\circ\text{C}; V_D = 1/2 V_{DRM}$ $I_G = 0.45 \text{ A}; di_G/dt = 0.45 \text{ A}/\mu\text{s}$	≤	2	μs
t_q	$T_{VJ} = T_{VJM}; I_T = 50 \text{ A}, t_p = 200 \mu\text{s}; -di/dt = 10 \text{ A}/\mu\text{s}$ $V_R = 100 \text{ V}; dv/dt = 15 \text{ V}/\mu\text{s}; V_D = 2/3 V_{DRM}$	typ.	150	μs
R_{thJC}	per thyristor/diode; DC current	0.55	K/W	
	per module	0.275	K/W	
R_{thJK}	per thyristor/diode; DC current	0.75	K/W	
	per module	0.375	K/W	
d_s	Creeping distance on surface	4.5	mm	
d_a	Creepage distance in air	4.5	mm	
a	Max. allowable acceleration	50	m/s^2	

Dimensions in mm (1 mm = 0.0394")
MLO 75

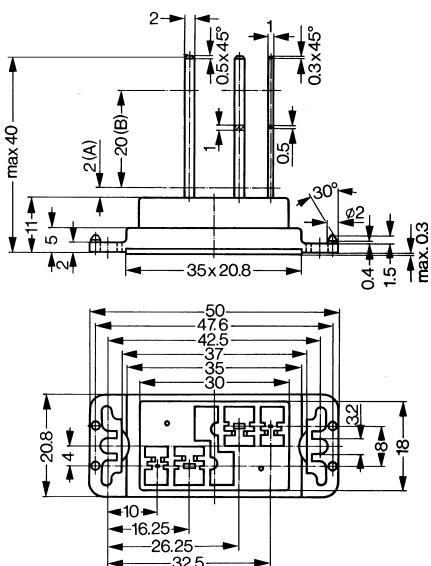

MMO 75

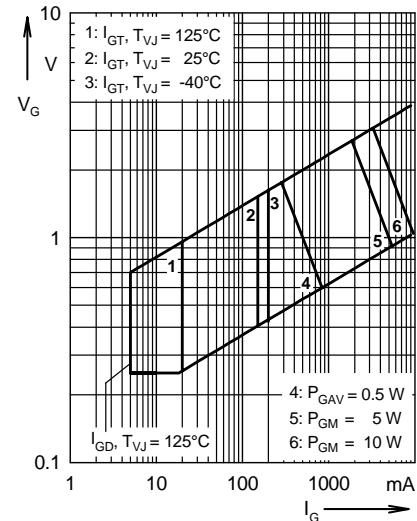
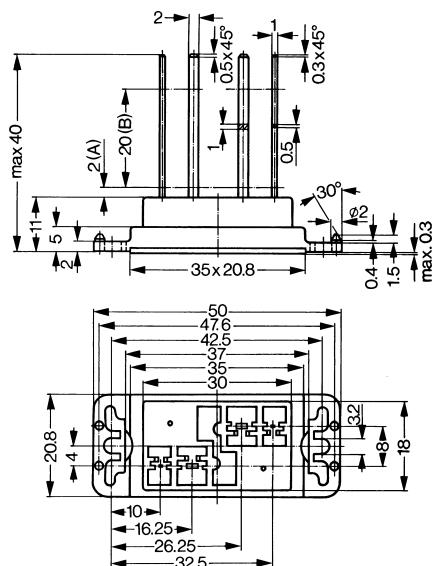


Fig. 1 Gate trigger characteristics

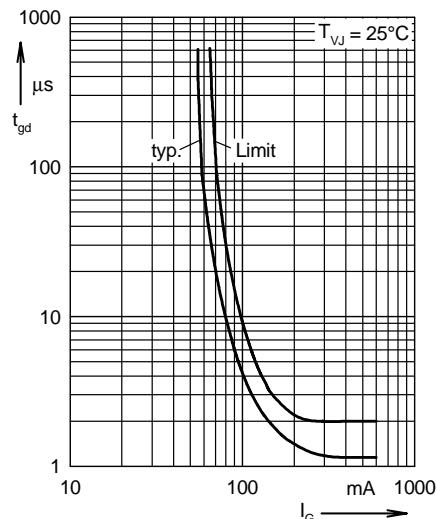


Fig. 2 Gate trigger delay time

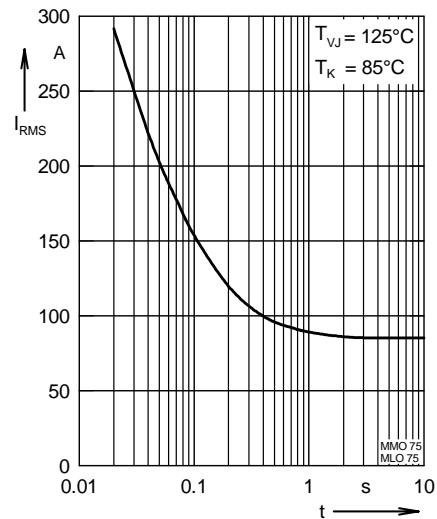


Fig. 3 Rated RMS current versus time (360° conduction)

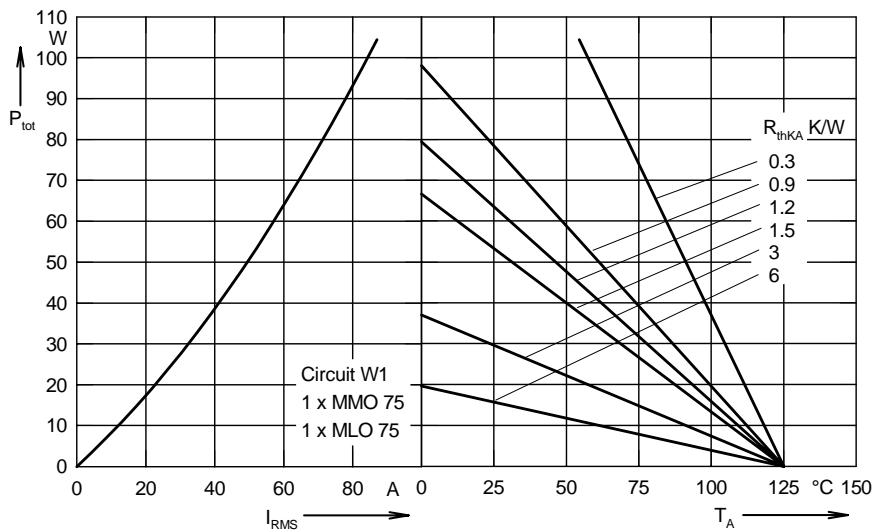


Fig. 4 Load current capability for single phase AC controller

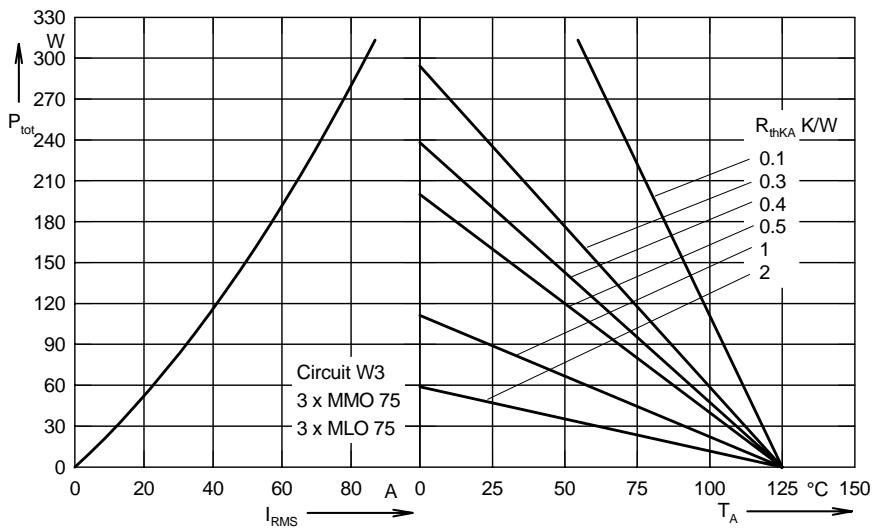


Fig. 6 Load current capability for three phase AC controller: 3xMMO 75/MLO 75

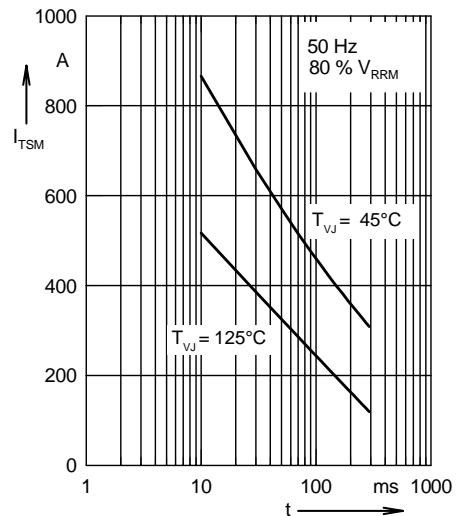


Fig. 5 Surge overload current
 I_{TSM} , I_{FSM} : Crest value, t : duration

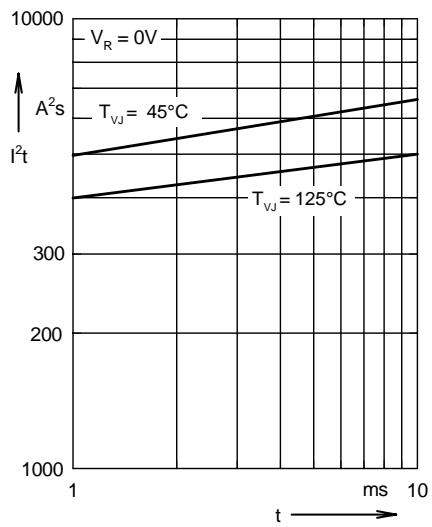


Fig. 7 I^2t versus time (1-10 ms)

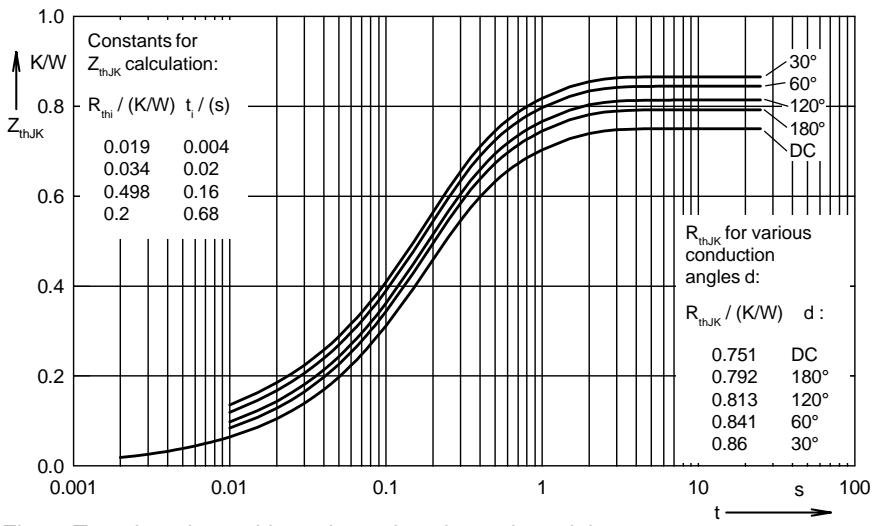


Fig. 8 Transient thermal impedance junction to heatsink (per thyristor or diode)

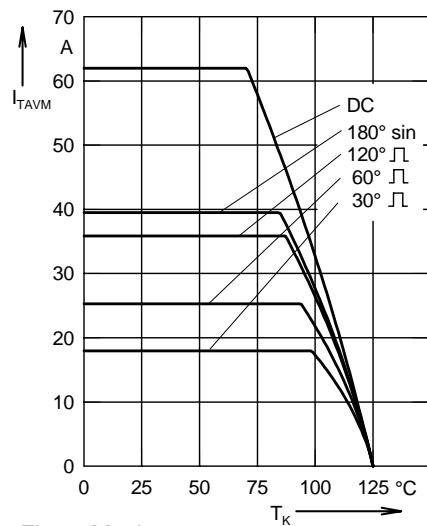


Fig. 9 Maximum on-state current versus heatsink temperature