

**MOLDED-CASE CIRCUIT BREAKERS
EARTH-LEAKAGE CIRCUIT BREAKERS**
Instruction for Handle-Locking Device (HL)

Before using these accessories,
please read this manual.

| Type | Applicable type | |
|--------|---|--|
| | MCCB | ELCB |
| HL-4CW | NF400-CW,NF400-ZCW | NV400-CW |
| HL-4SW | NF400-SW/SEW/HEW/REW/UEW NF400-ZSW/ZEW NF630-CW/SW/SEW/HEW/REW NF630-ZCW/ZSW/ZEW NF800-CEW/SDW/SEW/HEW/REW/UEW NF800-ZEW | NV400-SW/SEW/HEW/REW NV630-CW/SW/SEW/HEW NV800-SEW/HEW |

Remark: (1) There is no other application except above table.

(2) It is possible to be locked in ON or OFF position.

(3) It is possible to mount Handle-locking device regardless of poles.

(4) A padlock is not supplied. Please get it on the market.

(5) The HL without padlock can be used as a lock cover (LC). ▪


(6) It is conformed to isolation.

● Handle-locking devices are available to prevent accidental or deliberate operation of circuit breakers. The "trip free" handle of breaker enables it to trip on over load or short circuit conditions, ▪ even though, handle locking devices are in place.

However, handle-locking devices must be removed before the breaker can be reset.

● When remove it, draw it strongly, as lock cover is set tightly.

● Don't push the trip button when the handle is locked in the OFF position.

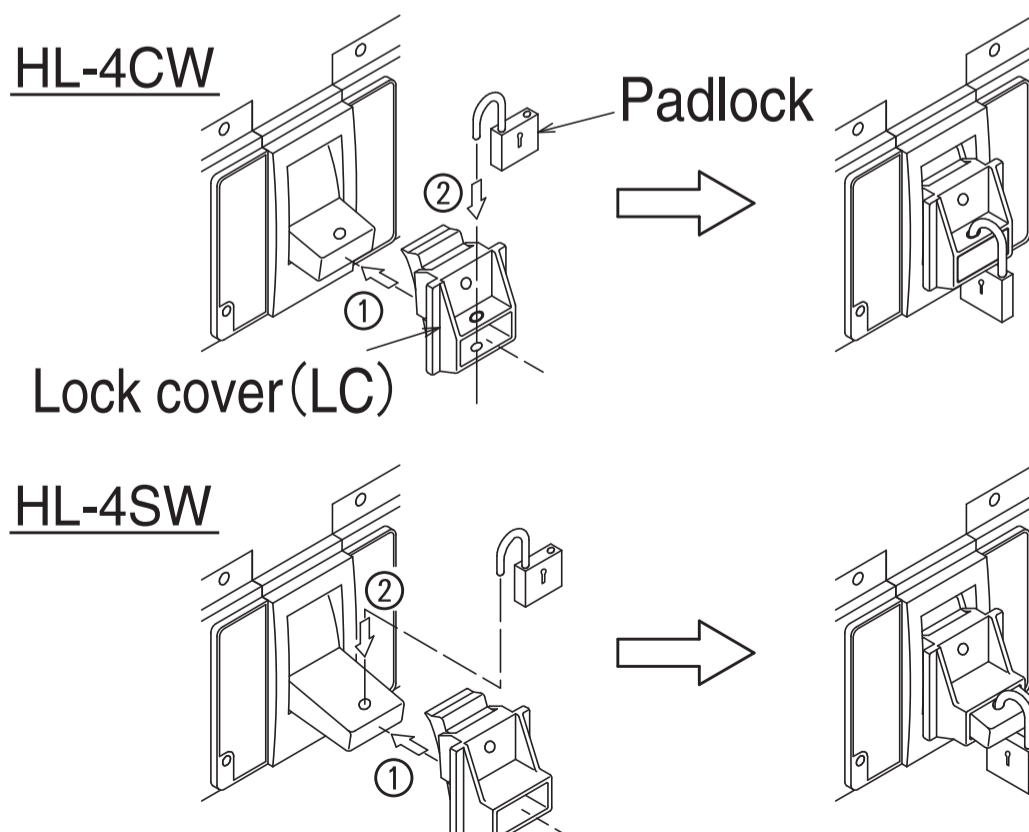

Padlock dimensions (in mm)

