



- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- High efficiency up to 94%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- · Cooling by free air convection
- · OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- · Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 5 years warranty (Note.10)

















HLG-185H-12 A Blank: IP67 rated. Cable for I/O connection.

A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.

B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or potentiometer.

D (option, safety pending): IP67 rated. Timer dimming function, contact MEAN WELL for details.


#### **SPECIFICATION**

PECIFIC	, , , , , , , , , , , , , , , , , , , ,		1		1	1	T		1	1	1			
MODEL			HLG-185H-12	HLG-185H-15	HLG-185H-20	HLG-185H-24	HLG-185H-30	HLG-185H-36	HLG-185H-42	HLG-185H-48	HLG-185H-54			
	DC VOLTAGE		12V	15V	20V	24V	30V	36V	42V	48V	54V			
ОИТРИТ	CONSTANT CURRENT REGION Note.4		6 ~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V			
	RATED CURRENT		13A	11.5A	9.3A	7.8A	6.2A	5.2A	4.4A	3.9A	3.45A			
	RATED POWER		156W	172.5W	186W	187.2W	186W	187.2W	184.8W	187.2W	186.3W			
	RIPPLE & NOISE (max.) Note.2		150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p			
	VOLTAGE ADJ. RANGE Note.6			13.5 ~ 17V	17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V			
	CURRENT ADJ. RANGE VOLTAGE TOLERANCE Note.3				ootentiometer A		12. 001	100 101	100 .01	10 001	1.0 001			
			6.5 ~ 13A	5.75 ~ 11.5A	4.65 ~ 9.3A	3.9 ~ 7.8A	3.1 ~ 6.2A	2.6 ~ 5.2A	2.2 ~ 4.4A	1.95 ~ 3.9A	1.72 ~ 3.45			
				±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%			
	LINE REGULATIO		±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	LOAD REGULATION		±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	SETUP, RISE TIM										10.5%			
	· · · · · · · · · · · · · · · · · · ·		2500ms, 80ms at full load 230VAC / 115VAC ; B type 2500ms, 200ms at 95% load 230VAC / 115VAC											
	HOLD UP TIME (T													
	VOLTAGE RANGE		90 ~ 305VAC	127 ~ 43	IVDC									
	FREQUENCY RANGE		47 ~ 63Hz	DE 0.05	2001/40 DE 0	00/0771/40			- · · · ·		`			
	POWER FACTOR (Typ.)			PF>0.98/115VAC, PF>0.95/230VAC, PF>0.92/277VAC at full load (Please refer to "Power Factor Characteristic" curve)  THD< 20% when output loading ≥50% at 115VAC/230VAC input and output loading ≥75% at 277VAC input										
	TOTAL HARMONIC DISTORTION			· ·			· · · · · · · · · · · · · · · · · · ·			· ·	1			
INPUT	EFFICIENCY (Typ	· ·	91.5%	92%	93%	93.5%	93.5%	93.5%	94%	94%	94%			
	AC CURRENT	12V	1.8A / 115VAC 0.8A / 230VAC 0.7A / 277VAC											
	(Typ.)	15V ~ 54V	2.1A / 115VAC 0.9A / 230VAC 0.8A / 277VAC											
	INRUSH CURRENT (Typ.)		COLD START 65A(twidth=445/us measured at 50% Ipeak) at 230VAC											
	LEAKAGE CURRENT		<0.75mA / 277VAC											
	OVER CURRENT		95 ~ 108%											
	OVERCONNENT		Protection type: Constant current limiting, recovers automatically after fault condition is removed											
	SHORT CIRCUIT		Constant current limiting, recovers automatically after fault condition is removed											
PROTECTION	OVER VOLTAGE		14 ~ 17V	18 ~ 21V	23 ~ 27V	28 ~ 34V	34 ~ 38V	41 ~ 46V	47 ~ 53V	54 ~ 63V	59 ~ 65V			
			Protection type: Shut down o/p voltage with auto-recovery or re-power on to recovery											
	OVER TEMPERATURE		Shut down o/p voltage, recovers automatically after temperature goes down											
	WORKING TEMP.		-40 ~ +70°C (Refer to "Derating Curve")											
	WORKING HUMID	OITY	20 ~ 95% RH non-condensing											
ENVIRONMENT	STORAGE TEMP., HUMIDITY		-40 ~ +80°C, 10 ~ 95% RH											
	TEMP. COEFFICIE		±0.03%/°C (0~50°C)											
	VIBRATION		10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes											
			UL8750, CSA C22.2 No. 250.0-08, EN61347-1, EN61347-2-13 independent IP65 or IP67, J61347-1, J61347-2-13 approved											
	SAFETY STANDA	RDS Note.7	design refer to UL60950-1, TUV EN60950-1											
SAFETY &	WITHSTAND VOI	TAGE	I/P-O/P:3.75KVAC											
EMC	WITHSTAND VOLTAGE		I/P-0/P. I/P-FG. O/P-FG:100M Ohms / 500VDC / 25°C/ 70% RH											
EIVIC	ISOLATION RESISTANCE		1/P-0/P, 1/P-FG, 0/P-FG: 100M 0nms / 500VDC / 25 C / 70% RH   Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≥50% load); EN61000-3-3											
	EMC EMISSION													
	EMC IMMUNITY		Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria A											
	MTBF		192.2K hrs min. MIL-HDBK-217F (25°C)											
OTHERS	DIMENSION		228*68*38.8n	,	·									
	PACKING		0. 1	s/14.8Kg/0.8Cl										
NOTE	Ripple & noise     Tolerance : inc     Please refer to	are measure cludes set up b "DRIVING N	cially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. sured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. up tolerance, line regulation and load regulation.  G METHODS OF LED MODULE".  I under low input voltages. Please check the static characteristics for more details.											


- 5. Derating may be needed under low input voltages. Please check the static characteristics for more details.
- 6. A type only.

- 8. App only.
  7. Safety and EMC design refer to EN60598-1, CNS15233, GB7000.1, FCC part18.
  8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.
  9. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 10. Refer to warranty statement.



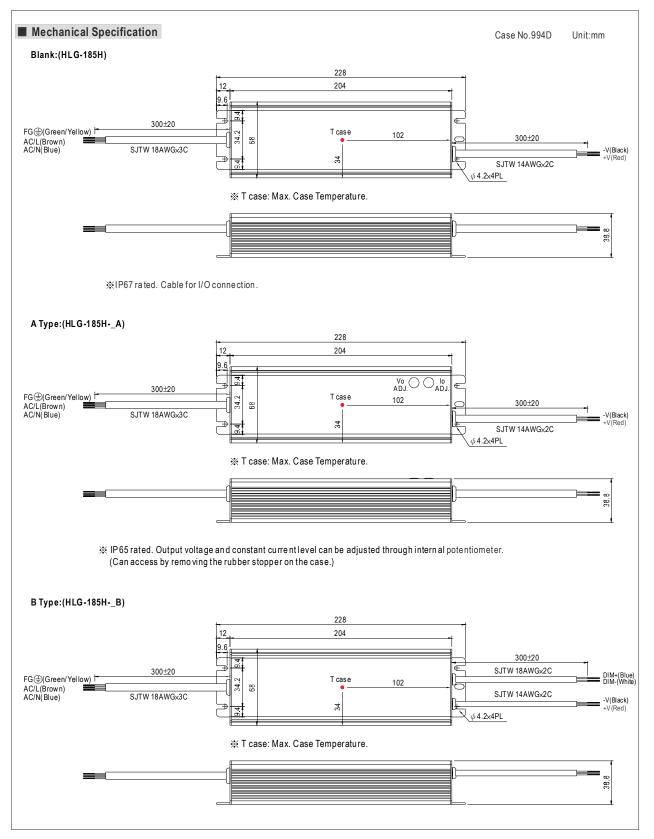




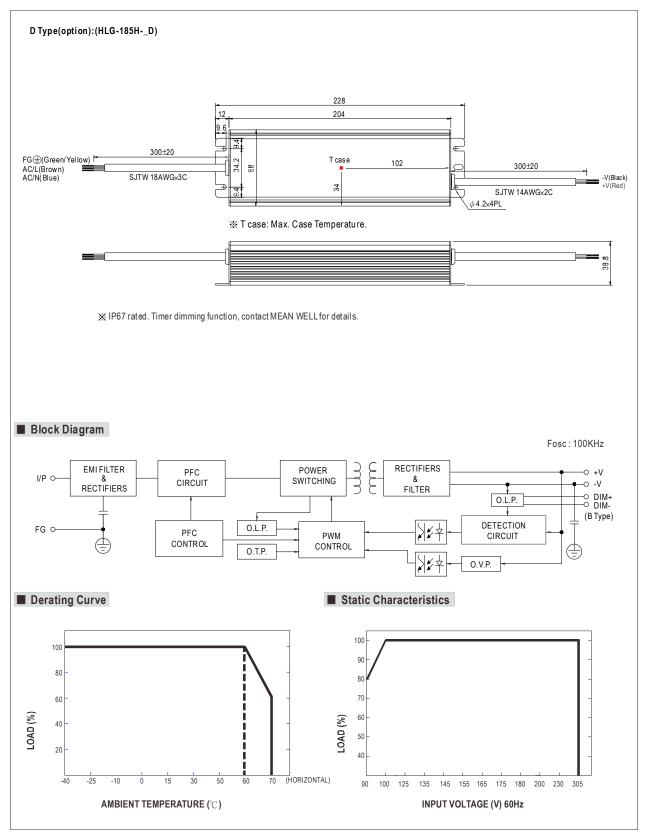




## ■ Power Factor Characteristic

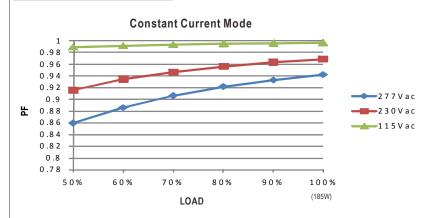

## **■** EFFICIENCY vs LOAD (48V Model)

HLG-185H series possess superior working efficiency that up to 94% can be reached in field applications.

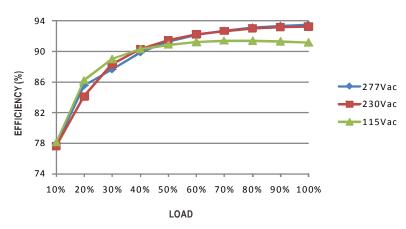


## ■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive me thod "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

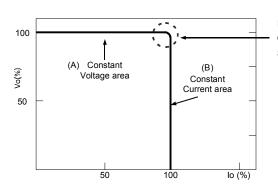


Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



# ■ DIMMING OPERATION (for B-type only)



- \*\* Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or
  - 1 ~ 10V dc or 10V PWM signal between DIM+ and DIM-.
- ※ Please DO NOT connect "DIM-" to "-V".
- X Reference resistance value for output current adjustment (Typical)

Resistance value	Single driver	10K Ω	20ΚΩ	30K Ω	40K $\Omega$	50K Ω	60K Ω	<b>70K</b> Ω	80K Ω	90K Ω	100K $\Omega$	OPEN
	Multiple drivers (N=driver quantity for synchronized dimming operation)	10KΩ/N	20KΩ/N	30KΩ/N	40KΩ/N	50KΩ/N	60KΩ/N	70KΩ/N	80KΩ/N	90KΩ/N	100K Ω /N	
Percentage of rated current		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

#### 

Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%


### $\times$ 10 V PWM signal for output current adjustment (Typical): Frequency range: 100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

XDirect connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/OFF :

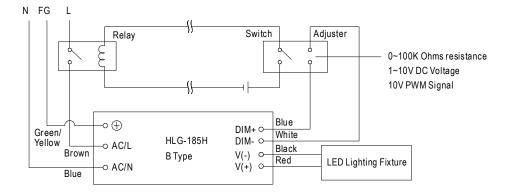

Using a switch and relay can turn ON/OFF the lighting fixture.

- 1.0 utput constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be turned ON/OFF by the switch.



