

# 5SLD 1200J450350

## HiPak DIODE Module

$$V_{RRM} = 4500 \text{ V}$$

$$I_F = 2 \times 1200 \text{ A}$$

Ultra low-loss, rugged SPT+ diode  
 Smooth switching SPT+ diode for good EMC  
 AlSiC base-plate for high power cycling capability  
 ALN substrate for low thermal resistance  
 2 diodes in 1 package  
 Improved high reliability package  
 Recognized under UL1557, File E196689



### Maximum rated values <sup>1)</sup>

Parameter	Symbol	Conditions	min	max	Unit
Repetitive peak reverse voltage	$V_{RRM}$	$T_{vj} \geq 25 \text{ }^\circ\text{C}$		4500	V
DC forward current	$I_F$			1200	A
Peak forward current	$I_{FRM}$	$t_p = 1 \text{ ms, per Diode}$		2400	A
Total power dissipation	$P_{tot}$	$T_C = 25 \text{ }^\circ\text{C, } T_{vj} = 125 \text{ }^\circ\text{C, per Diode}$		5300	W
Surge current	$I_{FSM}$	$V_R = 0 \text{ V, } T_{vj} = 125 \text{ }^\circ\text{C, } t_p = 10 \text{ ms, half-sinewave, per Diode}$		9000	A
Isolation voltage	$V_{isol}$	1 min, $f = 50 \text{ Hz}$		10200	V
Junction temperature	$T_{vj}$			150	$^\circ\text{C}$
Junction operating temperature	$T_{vj(op)}$		-50	125	$^\circ\text{C}$
Case temperature	$T_C$		-50	125	$^\circ\text{C}$
Storage temperature	$T_{stg}$		-50	125	$^\circ\text{C}$
Mounting torques <sup>2)</sup>	$M_s$	Base- heatsink, M6 screws	4	6	Nm
	$M_{t1}$	Main terminals, M8 screws	8	10	

<sup>1)</sup> Maximum rated values indicate limits beyond which damage to the device may occur per IEC 60747

<sup>2)</sup> For detailed mounting instructions refer to ABB Document No. 5SYA 2039

### Diode characteristic values <sup>3)</sup>

Parameter	Symbol	Conditions	min	typ	max	Unit
Forward voltage <sup>4)</sup>	$V_F$	$I_F = 1200 \text{ A}$	$T_{vj} = 25 \text{ °C}$	3.2	3.7	V
			$T_{vj} = 125 \text{ °C}$	3.5	4.0	V
Continuous reverse current	$I_R$	$V_R = 4500 \text{ V}$	$T_{vj} = 25 \text{ °C}$		0.5	mA
			$T_{vj} = 125 \text{ °C}$	23	46	mA
Reverse recovery current	$I_{rr}$		$T_{vj} = 25 \text{ °C}$	1460		A
			$T_{vj} = 125 \text{ °C}$	1600		A
Recovered charge	$Q_{rr}$	$V_{CC} = 2800 \text{ V}$ , $I_F = 1200 \text{ A}$ , $di/dt = 4.8 \text{ kA}/\mu\text{s}$ $L_\sigma = 150 \text{ nH}$ , inductive load switch: 5SNA 1200G450350 Per Diode	$T_{vj} = 25 \text{ °C}$	1030		$\mu\text{C}$
			$T_{vj} = 125 \text{ °C}$	1660		$\mu\text{C}$
Reverse recovery time	$t_{rr}$		$T_{vj} = 25 \text{ °C}$	1270		ns
			$T_{vj} = 125 \text{ °C}$	1860		ns
Reverse recovery energy	$E_{rec}$		$T_{vj} = 25 \text{ °C}$	1630		mJ
			$T_{vj} = 125 \text{ °C}$	2730		mJ

<sup>3)</sup> Characteristic values according to IEC 60747 - 2

<sup>4)</sup> Forward voltage is given at chip level

### Package properties <sup>5)</sup>

Parameter	Symbol	Conditions	min	typ	max	Unit
Diode thermal resistance junction to case	$R_{th(j-c)DIODE}$	Per Diode			0.019	K/W
Diode thermal resistance <sup>2)</sup> case to heatsink	$R_{th(c-s)DIODE}$	Per Diode, $\lambda$ grease = 1W/m x K		0.018		K/W
Partial discharge extinction voltage	$V_e$	$f = 50 \text{ Hz}$ , $Q_{PD} \leq 10 \text{ pC}$ (acc. To IEC 61287)	5100			V
Comparative tracking index	CTI		600			
Module stray inductance	$L_{\sigma AC}$	Per Diode		36		nH
Resistance, terminal-chip	$R_{AA'+CC'}$	Per Diode	$T_c = 25 \text{ °C}$	0.2		m $\Omega$
			$T_c = 125 \text{ °C}$	0.3		


<sup>2)</sup> For detailed mounting instructions refer to ABB Document No. 5SYA 2039

### Mechanical properties <sup>5)</sup>


Parameter	Symbol	Conditions	min	typ	max	Unit
Dimensions	L x W x H	Typical		130 x 140 x 48		mm
Clearance distance in air	$d_a$	according to IEC 60664-1 and EN 50124-1	Term. to base:	40		mm
			Term. to term:	26		
Surface creepage distance	$d_s$	according to IEC 60664-1 and EN 50124-1	Term. to base:	64		mm
			Term. to term:	56		
Mass	m			980		g

<sup>5)</sup> Package and mechanical properties according to IEC 60747 - 15

## Electrical configuration

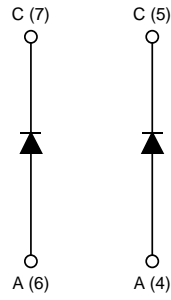

## Outline drawing <sup>2)</sup>

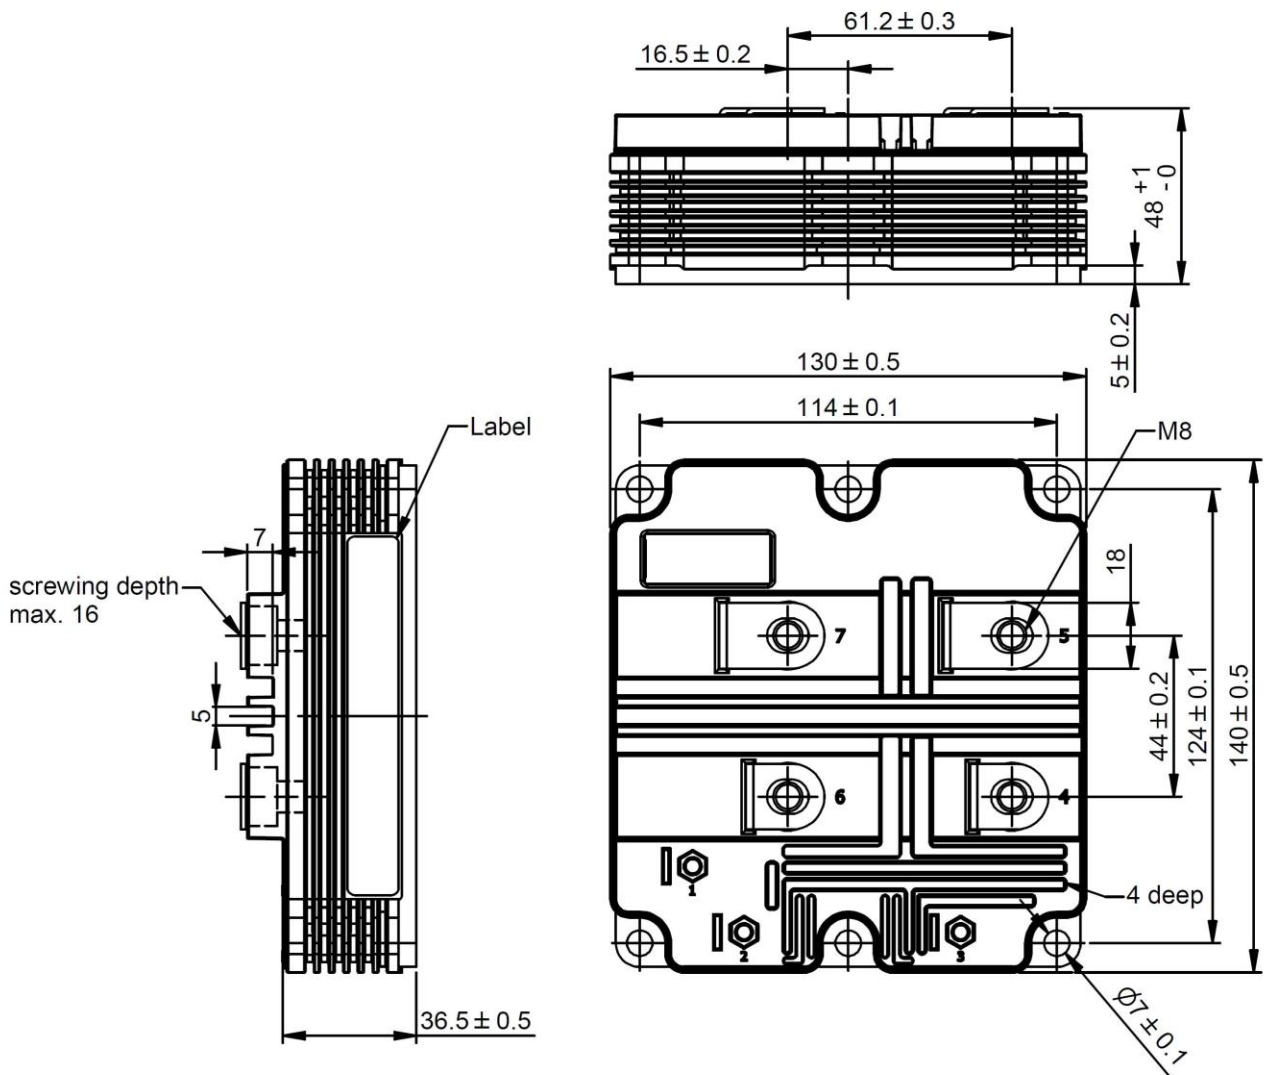

Note: all dimensions are shown in millimeters

<sup>2)</sup> For detailed mounting instructions refer to ABB Document No. 5SYA 2039

This is an electrostatic sensitive device, please observe the international standard IEC 60747-1, chap. VIII.  
This product has been designed and qualified for Industrial Level.

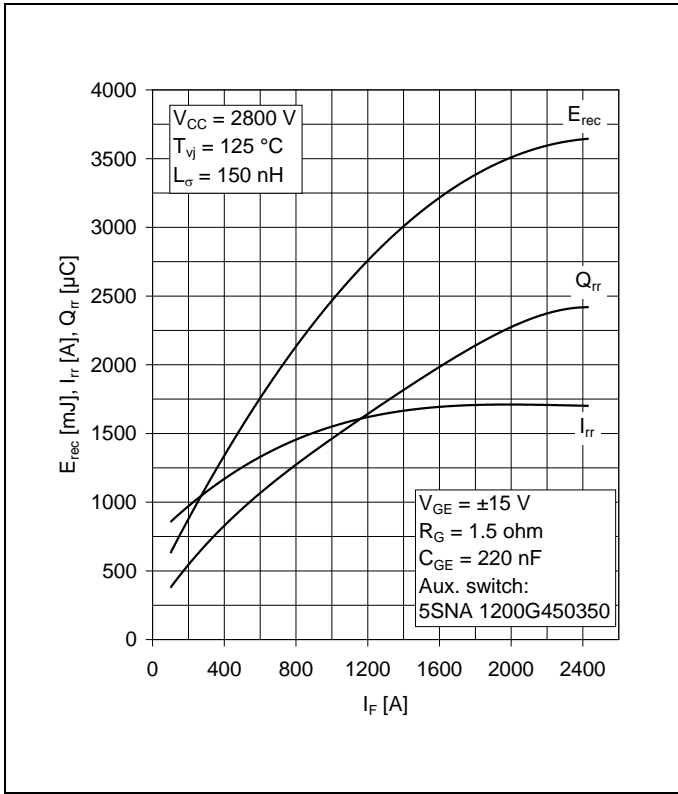


Fig. 1 Typical reverse recovery characteristics vs. forward current

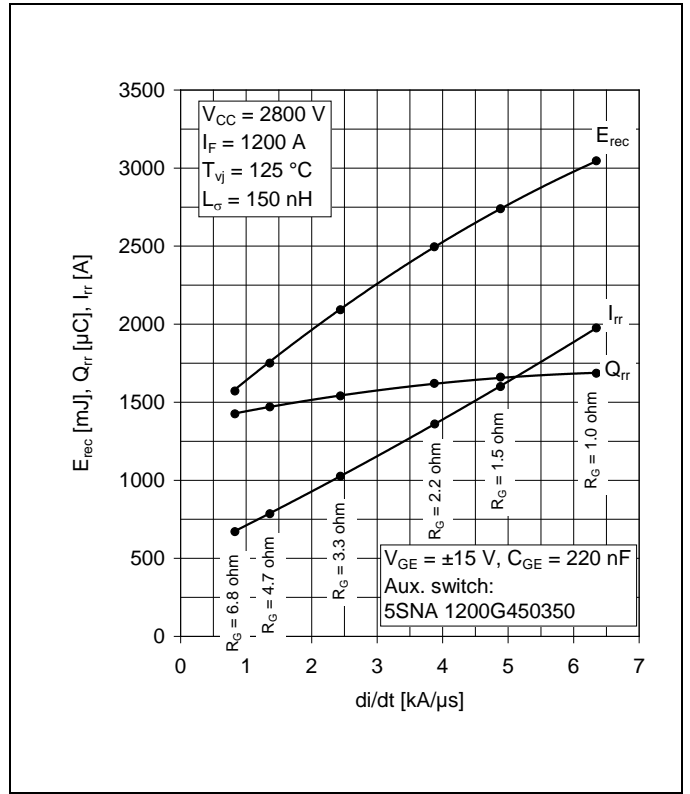


Fig. 2 Typical reverse recovery characteristics vs. di/dt

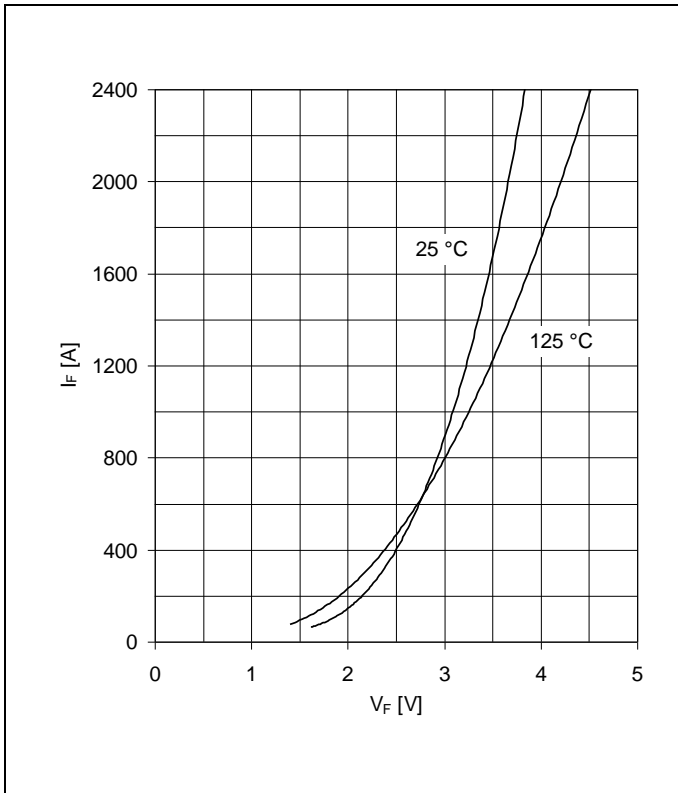


Fig. 3 Typical diode forward characteristics chip level

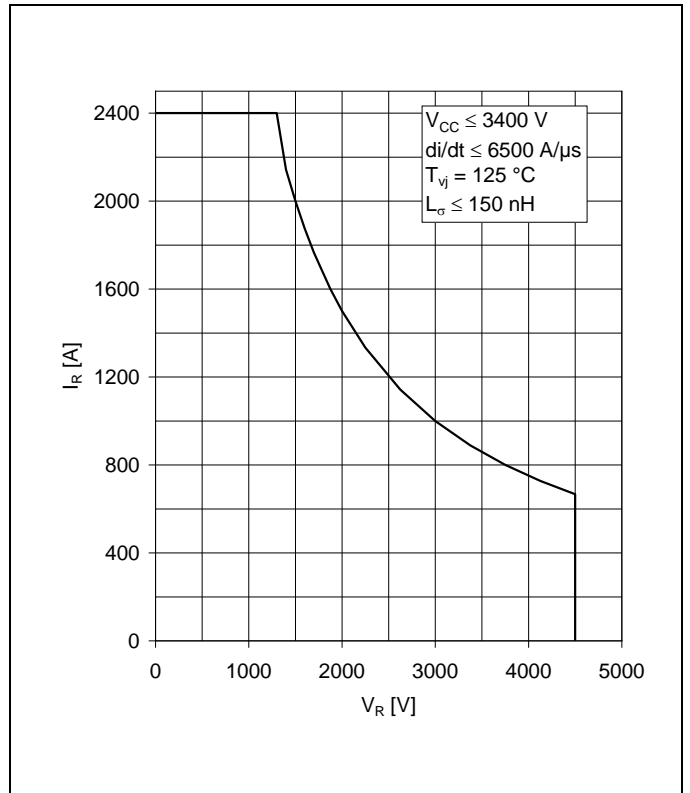


Fig. 4 Safe operating area diode (SOA)

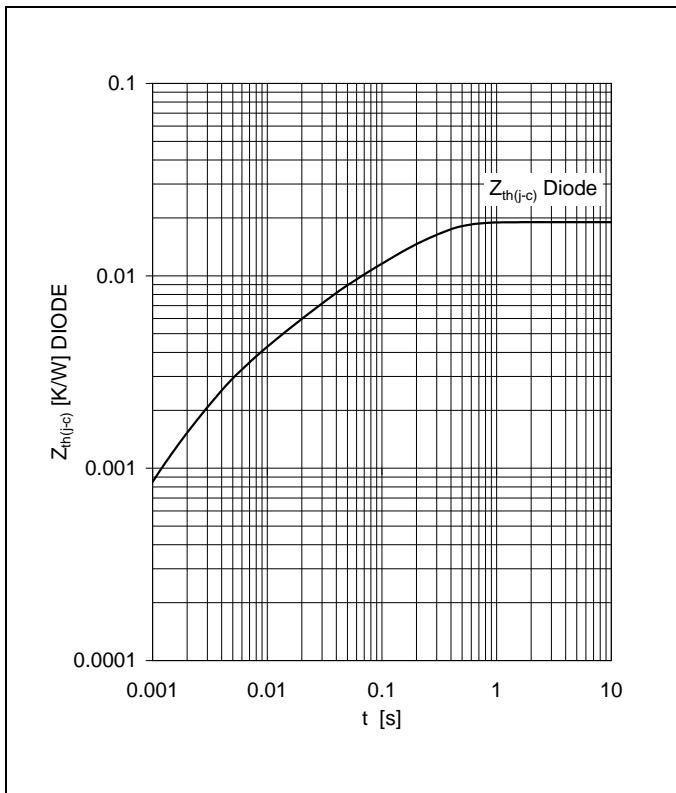


Fig. 5 Thermal impedance vs. time

Analytical function for transient thermal impedance:

$$Z_{th(j-c)}(t) = \sum_{i=1}^n R_i (1 - e^{-t/\tau_i})$$

	i	1	2	3	4	5
DIODE	R <sub>i</sub> (K/kW)	12.5	4.37	2.16		
	τ <sub>i</sub> (ms)	192	22.6	3.1		

**Related documents:**

- 5SYA 2042 Failure rates of HiPak modules due to cosmic rays
- 5SYA 2043 Load - cycle capability of HiPaks
- 5SYA 2045 Thermal runaway during blocking
- 5SYA 2057 IGBT diode safe operating area (SOA)
- 5SYA 2058 Surge currents for IGBT diodes
- 5SYA 2093 Thermal design of IGBT modules
- 5SZK 9111 Specification of environmental class for HiPak Storage
- 5SZK 9112 Specification of environmental class for HiPak Transportation
- 5SZK 9113 Specification of environmental class for HiPak Operation (Industry)
- 5SZK 9120 Specification of environmental class for HiPak

ABB Switzerland Ltd.  
Semiconductors  
Fabrikstrasse 3  
CH-5600 Lenzburg  
Switzerland

Phone: +41 58 586 1419  
Fax: +41 58 586 1306  
E-Mail: abbsem@ch.abb.com  
Internet: www.abb.com/semiconductors

We reserve the right to make technical changes or to modify the contents of this document without prior notice.

We reserve all rights in this document and the information contained therein. Any reproduction or utilization of this document or parts thereof for commercial purposes without our prior written consent is forbidden.

Any liability for use of our products contrary to the instructions in this document is excluded.