

SPECIFICATIONS

Mechanical

Mating Force: 21.5N max
Unmating Force: 5.9N min.

Electrical


Voltage Rating: 750V
Current Rating: 1A
Signal Contact Resistance: 22mΩ max.
Shield Contact Resistance: 40mΩ max.
Dielectrical Withstanding Voltage: 500V

Physical


Housing: LCP, UL 94-0 rated, Ivory White
Shield: Phosphor Bronze
Contact: Phosphor Bronze
Plating: See "ORDERING INFORMATION"

FOXTRAL CONNECTOR

1F Series
Header Press-fit Type
2.0mm [.078"] Pitch
5 Rows



DRAWING

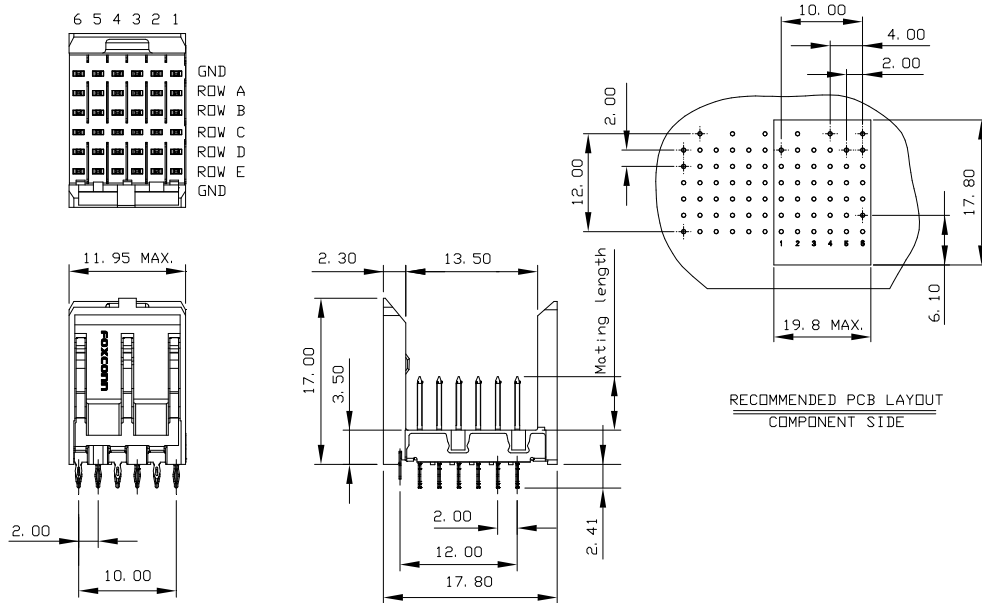

ORDERING INFORMATION

PRODUCT NO.: 1F35036A-P0*MS*-*

