

SPECIFICATIONS


Constituent
 DB 9 MALE + Raw cable +DB 9 FEMALE

Electrical
 TEST TIME:0.1S
 Contact Resistance: 10hm
 DRAIN RESISTANCE:0.50hm
 Isolation :100Mohm/500VDC

D-sub cable assembly
 9 PIN D-SUB CABLE ASSY



DRAWING

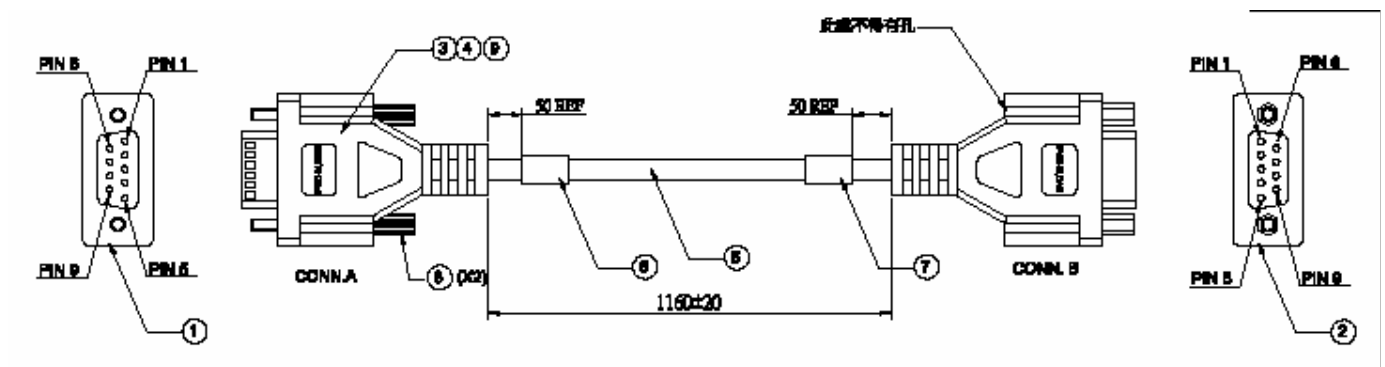

ORDERING INFORMATION

PRODUCT NO : CD XX X XX B XX - XXX - EF
 CD='D' TYPE CABLE
 NO. OF POSITION
 09=9PIN
 15=15PIN
 25=25PIN
 CABLE TYPE
 A=NONE SHIELDING
 B=SINGLE SHIELDING(AL/TP)
 C=SINGLE SHIELDING(BRAID)
 D=DOUBLE SHIELDING
 B=9 POSITION
 XX=2nd Plug-end Type
 N=DIN CONN
 D='D' TYPE CONN
 S=HOUSING(SOCKET)
 XXX=Extension code
 NO. OF POSITION
 01=1 POSITION
 09=9 POSITION
 CABLE LENGTH
 01=1FT DOWN
 02=1~2FT
 100=99~100FT
 EF=Lead free

CD09B04D09-N70-EF	1160 [20]
P/N	DIM.A