

SPECIFICATIONS

Constituent

dvi 19pin+core+cable+core+dvi 19pin+screw 4-40UNC

Mechanical

Bending Test:300g \pm 90 °

R:25.4mm;20cycle/1min.500 times

Electrical

Voltage Rating: 30V DC

Current Rating:0.5A

Physical

D-SUB Overmold: White

Operating Temperature:0 °C to +80 °C

Agency Approvals

Cable:UL E343577


D-SUB Cable

CD09 Series

D-sub 9 pos. to 9 pos cable



DRAWING

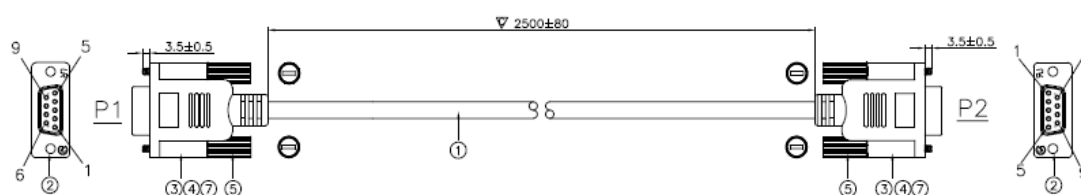

ORDERING INFORMATION

PRODUCT NO.:CD09C08D09-C54-DF