


REV.	ECN. NO.	APPD.
A	BC-07-7054737	Joe J.F.Chien

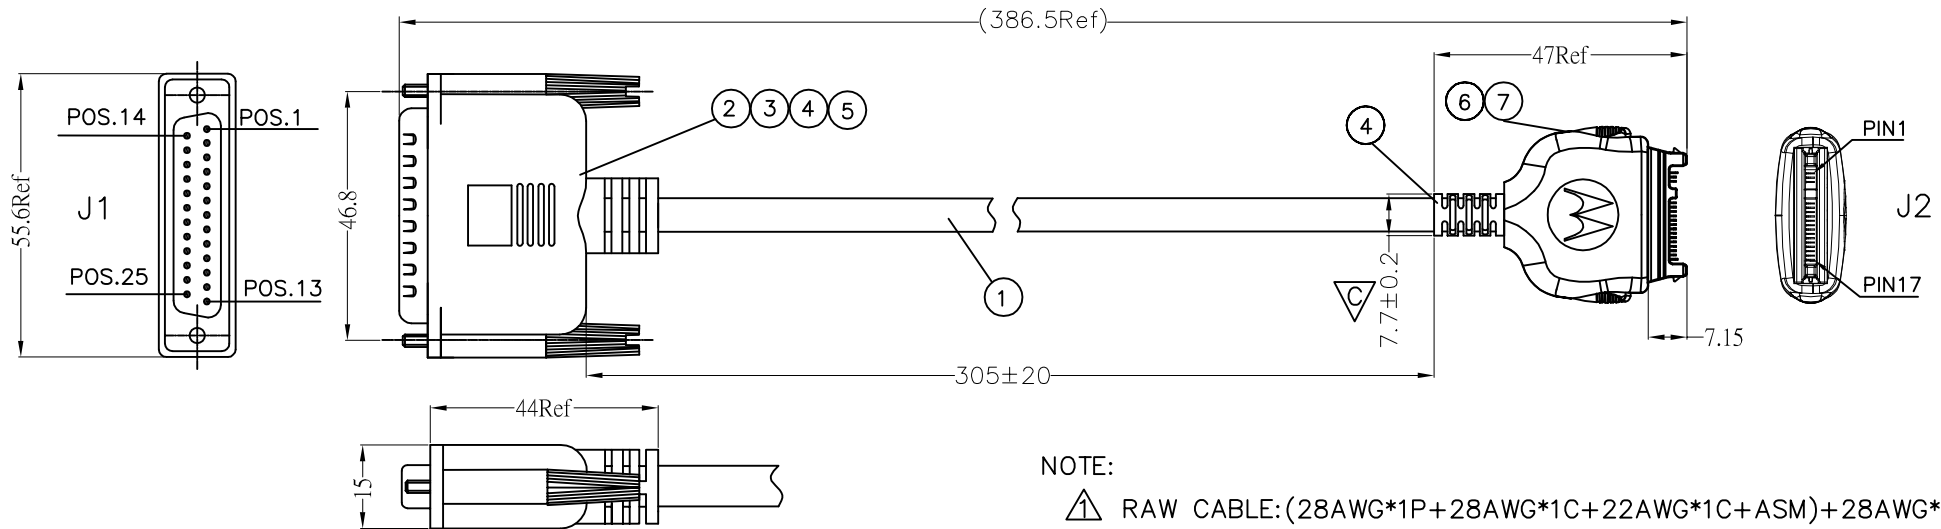

NOTE:

△ RAW CABLE:(28AWG\*1P+28AWG\*1C+22AWG\*1C+ASM)+28AWG\*11C +24AWG\*1C+22AWG\*1C BLACK PVC ø6.2mm

2. ELECTRICAL TEST SPECIFICATION:

- 2.1. OPEN/SHORT TEST:100%.
- 2.2. CONTACT RESISTANCE: 5 OHMS MAX.
- 2.3. INSULATION RESISTANCE: 10M OHMS MIN/300 VDC.

3. "C" SHOW IMPORTANT DIMENSION.

4. HARMFUL MATERIAL CONTROL PLEASE FOLLOW DOC. NO."EPI12"

5. PLEASE CONTACT FOXCONN SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

PIN OUT				
DB25 MALE J1	WIRE GAUGE	COLOR	SIGNAL NAME	17P PLUG J2
1	22	BLACK	GROUND	1
2	28	BROWN		2
3	22	RED	POWER	3
4	28	GREEN	TX/USB+	4
5	28	WHITE	TX/USB-	5
6	28	BLACK	RTS/USB PWR	6
7	28	YELLOW		7
8	28	BLUE		8
9	28	VIOLET		9
10	28	GRAY		10
11	28	PINK		11
12	28	WHITE/BLACK		12
13	28	WHITE/BROWN		13
14	28	WHITE/RED		14
15	28	WHITE/ORANGE		15
16	28	WHITE/YELLOW		16
17	24	ORANGE		17
18~25				

7	PCB	1	01-01009014-00	0.6MM THICKNESS
6	17PIN PLUG	1	QS20173-S05-4F	CONTACT PLATED GOLD , 0.5MM PITCH
5	SCREW FOR D-SUB 25P CONN.	2	060-0052-311	#4-40 UNC 2A, UL 94V-0, ABS, BLACK
4	OVER MOLD	1	901-0101-024	UL 94V-0, PVC, BLACK
3	INNER MOLD	1	901-0103-008	PE
2	D-SUB 25P CONN.(MALE)	1	070-03F1-212	CONTACT PLATED :GOLD FLASH
1	CABLE	A/R	015-0001-1265	REFER TO △
NO.	DESCRIPTION	Q'TY	P/N	REMARK
X.±0.35	X°± /	UNITS	MM	NAME(INTENDED USE)
.X±0.25	.X°± /	MAT'L		CUSTOMER DRAWING
.XX±0.15	.XX°± /			PART NO.(INTENDED USE)
.XXX± /	.XXX°± /	FINISH		CQM17D02D25-T11-EF
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON HAI PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON HAI PRECISION IND. CO., LTD.				APPD: Joe.J.F.Chien 10/15'07
				CHKD: Wayne Chen 10/15'07
				DR: Rock Zhang 10/15'07
				TITLE: DB25 MALE TO 17PIN PLUG (DCM02712)
				DWG NO.: 605-0000-2287
				SCALE SHEET REV.
				NONE 1/1 A