
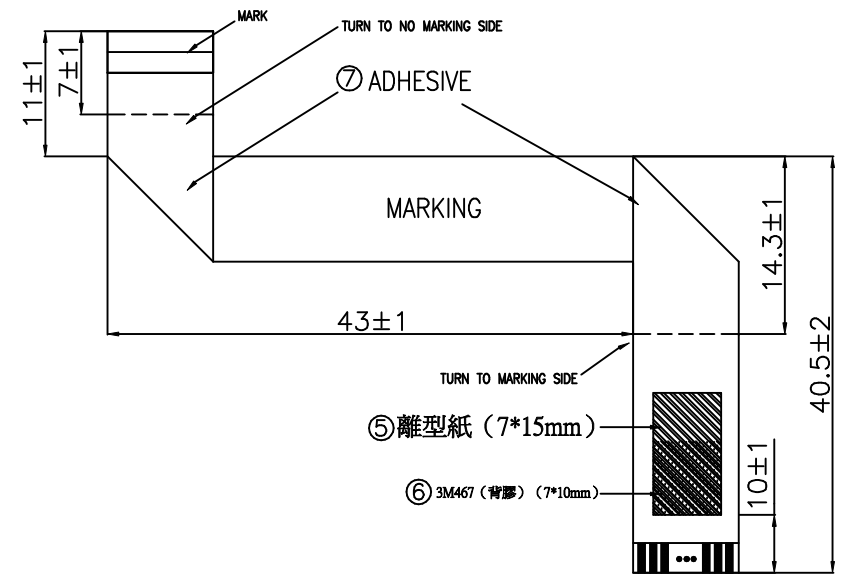

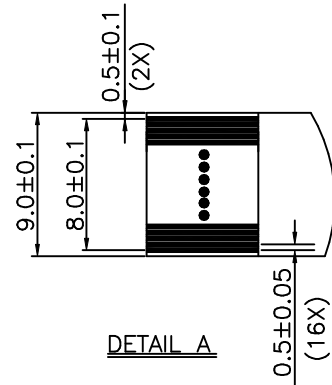
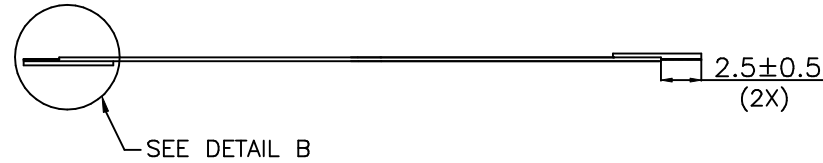


REV	ECN.	NO.	APPD.
A	BC-12-00880108		Paul
B	BC-13-0076110		Camvard
BX1	BS-14-138177		Paul

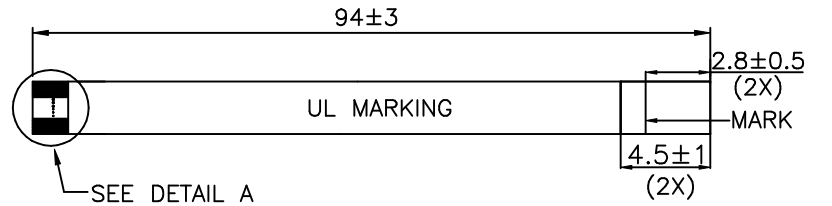

NOTE:

- ELECTRICAL:
 - DIELECTRIC STRENGTH: 300V DC/10ms.
 - INSULATION RESISTANCE: 10M OHMS MIN
 - CONTINUITY RESISTANCE: 5 OHMS MAX.
- OPERATING TEMPERATURE: -10°C~80°C.
- HARMFUL MATERIAL CONTROL PLEASE FOLLOW DOC. NO."EPI12".
- THE MARK LINE IS 0.5MM WIDE.

7	ADHESIVE	N/A	N/A	N/A
6	3M467 (背膠)	N/A	7*10MM	N/A
5	離型紙	N/A	7*15MM	N/A
4	POLYESTER	905-3914-*	120MM WIDTH 25/37 UM THICK	N/A
3	BACKING TAPE	906-6632-*	36MM WIDTH 175/30UM THICK	N/A
2	COPPER WIRE	907-3321-*	TINNED COPPER,0.3*0.035MM	N/A
1	POLYESTER	905-3913-*	120MM WIDTH 25/37 UM THICK	N/A
ITEM	PART NAME	FOXCONN P/N	DESCRIPTION	Q'TY

X.±	X°.±	UNITS	NAME<INTENDED USE>	FOXCONN
.X±0.5	.X°.±	mm	CUSTOMER	HON HAI PRECISION IND. CO.,LTD. TAIPEI, TAIWAN, R.O.C.
.XX±0.05	.XX°.±	MAT'L	PART NO.<INTENDED USE>	TITLE:
.XXX±	.XXX°.±	FINISH	FF17002-OG-EF	17Pin 0.5mm Pitch FFC
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON HAI PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON HAI PRECISION IND. CO., LTD.			APPD: Paul 12/12'13	DWG NO.:
			CHKD: Lihong Qiu 12/12'13	363-0000-176
			DR: Ji yanqing 12/12'13	SCALE SHEET REV.:
				N/A 1/1 BX1