

SPECIFICATIONS

Mechanical

Mating Force: 0.68Kg (1.50Lb) min. and 4Kg (8.82 Lb) max.

Unmating Force: 0.68Kg (1.50Lb) min.

Electrical

Current Rating: 0.5A

Contact Resistance: 40mW max.

Dielectric Withstanding Voltage: 500V

Insulation Resistance: 1000MW min.

Physical

Housing: Thermoplastic, UL 94V-0 rated in Black Color


Contact: Copper alloy

Grounding Plate: Copper alloy


Plating: See "ORDERING INFORMATION" **Operating Temperature:** -20 to +60


PCMCIA Socket Connector

WSD Series SMT Type 1.27mm [.050"] Pitch 68 Pos.



DRAWING

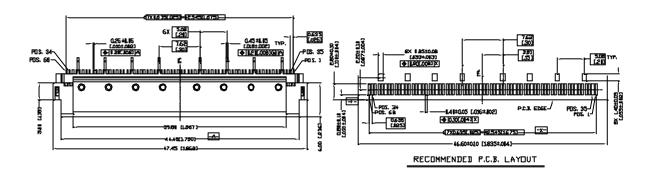



ORDERING INFORMATION

