



Model FV 10F 01A
(Soldered terminal)



Model FV 10F 01B
(Screwed terminal)



pin and pushbutton type, either the solder terminal or the screw terminal.

Dimensions and Specifications

Dimensions and specifications conform to the model JIS C 4505V 10F of Japanese Industrial Standards.

Terminals and Contact Indications

Contacts are all made single-pole double throw. They can be used for normally-closed type or normally-opened type, depending on purpose. Terminals are either solder terminals or screw terminals. Because of a unique snap action mechanism, positions of solder or screw terminals are reversed with those marketed generally. To avoid installation difficulties, contact indications must be followed exactly!

(By Y. Fujishiro, Standard Electric Machine and Apparatus Dept.)

Ratings

Rated Voltage (v)	Rated Current (amp)			
	AC		DC	
	Non-Inductive Load	Inductive Load	Non-Inductive Load	Inductive Load
125	10	6	0.4	0.1
250	6	4	0.3	0.05

Models

Two models of terminals are available for both the

FUJI AIR CONDITIONER, STANDARD MODEL RWT87

Here's high-capacity cooler at an exceptionally low cost! You get all the advanced features of conventional air conditioners, plus a new germicidal filter that not only cleans the air but kills germs, too! With this handsome model that cools, dehumidifies, filters, and circulates the air, you can enjoy complete air conditioned comfort economically.

Cooling: A powerful compressor supplies your room with ample cool air.

Dehumidifying: Moisture is constantly removed from the air, keeping your room refreshingly cool.

Air-purifying: A germicidal polyurethane filter even removes invisible dust particles from the air and kills germs as well, creating a cleaner, healthier environment.

tecumseh and special sound-proofing material


Below NCA 55 at "High"

Below NCA 50 at "Low"

3) Permanent, washable filter made of bacteria-killing polyurethane.

4) An overload protection relay

Should the equipment become overloaded from one cause or another, a safety device will suspend the operation of the compressor. After the overload problem has been detected and corrected, normal operation resumes by turning the switch to "COOL".

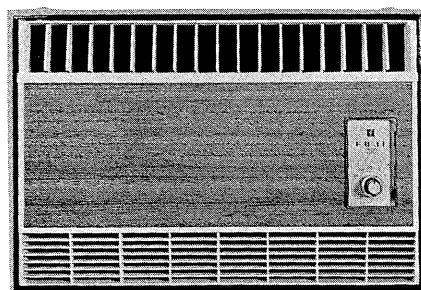

Special Features

- 1) An outstanding moisture removal at 3.2 pint/hr
- 2) Extra-quiet operation through the use of

5) Adjustable air flow and direction

Air flow at the blow-off port can be adjusted to "High" and "Low". Set the switch at (HI) for normal use. For almost silent operation, turn the switch to (LO) which turns the blower at a slower speed cooling quietly. Air direction can be easily adjusted by turning the grille either right or left.

6) Simple to operate

One double rotary system dial turns the unit on or off, cools, dehumidifies, filters, circulates air, controls fan speeds, etc.

7) Continental type wood-grain design cabinet

8) Easy installation, maintenance and inspection

Rooms to be Cooled

Office	25~33 m ² (269~355 sq. ft)
Restaurant, coffee shop	13~20 m ² (140~215 sq. ft)
Bank	25~33 m ² (269~355 sq. ft)
Stores, department store	13~20 m ² (140~215 sq. ft)
Beauty parlor, barber shop	13~20 m ² (140~215 sq. ft)
Home	25~33 m ² (269~355 sq. ft)

Specifications

Model		Unit	RWT 87
Power Supply			Single phase 110, 200, 220 & 230 v 50/60 c/s
Rated Output		kw	0.75
Cooling Capacity		Btu/hr	8000/8800 50/60 c/s
Moisture Removal		Pt/hr	3.2
Outside Dimensions	Height	mm (inch)	403 (16 1/8")
	Width		600 (24")
	Depth		500 (20")
Cooling System	Compressor	Type	Fully enclosed type
		Rated output	0.75
	Cooler		Plate fin type
	Condenser		Plate fin type
Ventilation Device	Refrigerant		R-22
	Exterior fan		Sirocco fan
	Interior fan		Propeller fan
	Blower motor	Type	2 step variable speed single-phase induction motor
	Rated output	w	50
Controlling Device	Control switch		Double rotary switch
	Fan adjusting switch		Double rotary switch
Sound and Vibration Proof Device			Shock mounted; Lined with sound-proof, and thermal insulating material
Air Filter			Foam polystyrene air filter
Blow-off Grille			Direction of wind adjustable
Weight		lbs kg	132 60
Standard Accessories			4 m (13 ft) grounding wire 1 amp fuse x 1

(By K. Uekuri, Foreign Trade Dept.)