


PRODUCT SPECIFICATION

SI230 – 1 Amp Changeover Relay

SI230DIM

SI230DIM-S (Complete W/ Remote Box)

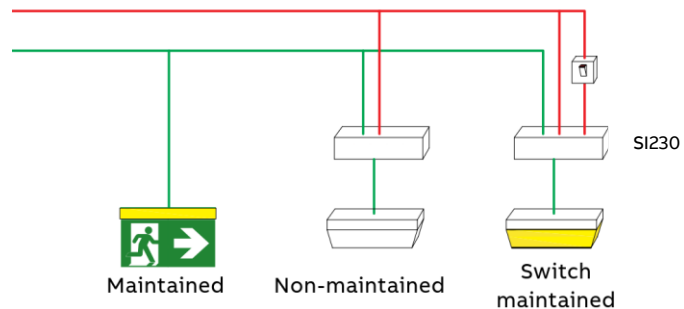

SI230 Changeover Relays are compact and east to install. When using these changeover relays, switched maintained emergency luminaires are energized whenever a local switched supply is present and automatically when a local sub-circuit failure occurs.

Electrical	Supply Voltage:	230/230 V AC
	Supply Current:	17 mA
	Mains Frequency:	50 Hz
	Nominal Power:	3.2 W
	Relay Type:	2 x 2 Pole Change-over Relay
	Relay Voltage Rating:	230/240 V
	Relay Current Rating :	3 A (Max) AC
Construction	Enclosure Material:	Galvanised Steel
	Operating temperature range:	0-70°C
	Ingress class:	IP20
	Enclosure dimensions:	155mm L x 41mm W x 36mm H
	Weight: No Box / Box	0.29 KG / 1.282 KG
Product standards	UK & Europe:	Changeover Voltage in Compliance with BS EN60598-2-22

The content of this ABB document has been checked carefully for accuracy at the time of print. However, ABB does not give any warranty of any kind, expressed or implied in this respect and shall not be liable for any loss or damage that may result from any use or as a consequence of any inaccuracies in or any omissions from the information which it may contain. We reserve the right to modify, update products as part of our policy of continuous product development. E&OE

EMERGI-LITE	DOCUMENT ID.	DATE.	PAGE
	SI230 - Spec	SEP 20	1/1