

TECHNICAL DATA SHEET

# PMAFIX IP68 - NVNZ-M/B - Strain relief fitting

## Straight, metric thread with fire barrier function

**PMA**



IP68, metal thread strain relief fitting with fire barrier function for flexible non-metallic conduit



### Applications:

- Fire barrier function
- In railway vehicle and heavy machine construction
- For separation of damp and dry areas

### Features & Benefits:

- Very high impact resistance
- With integrated strain relief for optimal ingress protection at the cable
- Tested according to EN45545-3 (E15)
- Vibration-resistant connection to PMA conduits
- Easy assembly
- High conduit pull-out strength
- Fits both conduit profiles - fine (T) and coarse (G)

### Ingress protection:

- IP66, IP68 & IP69 (EN/IEC 60529)
- IP68 (up to 10 bar at the cable)
- IP69, 100 bar with Water impact protection (WPS-ring)

### Materials:

- Fitting body: high-grade, specially formulated polyamide 6
- Thread: nickel-plated brass
- Sealing insert: flame retarded TPE

### Compatible with:

- PMAFLEX Pro Conduits
- PMAFLEX Multilayer Conduits
- PMAFLEX Conduits
- PMA Smart Line Conduits

### Conforms to:

- EN 45545-2 HL3 (R22 & R23)
- EN 45545-3 E15 (min)
- NFPA 130
- UL 94 (V0)

### Weathering resistance:

- Very good UV resistance and weathering characteristics

### Colour:

- Black

### Chemical properties:

- Please refer to [www.pma.ch](http://www.pma.ch)
- (Technical Information / Chemical Resistance)


### Environmental properties:

- Free from halogens and cadmium
- RoHS and REACH compliant

**Product selection:**

Part no.		Thread size	Conduit size	Cable clamping range in mm	Dimensions in mm (nom.)					Weight	Packing unit
black	Sealing insert	metric	NW	K	g	L	d2	SW1	SW2	kg/100pcs	pcs/PU
NVNZ-M120S/B1	EK 150b7	M12x1.5	10	4.0 - 6.5	5.0	48.5	23.0	17	21	1.7	50
NVNZ-M120S/B2	EK 150b8	M12x1.5	10	5.0 - 8.0	5.0	48.5	23.0	17	21	1.7	50
NVNZ-M120S/B3	EK 150b9	M12x1.5	10	6.5 - 9.5	5.0	48.5	23.0	17	21	1.7	50
NVNZ-M160S/B1	E 150b7	M16x1.5	10	4.0 - 6.5	6.0	49.5	23.0	18	21	2.6	50
NVNZ-M160S/B2	E 150b8	M16x1.5	10	5.0 - 8.0	6.0	49.5	23.0	18	21	2.6	50
NVNZ-M160S/B3	E 150b9	M16x1.5	10	6.5 - 9.5	6.0	49.5	23.0	18	21	2.6	50
NVNZ-M202S/B1	E 152b7	M20x1.5	12	4.0 - 6.5	6.5	54.0	28.5	22	26	3.6	50
NVNZ-M202S/B3	E 152b9	M20x1.5	12	6.5 - 9.5	6.5	54.0	28.5	22	26	3.6	50
NVNZ-M202S/B4	E 152b11	M20x1.5	12	7.0 - 10.5	6.5	54.0	28.5	22	26	3.6	50
NVNZ-M207S/B1	E 152b7	M20x1.5	17	4.0 - 6.5	6.5	60.0	31.0	22	28	4.3	50
NVNZ-M207S/B2	E 152b8	M20x1.5	17	5.0 - 8.0	6.5	60.0	31.0	22	28	4.3	50
NVNZ-M207S/B3	E 152b9	M20x1.5	17	6.5 - 9.5	6.5	60.0	31.0	22	28	4.3	50
NVNZ-M207S/B4	E 152b11	M20x1.5	17	7.0 - 10.5	6.5	60.0	31.0	22	28	4.3	50
NVNZ-M207S/B5	E 152b13	M20x1.5	17	9.0 - 13.0	6.5	60.0	31.0	22	28	4.3	50
NVNZ-M253S/B5	EK 154b13	M25x1.5	23	9.0 - 13.0	7.5	72.5	39.5	30	36	8.2	30
NVNZ-M253S/B6	EK 154b16	M25x1.5	23	11.5 - 15.5	7.5	72.5	39.5	30	36	8.2	30
NVNZ-M257S/B4	E 153b11	M25x1.5	17	7.0 - 10.5	7.5	61.5	31.0	28	28	6.1	50
NVNZ-M257S/B5	E 153b13	M25x1.5	17	9.0 - 13.0	7.5	61.5	31.0	28	28	6.1	50
NVNZ-M257S/B6	E 153b16	M25x1.5	17	11.5 - 15.5	7.5	61.5	31.0	28	28	6.1	50
NVNZ-M323S/B4	E 154b18	M32x1.5	23	14.0 - 18.0	8.0	73.0	39.5	35	36	10.9	30
NVNZ-M323S/B5	E 154b20	M32x1.5	23	17.0 - 20.5	8.0	73.0	39.5	35	36	10.9	30
NVNZ-M329S/B2	EK 155b18	M32x1.5	29	14.0 - 18.0	8.0	73.0	46.5	40	43	14.3	20
NVNZ-M329S/B3	EK 155b20	M32x1.5	29	17.0 - 20.5	8.0	73.0	46.5	40	43	14.3	20
NVNZ-M329S/B4	EK 155b25	M32x1.5	29	20.0 - 25.0	8.0	73.0	46.5	40	43	14.3	20
NVNZ-M406S/B1	E 156b25HF	M40x1.5	36	20.0 - 25.0	9.0	87.0	60.5	50	55	19.5	20
NVNZ-M406S/B2	EK 156b28	M40x1.5	36	24.0 - 28.0	9.0	87.0	60.5	50	55	19.5	20
NVNZ-M406S/B3	EK 156b32	M40x1.5	36	27.0 - 32.0	9.0	87.0	60.5	50	55	19.5	20
NVNZ-M409S/B1	E 155b16	M40x1.5	29	11.5 - 15.5	8.0	73.0	47.0	43	43	16.4	20
NVNZ-M409S/B2	E 155b18	M40x1.5	29	14.0 - 18.0	8.0	73.0	47.0	43	43	16.4	20
NVNZ-M409S/B3	E 155b20	M40x1.5	29	17.0 - 20.5	8.0	73.0	47.0	43	43	16.4	20
NVNZ-M409S/B4	E 155b25	M40x1.5	29	20.0 - 25.0	8.0	73.0	47.0	43	43	16.4	20
NVNZ-M409S/B5	E 155b28	M40x1.5	29	24.0 - 28.0	8.0	73.0	47.0	43	43	16.4	20
NVNZ-M506S/B1	E 156b32	M50x1.5	36	27.0 - 32.0	10.0	89.5	60.5	54	55	22.9	20
NVNZ-M506S/B3	E 156b36	M50x1.5	36	32.0 - 36.0	10.0	89.5	60.5	54	55	22.9	20
NVNZ-M508S/B2	E 157b36HF	M50x1.5	48	32.0 - 36.0	10.0	92.0	66.0	57	60	25.2	10
NVNZ-M508S/B3	E 157b40HF	M50x1.5	48	36.0 - 40.0	10.0	92.0	66.0	57	60	25.2	10
NVNZ-M638S/B1	E 158bm1x35	M63x1.5	48	32.0 - 35.0	10.0	90.5	76.5	68	70	40.0	10
NVNZ-M638S/B2	E 158b44	M63x1.5	48	39.0 - 44.0	10.0	90.5	76.5	68	70	40.0	10

Our customer service dept. or local distribution partner will be pleased to help you concerning product availability and lead time

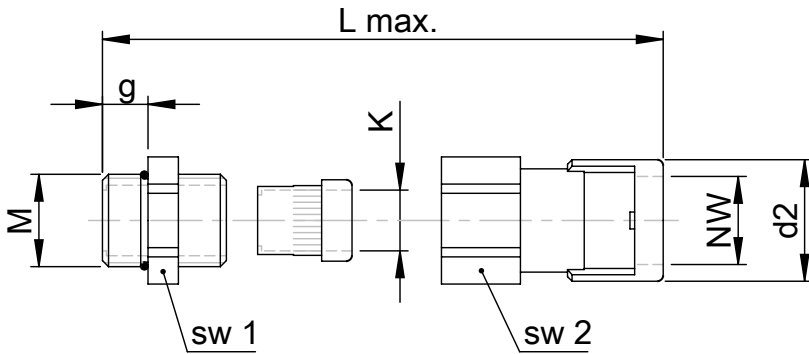


### Sealing system

Graduation of the clamping area in the UNI sealing system achieves optimal transfer of the clamping force to the cables. Distribution of the pressure through the sealing insert avoids damage to the cables. At the same time optimal sealing and strain relief are provided. Even when not completely tightened the sealing insert membrane offers sealing to IP54.

Temperature range sealing insert Pflitsch:  $-40 \dots +135 \text{ }^{\circ}\text{C}$

If several conductors are used with the connector multiple sealing inserts should be considered.

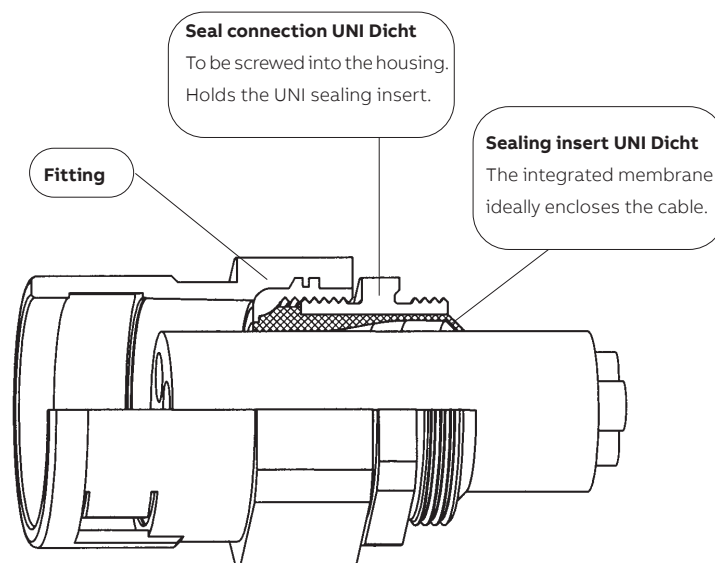

Mechanical Properties:	Value:	Test parameters:	Test method:
Tensile modulus	1'200 ... 3'700 N/mm <sup>2</sup>		ISO 527
Tensile strength	45 ... 65 N/mm <sup>2</sup>		ISO 527
Notched bar impact test	4 ... 20 kJ/m <sup>2</sup>		ISO 180/1C
Vibration and shock standard	Cat. 2		IEC 61373, IEC 60068-2-27 / -64

Thermal properties:	Value:	Test parameters:	Test method:
Continuous application temperature	-50 ... +105°C		PMA DO 9.21-4510
Upper application temperature	+120°C	(20'000 h)	PMA DO 9.21-4360
Short-term	+160°C	(168 h)	PMA DO 9.21-4360

Fire safety properties:	Value:	Test parameters:	Test method:
Fire barrier classification	E15 (min)		EN45545-3 horizontal and vertical
Fire performance	non flame-propagating		IEC EN 61386-1
Flame class	V0		UL 94
Fire hazard level	HL3		EN 45545-2 (R22)
Oxygen index	> 32 %		EN ISO 4589-2
Smoke density	< 150 Ds max.		EN ISO 5659-2 (25 kW/m <sup>2</sup> )
Toxicity	< 0.75 CIT <sub>NLP</sub>		NF X 70-100-1/-2: (600°C)
Fire hazard level	HL3		EN 45545-2 (R23)
Oxygen index	> 32 %		EN ISO 4589-2
Smoke density	< 300 Ds max.		EN ISO 5659-2 (25 kW/m <sup>2</sup> )
Toxicity	< 1.5 CIT <sub>NLP</sub>		NF X 70-100-1/-2: (600°C)
Fire performance NFPA 130:			NFPA 130
- Flammability	compliant		ASTM E 162
- Smoke density	compliant		ASTM E 662
Heat and visible smoke	26.00 MJ/kg		ASTM E 1354
Smoke emission toxicity	compliant		Bombardier SMP 800-C
Smoke emission toxicity	compliant		Boeing BSS 7239

Note: Fire safety properties only applicable for PMA raw material

#### Content of delivery:

- Fitting with conduit locking clip (OVN2)
- Conduit gasket (NVN3)
- Pflitsch double thread element with pre-installed O-ring (OR)
- Pflitsch sealing insert

#### Assembly instructions:

- Please consider the appropriate assembly instructions on [www.pma.ch](http://www.pma.ch)

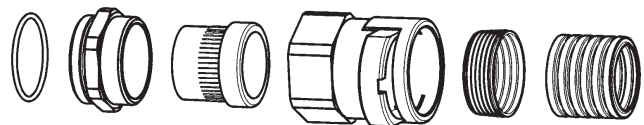


ABB Switzerland Ltd,  
PMA Cable Protection  
Aathalstrasse 90  
8610 Uster, Switzerland  
Phone: +41 58 585 00 11  
pma-info@ch.abb.com  
www.pma.ch

Let's write the future.  
Together. **abb.com**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB Installation Products Inc. does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB Inc. Copyright© 2019 ABB Installation Products Inc. All rights reserved

