
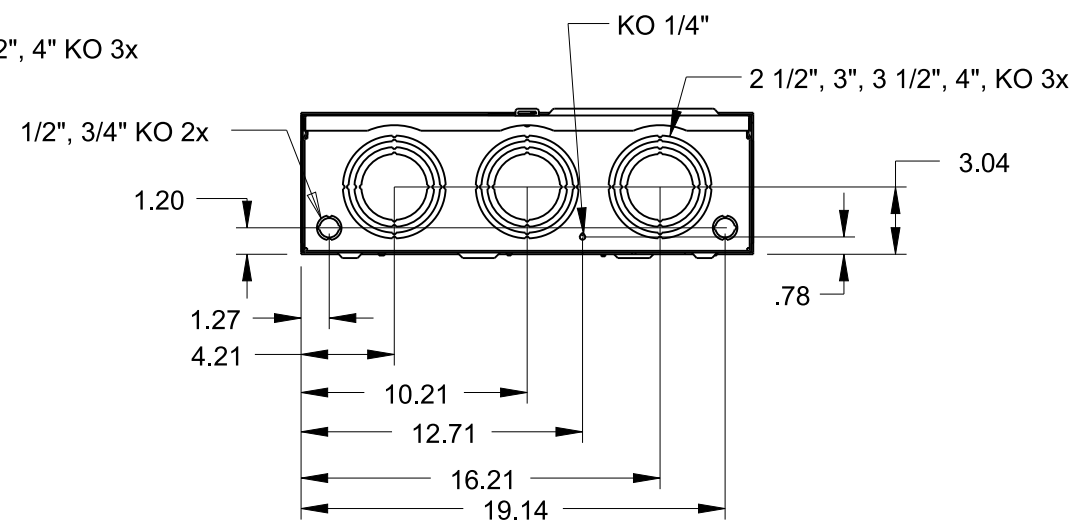
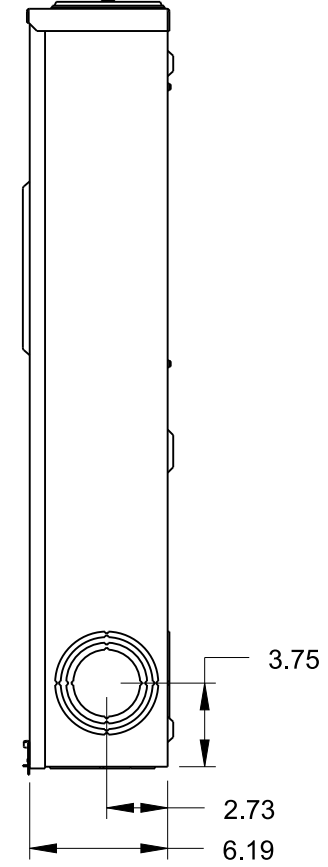
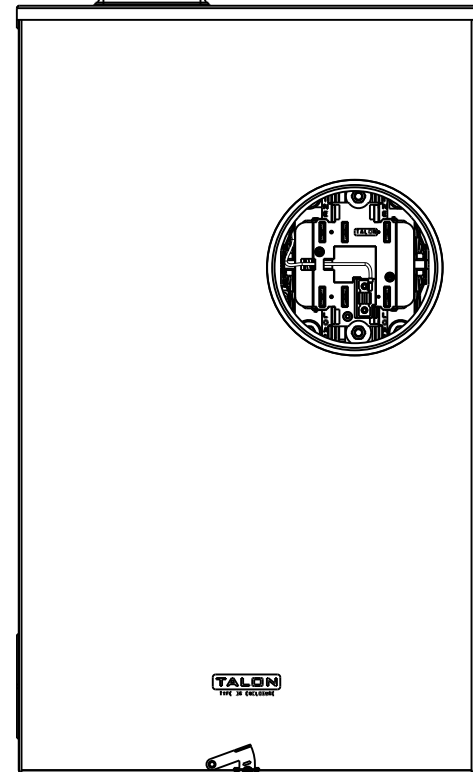
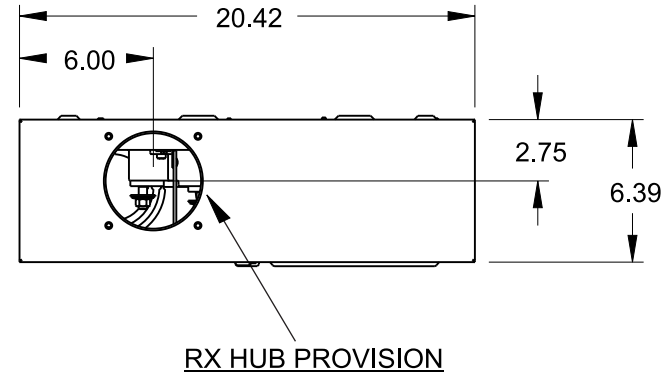


Catalog Number: 47407-02FL

Features and Ratings

- Ringless Type Meter Socket
- 320A Continuous, 400A Max.
- Outdoor Enclosure (NEMA Type 3R)
- Painted G90 Steel
- 3 Phase, 4 Wire, 600V AC
- 7 Jaw
- HQ Clamp Jaw Lever Bypass Meter Socket
- For Underground Service Only
- HD Hub Opening With Coverplate Installed
- Stainless Steel Latch and Hasp
- One ground Lug

Torque 250 Lb-Ins

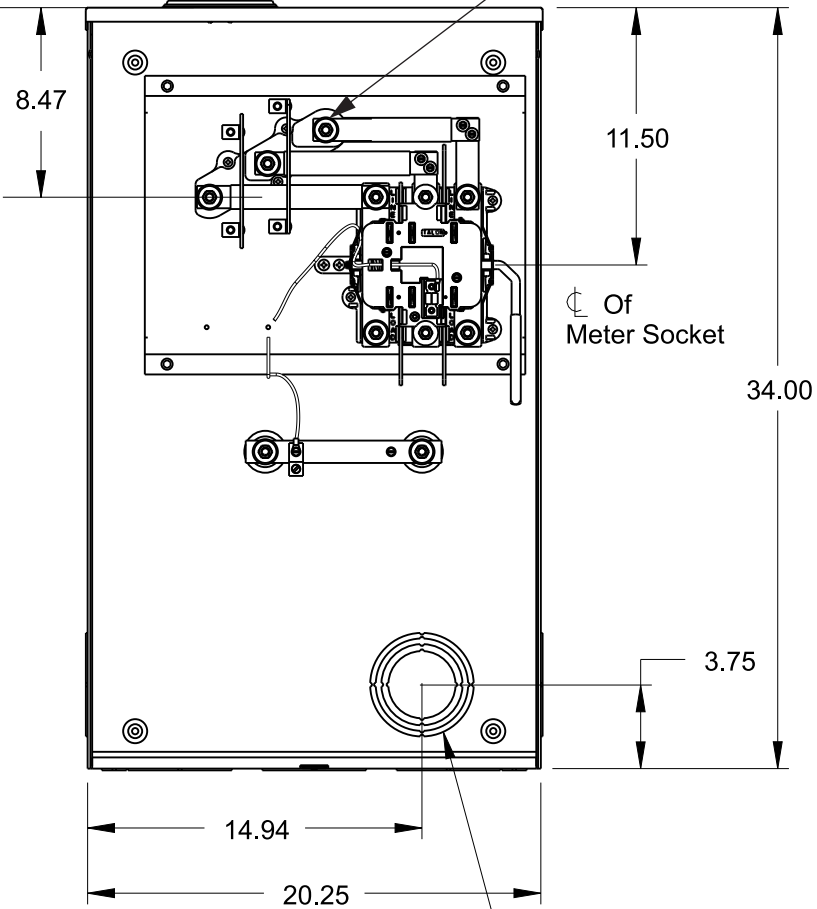


Accessories

- Meter Opening Cover Plate
Cat No: H39968
- HD HUB KITS
Cat No: H56856-2 (3.00")
Cat No: H56857-2 (3.50")
Cat No: H56858-2 (4.00")
- HD HUB KITS
Cat No: EC56856 (3.00")
Cat No: EC56857 (3.50")
Cat No: EC56858 (4.00")
- HUB COVER PLATE
Cat No: H56933-1

Lugs, Wire Sizes and Torques

LOCATION	PART NO.	HEX DRIVE SIZE	LUG SIZE	TORQUE
LINE	56732-2	9/16	#4-350 kcmil	275 LB-IN
LOAD	56732-2	9/16	#4-350 kcmil	275 LB-IN
NEUTRAL	56732-2	9/16	#4-350 kcmil	275 LB-IN
GROUND	67554A	7/16	#14-2/0	50 LB-IN

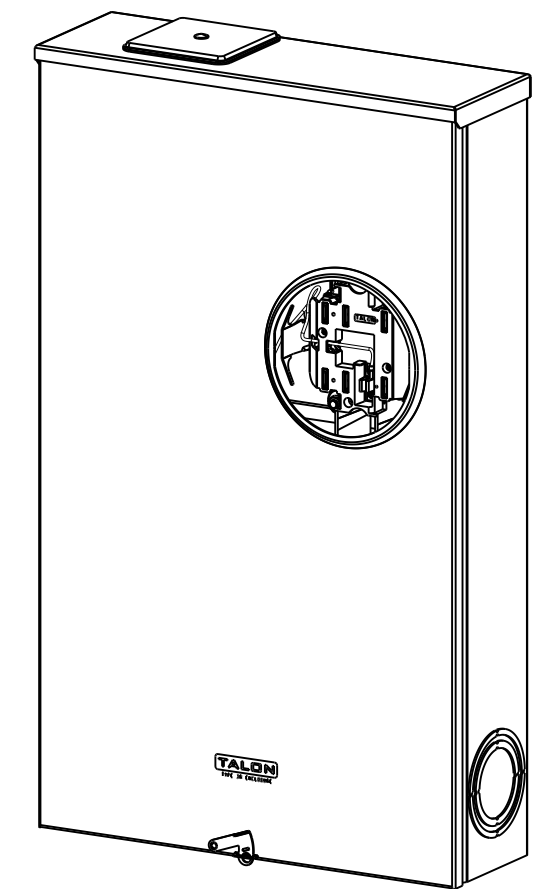

TALON
Meter Socket

Description:
320A Cont, 7 Jaw, HQ7SSW, 600VAC, Painted G90 Steel