




SPADE TONGUE *Non-insulated*

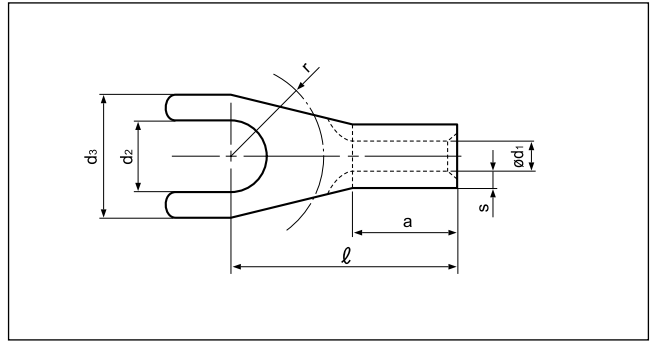

| Applicable Wire mm ² | Stud Size Metric | Part No. | Nominal Size | Dimensions mm (in.) | | | | | | | Tool No. | Qty/box |
|------------------------------------|---------------------|-------------|-----------------|---------------------|-----------------|-------------|-------------|---------------|-----------------|---------------|------------|---------|
| | | | | ød ₂ | ød ₃ | r | ℓ | a | ød ₁ | s | | |
| 0.5 to 1 | 3 | GS3-1C | | 3.2 (.126) | 6.0 (.236) | 4.5 (.177) | 11.0 (.433) | 5.0 (.197) | 1.6 (.063) | 0.8 (.031) | WC-0510DIN | 2,000 |
| | 3 | GS3L-1C | | 3.2 (.126) | 6.5 (.256) | 3.5 (.138) | 8.0 (.315) | 4.0 (.157) | | | | |
| | 3.5 | GS3.5-1C | | 3.7 (.146) | 6.0 (.236) | 4.5 (.177) | 11.0 (.433) | 5.0 (.197) | | | | |
| | 3.5 | GS3.5L-1C | | 3.7 (.146) | 6.5 (.256) | 3.5 (.138) | 8.0 (.315) | 4.0 (.157) | | | | |
| | 4 | GS4M-1C | | 4.3 (.169) | 6.8 (.268) | 5.5 (.217) | 11.0 (.433) | 5.0 (.197) | | | | |
| | 4 | GS4-1C | | 4.3 (.169) | 8.0 (.315) | 6.0 (.236) | 12.0 (.472) | 5.0 (.197) | | | | |
| | 5 | GS5-1C | | 5.3 (.209) | 10.0 (.394) | 6.5 (.256) | 13.0 (.512) | 5.0 (.197) | | | | |
| | 6 | GS6-1C | | 6.5 (.256) | 12.0 (.472) | 10.0 (.394) | 17.0 (.669) | 5.0 (.197) | | | | |
| | 8 | GS8-1C | | 8.4 (.331) | 12.0 (.472) | 10.0 (.394) | 17.0 (.669) | 5.0 (.197) | 1,000 | | | |
| >1 to 2.5 | 3 | GS3-2.5C | | 3.2 (.126) | 6.0 (.236) | 4.5 (.177) | 11.0 (.433) | 5.0 (.197) | 2.3 (.091) | 0.8 (.031) | WC-0510DIN | 2,000 |
| | 3.5 | GS3.5L-2.5C | | 3.7 (.146) | 6.8 (.268) | 4.5 (.177) | 11.0 (.433) | | | | | |
| | 4 | GS4S-2.5C | | 4.3 (.169) | 6.8 (.268) | 4.5 (.177) | 11.0 (.433) | | | | | |
| | 4 | GS4-2.5C | | 4.3 (.169) | 8.0 (.315) | 6.0 (.236) | 12.0 (.472) | | | | | |
| | 5 | GS5-2.5C | | 5.3 (.209) | 10.0 (.394) | 6.5 (.256) | 14.0 (.551) | | | | | |
| | 6 | GS6-2.5C | | 6.5 (.256) | 11.0 (.433) | 7.5 (.295) | 16.0 (.630) | | | | | |
| >2.5 to 6 | 4 | GS4-6C | | 4.3 (.169) | 8.0 (.315) | 6.0 (.236) | 14.0 (.551) | 6.0 (.236) | 3.6 (.142) | 1.0 (.039) | WC-0510DIN | 1,000 |
| | 5 | GS5-6C | | 5.3 (.209) | 10.0 (.394) | 6.5 (.256) | 15.0 (.591) | | | | | 500 |
| | 8 | GS8-6C | | 8.4 (.331) | 14.0 (.551) | 10.0 (.394) | 19.0 (.748) | | | | | |
| >6 to 10 | 4 | GS4-10C | | 4.3 (.169) | 10.0 (.394) | 6.5 (.256) | 16.0 (.630) | 8.0 (.315) | 4.5 (.177) | 1.1 (.043) | WC-0510DIN | 500 |
| | 5 | GS5-10C | | 5.3 (.209) | 10.0 (.394) | 6.5 (.256) | 16.0 (.630) | | | | | |
| | 6 | GS6-10C | | 6.5 (.256) | 11.0 (.433) | 7.5 (.295) | 17.0 (.669) | | | | | |

Note:1) Contact J.S.T.(U.K.) Ltd for the above tools.

2) Delivery lead times may vary depending on the product. Contact JST for details.