

Panel Thickness	Number		
E dim.	of		
inches (mm)	Gasket 4		
1/16 (1.6)			
1/8 (3.2)	3		
3/16 (4.8)	2		
1/4 (6.4)	1		



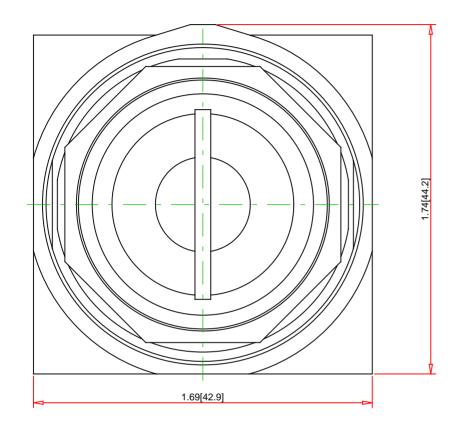

Note: - Drawings Not To Scale - Drawings Subject to Change Without Noti - Dimensions are inches next to [Millimeters		Ξ38		Schneid Beect
UL File:E78403 CCNCSA File:LR24590 ClaCE Marked:YesRoHS:YesNEMA / IP Rating:NEMA 1/2/3/Key Number:E38Key Removal:Center OnlyLight Module Supply Voltage:not applicablLight Module Type:not applicablNumber of Operators:1	ss 3211-03 R/4/6/12/13 Water tight, Dust tight and Oil tight (Indoor/Outdoor), IP66	Description: Ring Nut Material: Operator Type: Operator Action: Button Type: Guard Type: Button/Cap Color: Lens Type: Lens Color: Knob Type: Knob Color: Number of Positions:	30mm Selector Swir Chromium Plated Z Non-Illuminated Maintained n/a n/a not applicable not applicable Key Operated Knob Key 3	ïnc

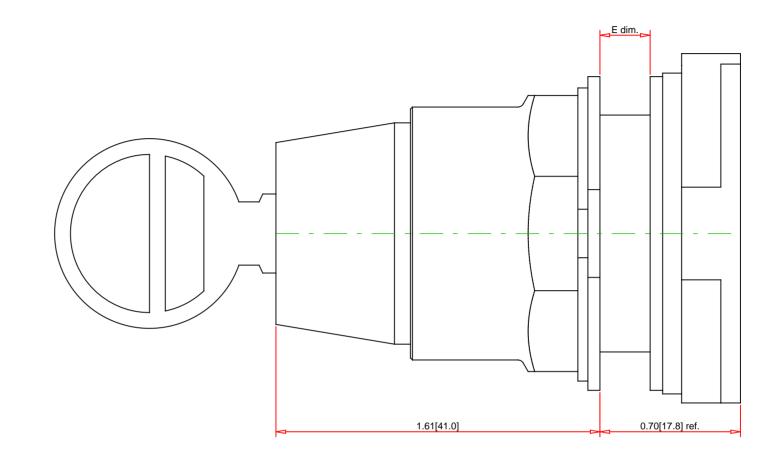

Schneider Electric United States North American Division Boston One Campus 800 Federal Street Andover, MA 01810, USA Phone:+1 8773425173 Email: CCC@us.schneider-electric.com