


Note:  
 - Drawings Not To Scale  
 - Drawings Subject to Change Without Notice  
 - Dimensions are inches next to [Millimeters]

Part No.:

**RM35JA32MT**

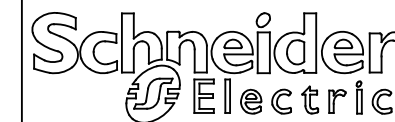

Schneider Electric United States  
 North American Division  
 Boston One Campus  
 800 Federal Street  
 Andover, MA 01810, USA  
 Phone: +1 8773425173  
 Email: CCC@us.schneider-electric.com

Technical Information:

Max. Switching Current: 8A  
 Max. Switching Voltage: 250 V  
 Max. Power Consumption: 8 VA (AC)  
 Type of Output: Relay  
 Output Configuration: DPDT  
 Function(s): Over Current, Under Current  
 Time Delay: Off-Delay: 0.1 to 30s  
 Measurement Range: 0.15-15 A  
 Sensitivity Threshold: N/A

Specification:

Description: Current Monitoring Relay, 380-415 VAC Input, 8A DPDT Output, 0.15-15 A Measurement Range, Function: Over Current And Under Current  
 Dial Settings: Memory Yes / Memory No: <l, >l, >l>, l%: 10 to 100%, Hys / >l>: 5 to 50%, Tt: 0.1 to 30s  
 Indication LED: R  
 Max. Operating Temp.: -20 to +50 °C (-4 to +122 °F)  
 Max. Storage Temp.: -40 to +70 °C (-40 to +158 °F)  
 Degree of Protection Term. Block: IP20  
 Degree of Protection Housing: IP40  
 Electrical Life @ Rated Load: 100,000 cycles  
 Mechanical Life @ Rated Load: 10,000,000 cycles  
 Mounting: 35 mm DIN Rail

Over Current And Under Current