

# Compact Type High Purity Air Operated Chemical Liquid Valve


## LVD Series

Clean Wet Series

RoHS

### Space saving, compact model available

Compact type model is introduced as a new series to complement current LVC series with integrated fittings. Select a series according to the flow rate and installation requirements. Mounting base dimensions conform to SEMI Standard, F65-1101. (Except for the LVD10 and LVD60)

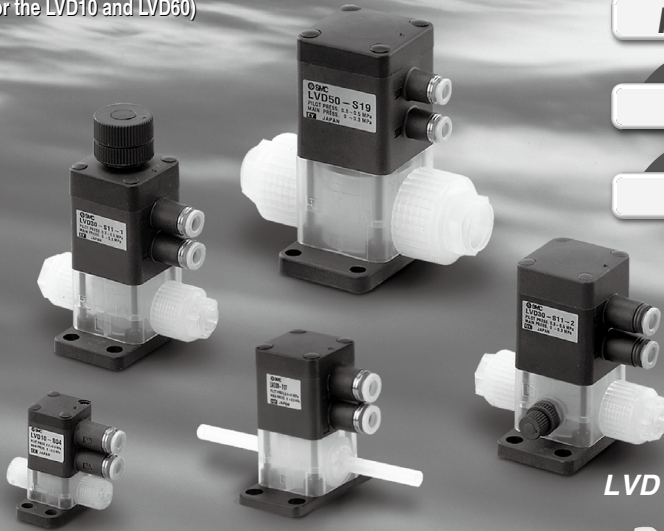


- Body  
**New PFA**
- Diaphragm  
**PTFE**
- Actuator section  
**PPS**

LVD Series Page 740

Material of actuator section: PVDF resin

- Body  
**New PFA**
- Diaphragm  
**PTFE**
- Actuator section  
**PVDF**

Choice of buffer materials  
FKM, EPDM

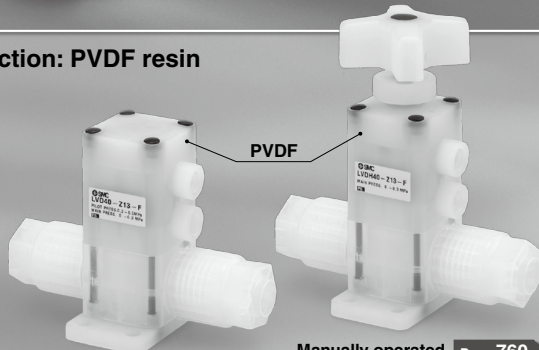

Air operated Page 750

Manually operated Page 760

LVD-F/FN Series

|      |
|------|
| LVC  |
| LVA  |
| LVH  |
| LVD  |
| LVQ  |
| LVP  |
| LVW  |
| LQ1  |
| LQ3  |
| LVN  |
| LQHB |
| TL   |
| TIL  |
| TLM  |
| TILM |
| TD   |
| TID  |
| TH   |
| TIH  |



Air Operated

**LVD-F<sub>FN</sub> Series** Page 750

Manually Operated

**LVDH-F<sub>FN</sub> Series** Page 760

Body: PFA

Actuator section: PVDF

Buffer: FKM/EPDM (Selection)

Type of fitting: Either "LQ1", "LQ3" or "tube extensions" can be selected.

Japan's Export Trade Control Order  
Not applicable for list control

\* Only the LVD50 and 60 apply to the list control.

Pilot port can be selected from 4 directions.

\* Inapplicable to the LVD60.

Options: With flow rate adjustment, With bypass, With indicator, High back pressure (0.5 MPa)



LVD40-Z13-F1  
With flow rate adjustment




LVD40-Z13-F




LVDH40-Z13-F

**Variations**


[LQ1 integrated fittings]... Pages 750, 760

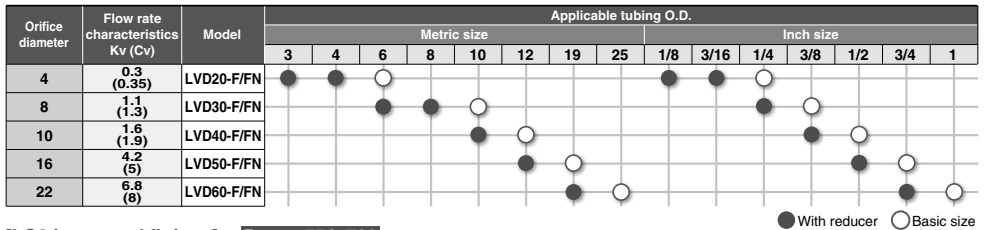

[LQ3 integrated fittings]... Pages 754, 762

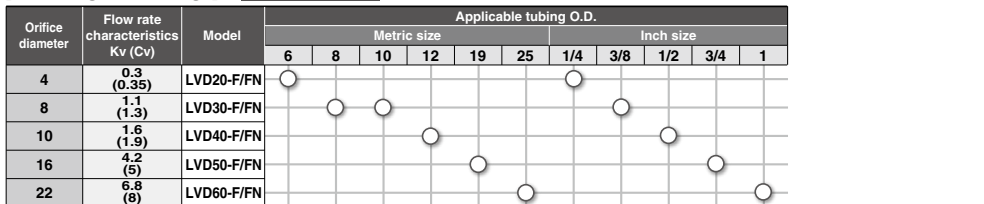

[Tube extensions]... Pages 757, 764

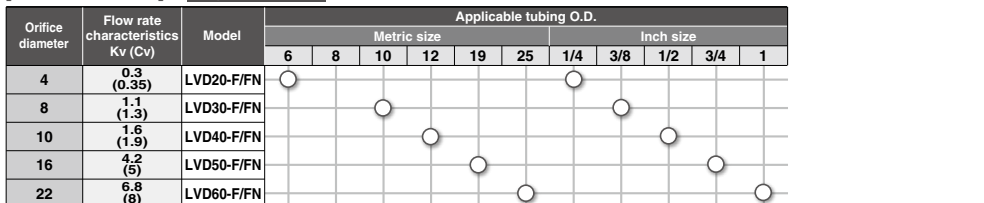

LVC

LVA

LVH

LVD

LVQ

LVP

LVW

LQ1

LQ3

LVN

LQHB

TL

TIL

TLM

TILM

TD

TID

TH

TIH

# Air Operated Insert Bushing, Integrated Fittings LVD Series

RoHS

## How to Order

LVD 1 0 - S 03

### Body class

| Symbol | Body class | Orifice dia. |
|--------|------------|--------------|
| 1      | 1          | ø2           |
| 2      | 2          | ø4           |
| 3      | 3          | ø8           |
| 4      | 4          | ø10          |
| 5      | 5          | ø16          |

### Valve type

|   |               |
|---|---------------|
| 0 | N.C.          |
| 1 | N.O.          |
| 2 | Double acting |

Note) Refer to "Variations" in the table below for valve type combinations.

### Option

|     |                                    |
|-----|------------------------------------|
| Nil | None                               |
| 1   | With flow rate adjustment          |
| 2   | With bypass                        |
| 3   | With flow rate adjustment & bypass |

Note) Refer to "Variations" in the table below for option combinations. Options can not be combined each other.

### Material

| Symbol | Body | Actuator section End plate | Diaphragm | Note                          |
|--------|------|----------------------------|-----------|-------------------------------|
| Nil    | PFA  | PPS                        | PTFE      | —                             |
| N      | PFA  | PPS                        | PTFE      | Ammonium hydroxide compatible |

### LQ1 integrated fittings

### Applicable tubing size

| Symbol             | Connecting tubing size | Body class |   |   |   |   |
|--------------------|------------------------|------------|---|---|---|---|
|                    |                        | 1          | 2 | 3 | 4 | 5 |
| <b>Metric size</b> |                        |            |   |   |   |   |
| 03                 | 3 x 2                  | ○          | ● |   |   |   |
| 04                 | 4 x 3                  | ○          | ● |   |   |   |
| 06                 | 6 x 4                  |            | ○ | ● |   |   |
| 08                 | 8 x 6                  |            |   | ○ | ● |   |
| 10                 | 10 x 8                 |            |   |   | ○ | ● |
| 12                 | 12 x 10                |            |   |   |   | ○ |
| 19                 | 19 x 16                |            |   |   |   | ○ |
| <b>Inch size</b>   |                        |            |   |   |   |   |
| 03                 | 1/8" x 0.086"          | ○          | ● |   |   |   |
| 05                 | 3/16" x 1/8"           |            | ○ | ● |   |   |
| 07                 | 1/4" x 5/32"           |            |   | ○ | ● |   |
| 11                 | 3/8" x 1/4"            |            |   |   | ○ | ● |
| 13                 | 1/2" x 3/8"            |            |   |   |   | ○ |
| 19                 | 3/4" x 5/8"            |            |   |   |   | ○ |

○ Basic size ● With reducer


Note) Refer to page 769 for details on the applicable tubing sizes.

### Pilot port type

| Symbol | Body class    | Type                 |
|--------|---------------|----------------------|
| Nil    | 1             | ø4 One-touch fitting |
|        | 2, 3, 4, 5    | ø6 One-touch fitting |
| 2      | 1, 2, 3, 4, 5 | M5 x 0.8             |

### Pilot port position

| Symbol | Position |
|--------|----------|
| Nil    | ①        |
| P2     | ②        |
| P3     | ③        |
| P4     | ④        |



### Port B (OUT) different diameter size

| Symbol | Application  |
|--------|--|
| Nil    | Ports A & B same size  |
|        | Different diameter tubings can be selected within the same body class. |
|        | Different diameter tubing can not be selected for the body size 1.     |

## Variations

| Type                               | Symbol | Model         | Orifice diameter |                |          |          |          |
|------------------------------------|--------|---------------|------------------|----------------|----------|----------|----------|
|                                    |        |               | Tubing O.D.      |                |          |          |          |
|                                    |        |               | LVD10            | LVD20          | LVD30    | LVD40    | LVD50    |
|                                    |        |               | ø2               | ø4             | ø8       | ø10      | ø16      |
|                                    |        |               | Metric           |                |          |          |          |
|                                    |        |               | 3, 4             | 3, 4, 6        | 6, 8, 10 | 10, 12   | 12, 19   |
|                                    |        |               | Inch             |                |          |          |          |
|                                    |        |               | 1/8              | 1/8, 3/16, 1/4 | 1/4, 3/8 | 3/8, 1/2 | 1/2, 3/4 |
| Basic                              |        | N.C.          | ○                | ○              | ○        | ○        | ○        |
|                                    |        | N.O.          | ○                | ○              | ○        | ○        | ○        |
|                                    |        | Double acting | ○                | ○              | ○        | ○        | ○        |
| With flow rate adjustment          |        | N.C.          | ○                | ○              | ○        | ○        | ○        |
|                                    |        | Double acting | ○                | ○              | ○        | ○        | ○        |
|                                    |        | Double acting | ○                | ○              | ○        | ○        | ○        |
| With bypass                        |        | N.C.          | —                | ○              | ○        | ○        | ○        |
|                                    |        | Double acting | —                | ○              | ○        | ○        | ○        |
|                                    |        | Double acting | —                | ○              | ○        | ○        | ○        |
| With flow rate adjustment & bypass |        | N.C.          | —                | ○              | ○        | ○        | ○        |
|                                    |        | Double acting | —                | ○              | ○        | ○        | ○        |
|                                    |        | Double acting | —                | ○              | ○        | ○        | ○        |

### Standard Specifications



| Model                     |                   | LVD10                   | LVD20          | LVD30          | LVD40       | LVD50    |
|---------------------------|-------------------|-------------------------|----------------|----------------|-------------|----------|
| Tubing O.D. (Note)        | Metric            | 3, 4                    | 3, 4, 6        | 6, 8, 10       | 10, 12      | 12, 19   |
|                           | Inch              | 1/8                     | 1/8, 3/16, 1/4 | 1/4, 3/8       | 3/8, 1/2    | 1/2, 3/4 |
| Orifice diameter          |                   | ø2                      | ø4             | ø8             | ø10         | ø16      |
| Flow rate characteristics | Kv                | 0.07                    | 0.3            | 1.1            | 1.6         | 4.2      |
|                           | Cv                | 0.09                    | 0.35           | 1.3            | 1.9         | 5        |
| Withstand pressure [MPa]  |                   | 1                       |                |                |             |          |
| Operating pressure [MPa]  | A→B flow          | 0 to 0.5                |                | 0 to 0.3       |             |          |
|                           | B→A flow          | 0 to 0.2                |                | 0 to 0.1       |             |          |
| Back pressure [MPa]       |                   | 0.3 or less             |                |                | 0.2 or less |          |
| Valve leakage [cm³/min]   |                   | 0 (With water pressure) |                |                |             |          |
| Pilot air pressure [MPa]  |                   | 0.3 to 0.5              |                |                |             |          |
| Pilot port size           | One-touch fitting | ø4 x ø3 tubing          |                | ø6 x ø4 tubing |             |          |
|                           | Threaded          | M5 x 0.8                |                |                |             |          |
| Fluid temperature [°C]    |                   | 0 to 100                |                |                |             |          |
| Ambient temperature [°C]  |                   | 0 to 60                 |                |                |             |          |
| Weight [kg]               |                   | 0.04                    | 0.09           | 0.16           | 0.19        | 0.40     |

Note) Refer to page 769 for details of the applicable tubing sizes.

### Different Diameter Tubing Applicable with Reducer

Different diameter tubing can be selected (within a body class) by using a nut and insert bushing (reducer). Different diameter tubing cannot be selected for the body size 1.

● With reducer

| Body class | Tubing O.D. |   |   |   |    |    |           |     |      |     |     |     |     |
|------------|-------------|---|---|---|----|----|-----------|-----|------|-----|-----|-----|-----|
|            | Metric size |   |   |   |    |    | Inch size |     |      |     |     |     |     |
|            | 3           | 4 | 6 | 8 | 10 | 12 | 19        | 1/8 | 3/16 | 1/4 | 3/8 | 1/2 | 3/4 |
| 1          | ○           | ○ | — | — | —  | —  | —         | ○   | —    | —   | —   | —   | —   |
| 2          | ●           | ● | ○ | — | —  | —  | —         | ●   | ○    | —   | —   | —   | —   |
| 3          | —           | — | ● | ● | ○  | —  | —         | —   | ●    | ○   | —   | —   | —   |
| 4          | —           | — | — | — | ●  | ○  | —         | —   | —    | ●   | ○   | —   | —   |
| 5          | —           | — | — | — | —  | ●  | ○         | —   | —    | —   | —   | ●   | ○   |

Note) Refer to page 766 for information on changing tubing sizes.

### ⚠ Precautions

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions, and pages 768 and 769 for Compact Type High Purity Air Operated Chemical Liquid Valve Precautions.

LVC

LVA

L VH

LVD

L VQ

LVP

L VW

LQ1

LQ3

LVN

LQHB

TL

TIL

TLM

TILM

TD

TID

TH

TIH

# LVD Series

## Suck Back

A change of volume inside the suck back valve pulls in liquid at the end of the nozzle to prevent dripping.

### Pilot port with One-touch fittings


**Adjustment knob**  
Adjusts the flow rate.

**Adjustment knob**  
Adjusts the amount of suck back.

**Lock nut**  
Locks the adjustment knob position.

**Lock nut**  
Locks the adjustment knob position.

**Symbol**

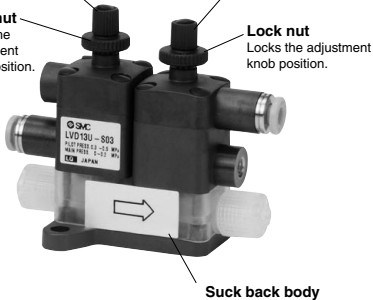

Suck back body

### Pilot port threaded type



## Standard Specifications

| Model                                       |                   | LVD13U         |
|---|-------------------|----------------|
| Tubing O.D. <small>(Note)</small>           | Metric size       | 3, 4           |
|   | Inch size         | 1/8            |
| Orifice diameter                            |                   | ø2             |
| Flow rate characteristics                   | Kv                | 0.07           |
|   | Cv                | 0.09           |
| Withstand pressure [MPa]                    |                   | 1              |
| Operating pressure [MPa]                    |                   | 0 to 0.2       |
| Maximum suck back volume [cm <sup>3</sup> ] |                   | 0.03           |
| Pilot air pressure [MPa]                    |                   | 0.3 to 0.5     |
| Pilot port size                             | One-touch fitting | ø4 x ø3 tubing |
|   | Threaded          | M5 x 0.8       |
| Fluid temperature [°C]                      |                   | 0 to 100       |
| Ambient temperature [°C]                    |                   | 0 to 60        |
| Weight [kg]                                 |                   | 0.07           |

(Note) Refer to page 769 for details on the applicable tubing sizes.

## How to Order

**LVD 1 3 U - S 03**

**Body class**

| Symbol | Body class |
|--------|------------|
| 1      | 1          |

**Valve type**

|   |                 |
|---|-----------------|
| 3 | Suck back valve |
|---|-----------------|

**Applicable tubing size (Note)**

| Symbol | Connecting tubing size |
|--------|------------------------|
| 03     | 3 x 2, 1/8" x 0.086"   |
| 04     | 4 x 3                  |



(Note) Refer to page 769 for details on the applicable tubing sizes.

**Pilot port configuration**

|     |                      |
|-----|----------------------|
| Nil | ø4 One-touch fitting |
| 2   | M5 x 0.8             |


## Construction

### Basic type

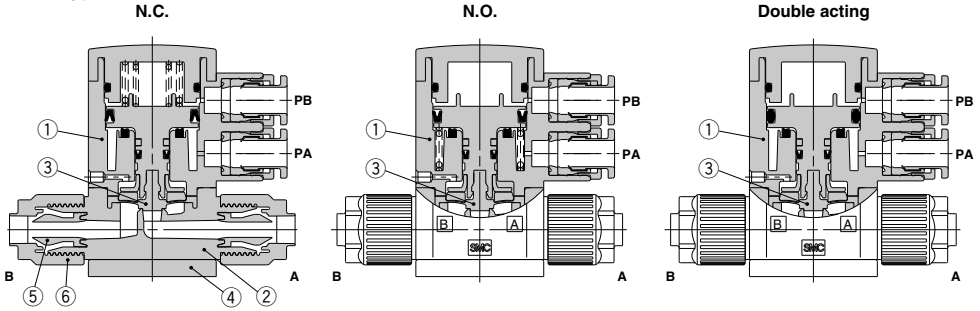


With reducer

### With flow rate adjustment



### With bypass



|            |
|------------|
| LVC        |
| LVA        |
| LVH        |
| <b>LVD</b> |
| LVQ        |
| LVP        |
| LVW        |
| LQ1        |
| LQ3        |
| LVN        |
| LQHB       |
| TL         |
| TIL        |
| TLM        |
| TILM       |
| TD         |
| TID        |
| TH         |
| TIH        |




### Component Parts

| No. | Description                | Material |
|-----|----------------------------|----------|
| 1   | Actuator section           | PPS      |
| 2   | Body                       | PFA      |
| 3   | Diaphragm                  | PTFE     |
| 4   | End plate                  | PPS      |
| 5   | Insert bushing             | PFA      |
| 6   | Nut                        | PFA      |
| 7   | Collar                     | PFA      |
| 8   | Flow rate adjuster section | PPS      |

# LVD Series

## Dimensions

### Basic type

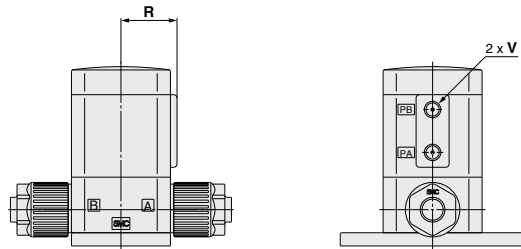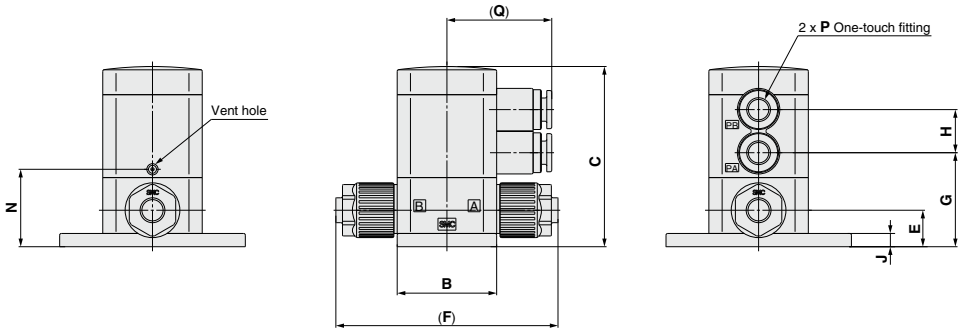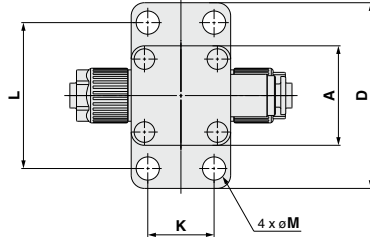

### Pilot port threaded type

### Dimensions


| Model    | A  | B  | C     | D  | E    | F   | G    | H    | J   | K  | L  | M | N    | P             | Q    | R    | V        |
|----------|----|----|-------|----|------|-----|------|------|-----|----|----|---|------|---------------|------|------|----------|
| LVD1□-S□ | 20 | 20 | 45    | 39 | 9.5  | 46  | 23   | 11.5 | 4.5 | 11 | 30 | 5 | 21   | ø4<br>(5/32") | 28   | 22.5 | M5 x 0.8 |
| LVD2□-S□ | 30 | 30 | 54.5  | 56 | 11   | 67  | 28.5 | 13   | 4   | 20 | 44 | 7 | 23.5 | ø6            | 31.5 | 17.5 | M5 x 0.8 |
| LVD3□-S□ | 35 | 35 | 79.5  | 62 | 17.5 | 83  | 42.4 | 17.5 | 6   | 22 | 50 | 7 | 36.8 | ø6            | 36   | 21   | M5 x 0.8 |
| LVD4□-S□ | 35 | 35 | 82    | 62 | 20   | 93  | 44.9 | 17.5 | 6   | 22 | 50 | 7 | 39.3 | ø6            | 36   | 21   | M5 x 0.8 |
| LVD5□-S□ | 45 | 45 | 105.7 | 76 | 25   | 114 | 65.2 | 17.5 | 8   | 32 | 64 | 7 | 52.2 | ø6            | 38.5 | 25   | M5 x 0.8 |



**With flow rate adjustment**

**Dimensions [mm]**


| Model    | S    |
|----------|------|
| LVD1□-S□ | 14   |
| LVD2□-S□ | 12.5 |
| LVD3□-S□ | 26   |
| LVD4□-S□ | 26   |
| LVD5□-S□ | 29.5 |

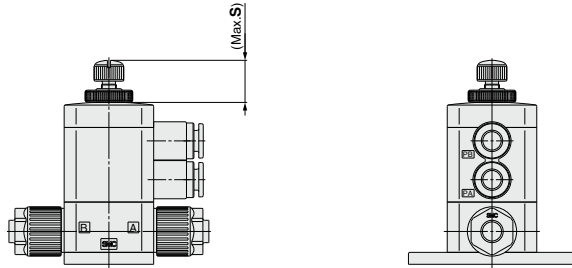

**With bypass**

**Dimensions [mm]**


| Model    | T  | U    |
|----------|----|------|
| LVD2□-S□ | 28 | 9.6  |
| LVD3□-S□ | 34 | 17.5 |
| LVD4□-S□ | 35 | 20   |
| LVD5□-S□ | 57 | 25   |

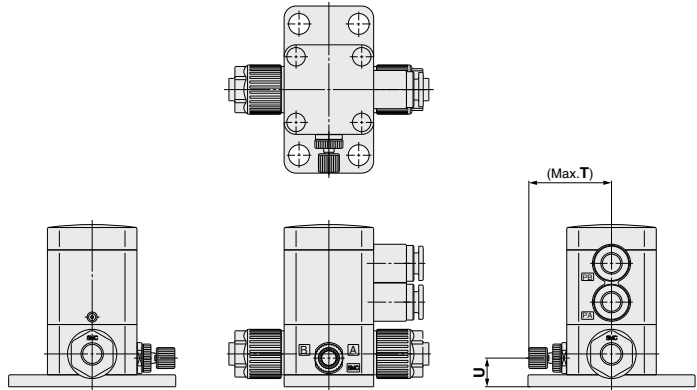

**With flow rate adjustment & bypass**

**Dimensions [mm]**

| Model    | S    | T  | U    |
|----------|------|----|------|
| LVD2□-S□ | 12.5 | 28 | 9.6  |
| LVD3□-S□ | 26   | 34 | 17.5 |
| LVD4□-S□ | 26   | 35 | 20   |
| LVD5□-S□ | 29.5 | 57 | 25   |

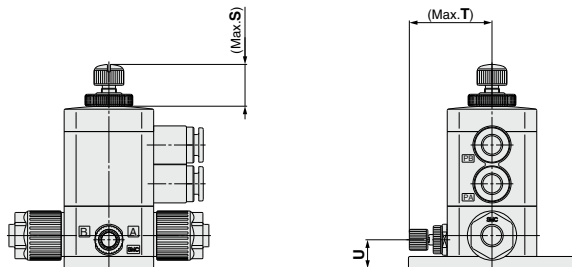


|      |
|------|
| LVC  |
| LVA  |
| LVB  |
| LVD  |
| LVDQ |
| LVP  |
| LWV  |
| LQ1  |
| LQ3  |
| LVN  |
| LQHB |
| TL   |
| TIL  |
| TLM  |
| TILM |
| TD   |
| TID  |
| TH   |
| TIH  |

# LVD Series


## Dimensions

### Suck back valve unit:

#### Pilot port with One-touch fittings

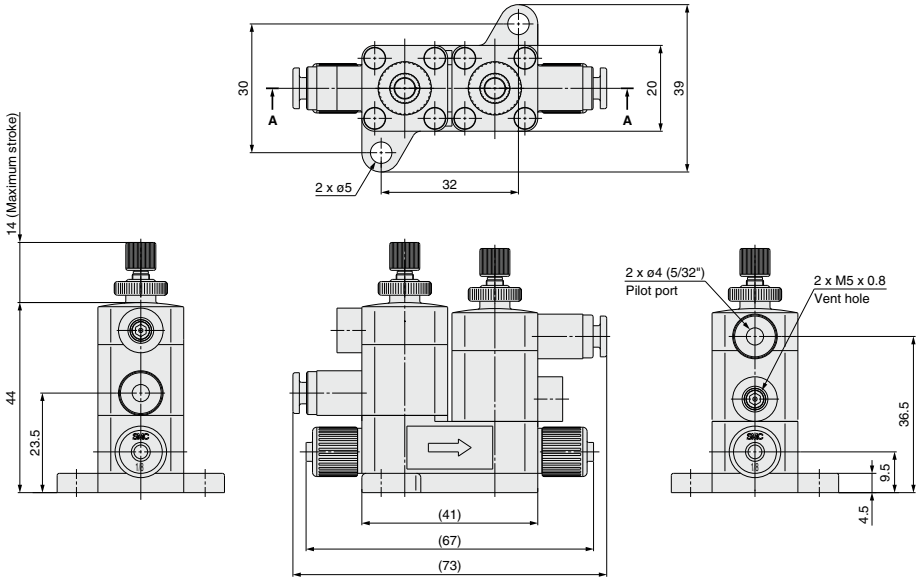

#### Pilot port threaded type

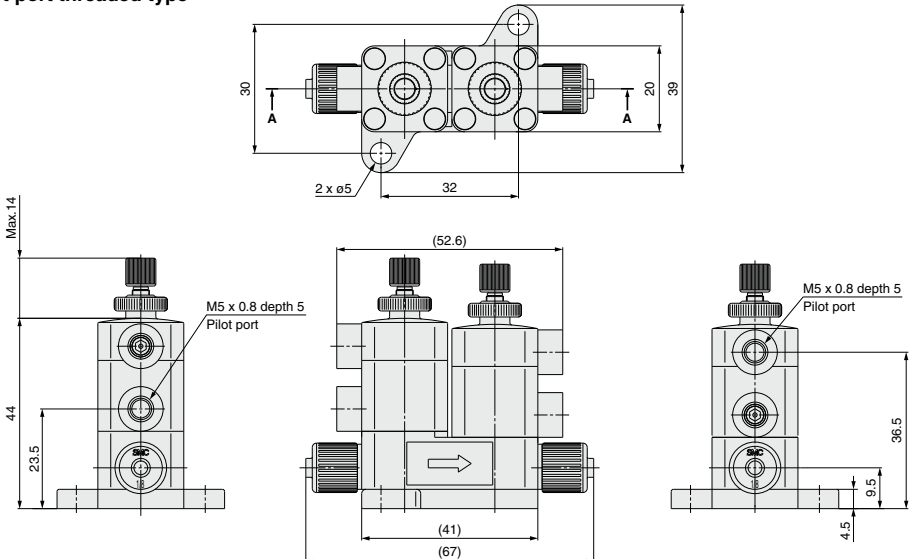

# Air Operated Tube Extensions **LVD-T Series**



## How to Order

LVD **2** **0** - T **06**     -    

### Body class

| Symbol | Body class | Orifice dia. |
|--------|------------|--------------|
| 2      | 2          | ø4           |
| 3      | 3          | ø8           |
| 4      | 4          | ø10          |
| 5      | 5          | ø16          |

### Valve type

|   |               |
|---|---------------|
| 0 | N.C.          |
| 1 | N.O.          |
| 2 | Double acting |

Note) Refer to "Variations" in the table below for valve type combinations.

### Tubing O.D.

| Symbol             | Tubing O.D. | Body class |   |   |   |  |
|--------------------|-------------|------------|---|---|---|--|
|                    |             | 2          | 3 | 4 | 5 |  |
| <b>Metric size</b> |             |            |   |   |   |  |
| 06                 | ø6          | ○          |   |   |   |  |
| 10                 | ø10         |            | ○ |   |   |  |
| 12                 | ø12         |            |   | ○ |   |  |
| 19                 | ø19         |            |   |   | ○ |  |
| <b>Inch size</b>   |             |            |   |   |   |  |
| 07                 | 1/4"        | ○          |   |   |   |  |
| 11                 | 3/8"        |            | ○ |   |   |  |
| 13                 | 1/2"        |            |   | ○ |   |  |
| 19                 | 3/4"        |            |   |   | ○ |  |

### Option

|     |                           |
|-----|---------------------------|
| Nil | None                      |
| 1   | With flow rate adjustment |


Note) Refer to "Variations" in the table below for option combinations.

### Material

| Symbol | Body | Actuator section End plate | Diaphragm | Note                          |
|--------|------|----------------------------|-----------|-------------------------------|
| Nil    | PFA  | PPS                        | PTFE      | —                             |
| N      | PFA  | PPS                        | PTFE      | Ammonium hydroxide compatible |

### Pilot port position

| Symbol | Position |
|--------|----------|
| Nil    | ①        |
| P2     | ②        |
| P3     | ③        |
| P4     | ④        |



### Pilot port type

| Symbol | Type                 |
|--------|----------------------|
| Nil    | ø6 One-touch fitting |
| 2      | M5 x 0.8             |

## Variations

|  | Model         | LVD20-T          |            |             |      | LVD30-T          |            |             |      | LVD40-T          |            |             |      | LVD50-T          |            |             |      |
|--|---------------|------------------|------------|-------------|------|------------------|------------|-------------|------|------------------|------------|-------------|------|------------------|------------|-------------|------|
|  |               | Orifice diameter |            | Tubing O.D. |      | Orifice diameter |            | Tubing O.D. |      | Orifice diameter |            | Tubing O.D. |      | Orifice diameter |            | Tubing O.D. |      |
|  |               | Symbol           | Valve type | Metric      | Inch | Symbol           | Valve type | Metric      | Inch | Symbol           | Valve type | Metric      | Inch | Symbol           | Valve type | Metric      | Inch |
|  | N.C.          | ○                |            | ○           |      | ○                |            | ○           |      | ○                |            | ○           |      | ○                |            | ○           |      |
|  | N.O.          | ○                |            | ○           |      | ○                |            | ○           |      | ○                |            | ○           |      | ○                |            | ○           |      |
|  | Double acting | ○                |            | ○           |      | ○                |            | ○           |      | ○                |            | ○           |      | ○                |            | ○           |      |
|  | N.C.          | ○                |            | ○           |      | ○                |            | ○           |      | ○                |            | ○           |      | ○                |            | ○           |      |
|  | N.C.          | ○                |            | ○           |      | ○                |            | ○           |      | ○                |            | ○           |      | ○                |            | ○           |      |
|  | Double acting | ○                |            | ○           |      | ○                |            | ○           |      | ○                |            | ○           |      | ○                |            | ○           |      |

- LVC
- LVA
- L VH
- LVD
- L VQ
- LVP
- L VW
- LQ1
- LQ3
- LVN
- LQHB
- TL
- TIL
- TLM
- TILM
- TD
- TID
- TH
- TIH

# LVD-T Series



## ⚠ Precautions

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions, and pages 768 and 769 for Compact Type High Purity Air Operated Chemical Liquid Valve Precautions.


## Standard Specifications

| Model                                |                   | LVD20                   | LVD30 | LVD40       | LVD50 |
|--------------------------------------|-------------------|-------------------------|-------|-------------|-------|
| Tubing O.D.                          | Metric            | 6                       | 10    | 12          | 19    |
|                                      | Inch              | 1/4                     | 3/8   | 1/2         | 3/4   |
| Orifice diameter                     |                   | ø4                      | ø8    | ø10         | ø16   |
| Flow rate characteristics            | Kv                | 0.3                     | 1.1   | 1.6         | 4.2   |
|                                      | Cv                | 0.35                    | 1.3   | 1.9         | 5     |
| Withstand pressure [MPa]             |                   | 1                       |       |             |       |
| Operating pressure [MPa]             | A→B flow          | 0 to 0.5                |       | 0 to 0.3    |       |
|                                      | B→A flow          | 0 to 0.2                |       | 0 to 0.1    |       |
| Back pressure [MPa]                  |                   | 0.3 or less             |       | 0.2 or less |       |
| Valve leakage [cm <sup>3</sup> /min] |                   | 0 (With water pressure) |       |             |       |
| Pilot air pressure [MPa]             |                   | 0.3 to 0.5              |       |             |       |
| Pilot port size                      | One-touch fitting | ø6 x ø4 tube            |       |             |       |
|                                      | Threaded          | M5 x 0.8                |       |             |       |
| Fluid temperature [°C]               |                   | 0 to 100                |       |             |       |
| Ambient temperature [°C]             |                   | 0 to 60                 |       |             |       |
| Weight [kg]                          |                   | 0.09                    | 0.15  | 0.17        | 0.36  |


## Construction

### Basic type


N.C.

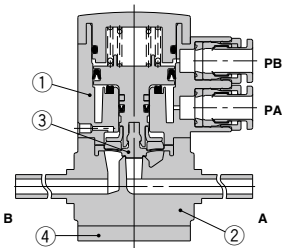


N.O.



Double acting

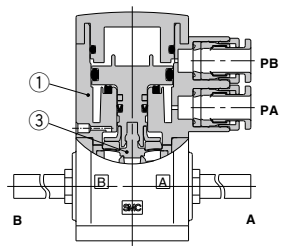

### With flow rate adjustment

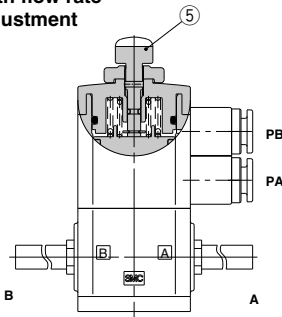


### Component Parts

| No. | Description                | Material |
|-----|----------------------------|----------|
| 1   | Actuator section           | PPS      |
| 2   | Body                       | PFA      |
| 3   | Diaphragm                  | PTFE     |
| 4   | End plate                  | PPS      |
| 5   | Flow rate adjuster section | PPS      |



## Dimensions

### Basic type

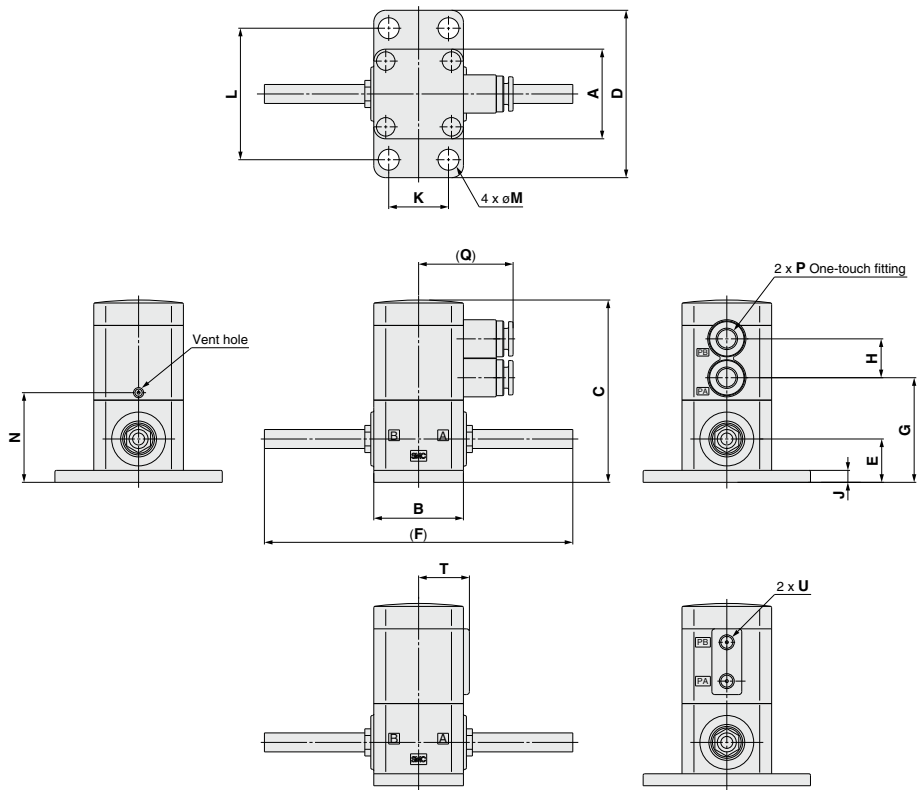

### With flow rate adjustment

### Pilot port threaded type



### Dimensions [mm]

| Model    | S    |
|----------|------|
| LVD2□-T□ | 12.5 |
| LVD3□-T□ | 26   |
| LVD4□-T□ | 26   |
| LVD5□-T□ | 29.5 |

### Dimensions

[mm]

| Model    | A  | B  | C     | D  | E    | F     | G    | H    | J | K  | L  | M | N    | P  | Q    | T    | U        |
|----------|----|----|-------|----|------|-------|------|------|---|----|----|---|------|----|------|------|----------|
| LVD2□-T□ | 30 | 30 | 61    | 56 | 14.5 | 103   | 35   | 13   | 4 | 20 | 44 | 7 | 30   | ø6 | 31.5 | 17.5 | M5 x 0.8 |
| LVD3□-T□ | 35 | 35 | 79.5  | 62 | 17.5 | 136   | 42.4 | 17.5 | 6 | 22 | 50 | 7 | 36.8 | ø6 | 36   | 21   | M5 x 0.8 |
| LVD4□-T□ | 35 | 35 | 82    | 62 | 20   | 137   | 44.9 | 17.5 | 6 | 22 | 50 | 7 | 39.3 | ø6 | 36   | 21   | M5 x 0.8 |
| LVD5□-T□ | 45 | 45 | 105.7 | 76 | 25   | 169.5 | 65   | 17.5 | 8 | 32 | 64 | 7 | 52.2 | ø6 | 38.5 | 25   | M5 x 0.8 |

# Air Operated Insert Bushing, Integrated Fittings **LVD-F/FN Series** RoHS

## How to Order Valves

LVD 2 0 - V 07       - FN    

### Body class

| Symbol | Body class | Orifice dia. |
|--------|------------|--------------|
| 2      | 2          | ø4           |
| 3      | 3          | ø8           |
| 4      | 4          | ø10          |
| 5      | 5          | ø16          |
| 6      | 6          | ø22          |

### Valve type

|   |               |
|---|---------------|
| 0 | N.C.          |
| 1 | N.O.          |
| 2 | Double acting |

### Fitting type

| Symbol | Model |
|--------|-------|
| V      | LQ1   |

### Applicable tubing size

| Symbol             | Connecting tubing size | Body class |   |   |   |   |
|--------------------|------------------------|------------|---|---|---|---|
|                    |                        | 2          | 3 | 4 | 5 | 6 |
| <b>Metric size</b> |                        |            |   |   |   |   |
| 03                 | 3 x 2                  | ●          |   |   |   |   |
| 04                 | 4 x 3                  | ●          |   |   |   |   |
| 06                 | 6 x 4                  | ○          | ● |   |   |   |
| 08                 | 8 x 6                  |            | ● |   |   |   |
| 10                 | 10 x 8                 |            | ○ | ● |   |   |
| 12                 | 12 x 10                |            |   | ○ | ● |   |
| 19                 | 19 x 16                |            |   |   | ○ | ● |
| 25                 | 25 x 22                |            |   |   |   | ○ |
| <b>Inch size</b>   |                        |            |   |   |   |   |
| 03                 | 1/8" x 0.086"          | ●          |   |   |   |   |
| 05                 | 3/16" x 1/8"           | ●          |   |   |   |   |
| 07                 | 1/4" x 5/32"           | ○          | ● |   |   |   |
| 11                 | 3/8" x 1/4"            |            | ○ | ● |   |   |
| 13                 | 1/2" x 3/8"            |            |   | ○ | ● |   |
| 19                 | 3/4" x 5/8"            |            |   |   | ○ | ● |
| 25                 | 1" x 7/8"              |            |   |   |   | ○ |

○ Basic size ● With reducer

### Port B (OUT) different diameter size

| Symbol  | Application  |
|---|--|
| Nil   | Ports A & B same size  |
| Refer to the applicable tubing table shown above. | Different diameter tubings can be selected within the same body class. |

### Option

|     |   |
|-----|---|
| Nil | None  |
| 1   | With flow rate adjustment                             |
| 2   | With bypass   |
| 3   | With flow rate adjustment & bypass                    |
| 4   | With indicator  |
| 5   | High back pressure (0.5 MPa) tolerant                 |
| 6   | High back pressure with flow rate adjustment          |
| 7   | High back pressure with bypass                        |
| 8   | High back pressure with flow rate adjustment & bypass |
| 9   | High back pressure with indicator                     |
| 24  | With bypass & indicator                               |

Note 1) With flow rate adjustment: Only available with N.C. valve and double acting valve, With indicator: Only available with N.C. valve, With bypass: Only available with N.C. valve and double acting valve.

Note 2) "With bypass" type is not available for the LVD2□ and LVD6□.


### Material

| Symbol | Body | Actuator section |           |      |        |
|--------|------|------------------|-----------|------|--------|
|        |      | End plate        | Diaphragm | Seal | Buffer |
| F      | PFA  | PVDF             | PTFE      | FKM  |        |
| FN     | PFA  | PVDF             | PTFE      | EPDM |        |

### Pilot port position

| Symbol | Position |
|--------|----------|
| Nil    | ①        |
| P2     | ②        |
| P3     | ③        |
| P4     | ④        |

Note) P2 and P4 are not available for the LVD6□.



### Pilot port thread type

|     |        |
|-----|--------|
| Nil | Rc1/8  |
| N   | NPT1/8 |

## Standard Specifications

| Model                     |                    | LVD20  | LVD30       | LVD40       | LVD50    | LVD60       |
|---------------------------|--------------------|--|-------------|-------------|----------|-------------|
| Tubing O.D.               | Metric             | 3, 4, 6  | 6, 8, 10    | 10, 12      | 12, 19   | 19, 25      |
|                           | Inch               | 1/8, 3/16, 1/4   | 1/4, 3/8    | 3/8, 1/2    | 1/2, 3/4 | 3/4, 1      |
| Orifice diameter          |                    | ø4   | ø8          | ø10         | ø16      | ø22         |
| Flow rate characteristics | Kv                 | 0.3  | 1.1         | 1.6         | 4.2      | 6.8         |
|                           | Cv                 | 0.35   | 1.3         | 1.9         | 5        | 8           |
| Withstand pressure [MPa]  |                    | 1  |             |             |          |             |
| Operating pressure [MPa]  | Standard           | A→B flow   | 0 to 0.5    |             | 0 to 0.3 | 0 to 0.4    |
|                           |                    | B→A flow   | 0 to 0.2    |             | 0 to 0.1 |             |
|                           | High back pressure | A→B flow   | 0 to 0.5    |             |          |             |
|                           |                    | B→A flow   | 0 to 0.4    |             |          |             |
| Back pressure [MPa]       | Standard           | N.C./N.O.  | 0.3 or less | 0.2 or less |          | 0.2 or less |
|                           |                    | Double acting  |             |             |          | 0.3 or less |
|                           | High back pressure | N.C./N.O./Double acting                                      | 0.5 or less |             |          |             |
|                           |                    | Valve leakage [cm <sup>3</sup> /min] 0 (With water pressure) |             |             |          |             |
| Pilot air pressure [MPa]  |                    | 0.3 to 0.5 (High back pressure: 0.5 to 0.8)                  |             |             |          |             |
| Pilot port size           |                    | Rc1/8, NPT1/8  |             |             |          |             |
| Fluid temperature [°C]    |                    | 0 to 100   |             |             |          |             |
| Ambient temperature [°C]  |                    | 0 to 60  |             |             |          |             |

## ⚠ Precautions

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions, and pages 768 and 769 for Compact Type High Purity Air Operated Chemical Liquid Valve Precautions.

## Different Diameter Tubing Applicable with Reducer

Different diameter tubing can be selected (within a body class) by using a nut and insert bushing (reducer).

● With reducer

| Body class | Tubing O.D. |   |   |   |    |    |    |           |     |      |     |     |     |     |   |
|------------|-------------|---|---|---|----|----|----|-----------|-----|------|-----|-----|-----|-----|---|
|            | Metric size |   |   |   |    |    |    | Inch size |     |      |     |     |     |     |   |
|            | 3           | 4 | 6 | 8 | 10 | 12 | 19 | 25        | 1/8 | 3/16 | 1/4 | 3/8 | 1/2 | 3/4 | 1 |
| 2          | ●           | ● | ○ | — | —  | —  | —  | —         | ●   | ●    | ○   | —   | —   | —   | — |
| 3          | —           | — | ● | ● | ○  | —  | —  | —         | —   | —    | ●   | ○   | —   | —   | — |
| 4          | —           | — | — | — | ●  | ○  | —  | —         | —   | —    | —   | ●   | ○   | —   | — |
| 5          | —           | — | — | — | —  | ●  | ○  | —         | —   | —    | —   | —   | ●   | ○   | — |
| 6          | —           | — | — | — | —  | —  | ●  | ○         | —   | —    | —   | —   | —   | ●   | ○ |

Note) Refer to page 766 for information on changing tubing sizes.

LVC

LVA

LVB

LVD

LVQ

LVP

LVV

LQ1

LQ3

LVN

LQHB

TL

TIL

TLM

TILM

TD

TID


TH

TIH

# LVD-F/FN Series

## Dimensions

Basic type,  
High back pressure

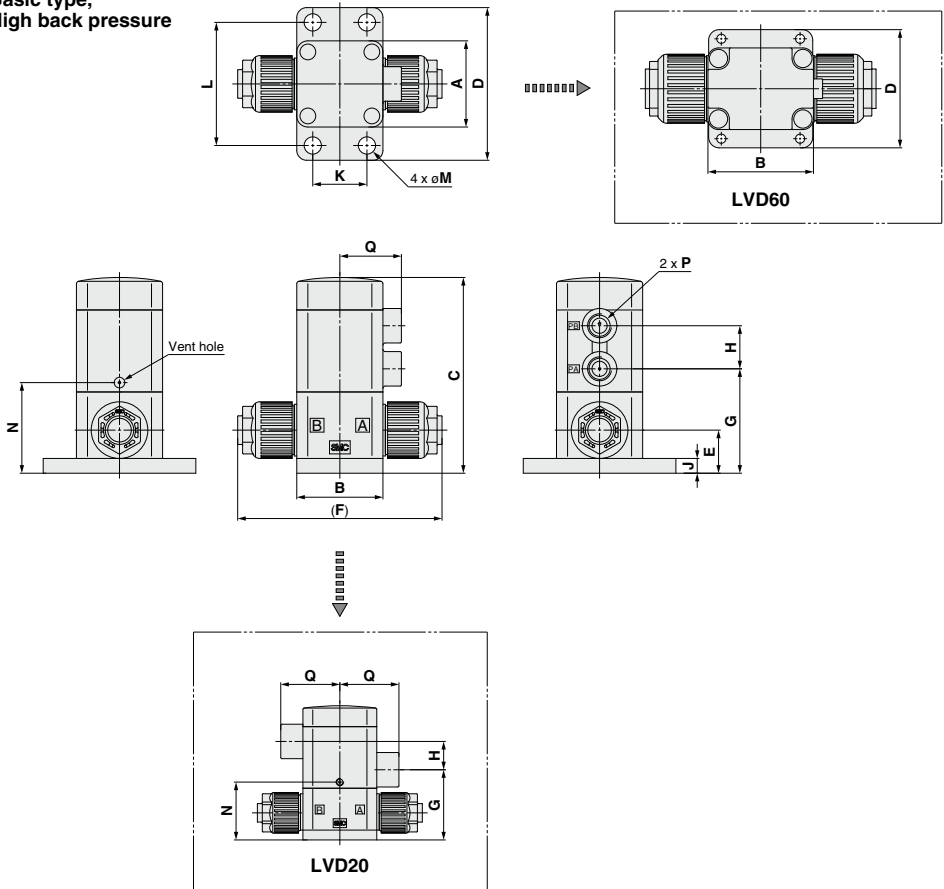

## Dimensions

[mm]


| Model       | A  | B  | C     | D  | E    | F   | G    | H    | J | K  | L  | M   | N    | P               | Q    |
|-------------|----|----|-------|----|------|-----|------|------|---|----|----|-----|------|-----------------|------|
| LVD2□-V□-F□ | 30 | 30 | 54.5  | 56 | 11   | 67  | 28.5 | 11.5 | 4 | 20 | 44 | 7   | 23.5 | Rc1/8<br>NPT1/8 | 24   |
| LVD3□-V□-F□ | 35 | 35 | 79.5  | 62 | 17.5 | 83  | 42.4 | 17.5 | 6 | 22 | 50 | 7   | 36.8 | Rc1/8<br>NPT1/8 | 25   |
| LVD4□-V□-F□ | 35 | 35 | 82    | 62 | 20   | 93  | 44.9 | 17.5 | 6 | 22 | 50 | 7   | 39.3 | Rc1/8<br>NPT1/8 | 25   |
| LVD5□-V□-F□ | 45 | 45 | 105.7 | 76 | 25   | 114 | 65.2 | 17.5 | 8 | 32 | 64 | 7   | 52.2 | Rc1/8<br>NPT1/8 | 27.5 |
| LVD6□-V□-F□ | 58 | 74 | 137.8 | 84 | 32   | 164 | 76.8 | 27.5 | 8 | 56 | 71 | 6.5 | 70.8 | Rc1/8<br>NPT1/8 | 44   |



## Dimensions


With flow rate adjustment, High back pressure with flow rate adjustment

| Dimensions [mm] |      |
|-----------------|------|
| Model           | S    |
| LVD2□-V□-F1     | 18.5 |
| LVD3□-V□-F1     | 28.5 |
| LVD4□-V□-F1     | 28.5 |
| LVD5□-V□-F1     | 30.1 |
| LVD6□-V□-F1     | 38   |

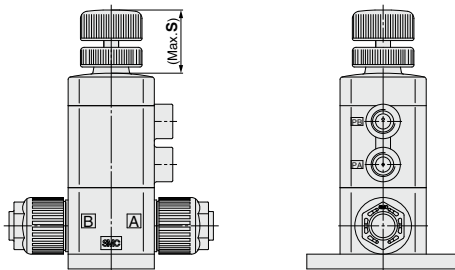


With bypass, High back pressure with bypass

| Dimensions [mm] |      |      |
|-----------------|------|------|
| Model           | T    | U    |
| LVD3□-V□-F2     | 36.9 | 17.5 |
| LVD4□-V□-F2     | 37.9 | 20   |
| LVD5□-V□-F2     | 60.6 | 25   |

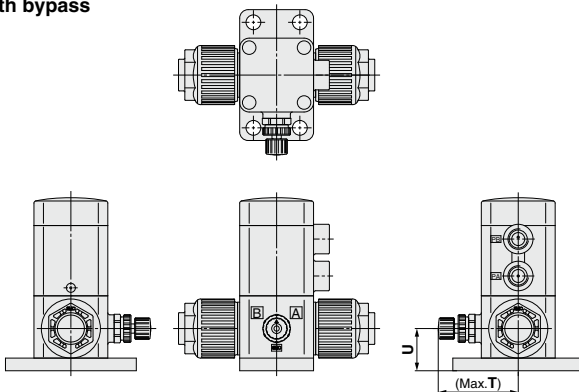

With indicator, High back pressure with indicator

| Dimensions [mm] |       |
|-----------------|-------|
| Model           | W     |
| LVD20-V□-F4     | 56.4  |
| LVD30-V□-F4     | 87.3  |
| LVD40-V□-F4     | 89.8  |
| LVD50-V□-F4     | 114.6 |
| LVD60-V□-F4     | 149.4 |

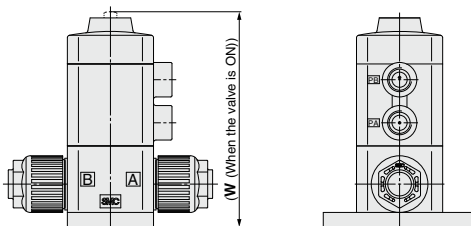

|            |
|------------|
| LVC        |
| LVA        |
| LVH        |
| <b>LVD</b> |
| LVQ        |
| LVP        |
| LVW        |
| LQ1        |
| LQ3        |
| LVN        |
| LQHB       |
| TL         |
| TIL        |
| TLM        |
| TILM       |
| TD         |
| TID        |
| TH         |
| TIH        |

# Air Operated Flare, Integrated Fittings LVD-F/FN Series

RoHS

## How to Order Valves

LVD **2** **0** - Z **07** **□** **□** - FN **□**

### Body class

| Symbol | Body class | Orifice dia. |
|--------|------------|--------------|
| 2      | 2          | ø4           |
| 3      | 3          | ø8           |
| 4      | 4          | ø10          |
| 5      | 5          | ø16          |
| 6      | 6          | ø22          |

### Valve type

|   |               |
|---|---------------|
| 0 | N.C.          |
| 1 | N.O.          |
| 2 | Double acting |

### Fitting type

| Symbol | Model |
|--------|-------|
| Z      | LQ3   |

### Applicable tubing size

| Symbol             | Connecting tubing size | Body class |   |   |   |   |   |
|--------------------|------------------------|------------|---|---|---|---|---|
|                    |                        | 2          | 3 | 4 | 5 | 6 |   |
| <b>Metric size</b> |                        |            |   |   |   |   |   |
| 06                 | 6 x 4                  | ○          |   |   |   |   |   |
| 08                 | 8 x 6                  |            | ○ |   |   |   |   |
| 10                 | 10 x 8                 |            |   | ○ |   |   |   |
| 12                 | 12 x 10                |            |   |   | ○ |   |   |
| 19                 | 19 x 16                |            |   |   |   | ○ |   |
| 25                 | 25 x 22                |            |   |   |   |   | ○ |
| <b>Inch size</b>   |                        |            |   |   |   |   |   |
| 07                 | 1/4" x 5/32"           | ○          |   |   |   |   |   |
| 11                 | 3/8" x 1/4"            |            | ○ |   |   |   |   |
| 13                 | 1/2" x 3/8"            |            |   | ○ |   |   |   |
| 19                 | 3/4" x 5/8"            |            |   |   |   | ○ |   |
| 25                 | 1" x 7/8"              |            |   |   |   |   | ○ |

### Option

|     |  |
|-----|--|
| Nil | None   |
| 1   | With flow rate adjustment                    |
| 4   | With indicator                               |
| 5   | High back pressure (0.5 MPa) tolerant        |
| 6   | High back pressure with flow rate adjustment |
| 9   | High back pressure with indicator            |

Note) With flow rate adjustment: Only available with N.C. valve and double acting valve  
With indicator: Only available with N.C. valve


### Material

| Symbol | Body | Actuator section |           |      |        |
|--------|------|------------------|-----------|------|--------|
|        |      | End plate        | Diaphragm | Seal | Buffer |
| F      | PFA  | PVDF             | PTFE      | FKM  |        |
| FN     | PFA  | PVDF             | PTFE      | EPDM |        |

### Pilot port position

| Symbol | Position |
|--------|----------|
| Nil    | ①        |
| P2     | ②        |
| P3     | ③        |
| P4     | ④        |

Note) P2 and P4 are not available for the LVD6□.



### Pilot port thread type

|     |        |
|-----|--------|
| Nil | Rc1/8  |
| N   | NPT1/8 |

## Standard Specifications


| Model                                |                    | LVD20                                       | LVD30       | LVD40       | LVD50 | LVD60       |
|--------------------------------------|--------------------|---|-------------|-------------|-------|-------------|
| Tubing O.D.                          | Metric             | 6   | 8, 10       | 12          | 19    | 25          |
|                                      | Inch               | 1/4   | 3/8         | 1/2         | 3/4   | 1           |
| Orifice diameter                     |                    | ø4  | ø8          | ø10         | ø16   | ø22         |
| Flow rate characteristics            | Kv                 | 0.3   | 1.1         | 1.6         | 4.2   | 6.8         |
|                                      | Cv                 | 0.35  | 1.3         | 1.9         | 5     | 8           |
| Withstand pressure [MPa]             |                    | 1   |             |             |       |             |
| Operating pressure [MPa]             | Standard           | A→B flow                                    | 0 to 0.5    | 0 to 0.3    |       | 0 to 0.4    |
|                                      |                    | B→A flow                                    | 0 to 0.2    | 0 to 0.1    |       |             |
|                                      | High back pressure | A→B flow                                    | 0 to 0.5    |             |       |             |
|                                      |                    | B→A flow                                    | 0 to 0.4    |             |       |             |
| Back pressure [MPa]                  | Standard           | N.C./N.O.                                   | 0.3 or less | 0.2 or less |       | 0.2 or less |
|                                      |                    | Double acting                               | 0.3 or less |             |       |             |
|                                      | High back pressure | N.C./N.O./Double acting                     | 0.5 or less |             |       |             |
| Valve leakage [cm <sup>3</sup> /min] |                    | 0 (With water pressure)                     |             |             |       |             |
| Pilot air pressure [MPa]             |                    | 0.3 to 0.5 (High back pressure: 0.5 to 0.8) |             |             |       |             |
| Pilot port size                      |                    | Rc1/8, NPT1/8                               |             |             |       |             |
| Fluid temperature [°C]               |                    | 0 to 100                                    |             |             |       |             |
| Ambient temperature [°C]             |                    | 0 to 60                                     |             |             |       |             |

## ⚠️ Precautions

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions, and pages 768 and 769 for Compact Type High Purity Air Operated Chemical Liquid Valve Precautions.

## Dimensions

Basic type,  
High back pressure

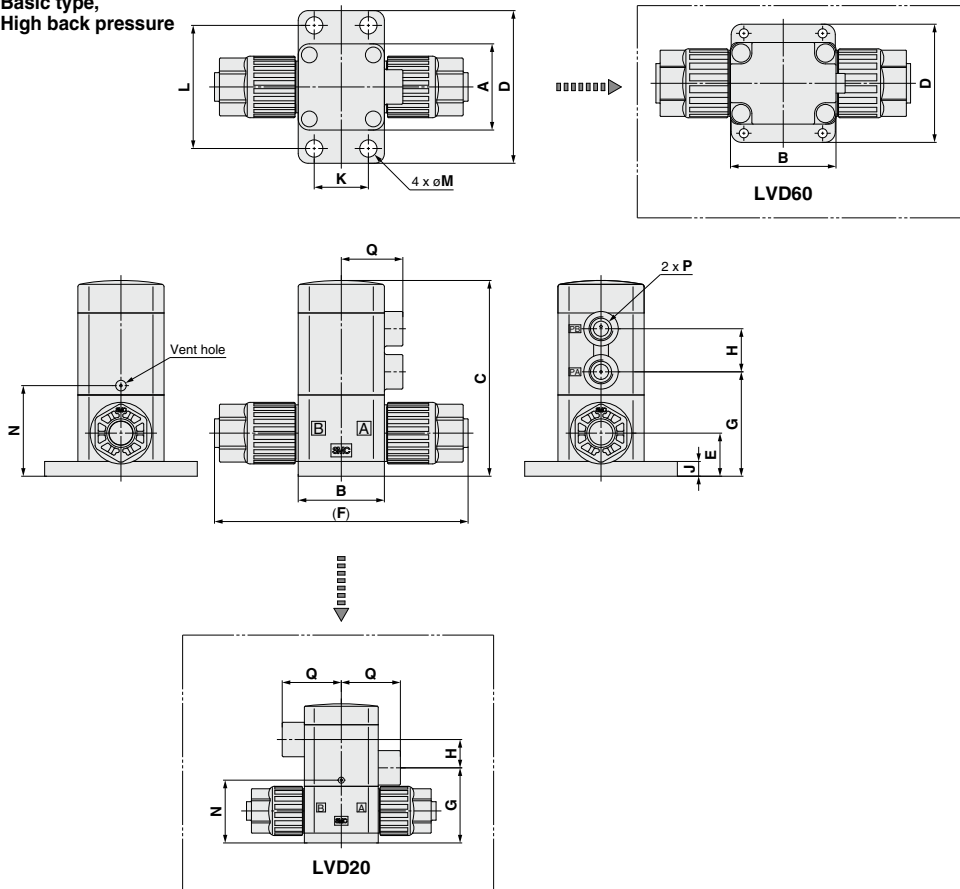

LVC

LVA

LVB

LVD

LVE

LVP

LWV

LQ1

LQ3

LVN

LQHB

TL

TIL

TLM

TILM

TD

TID

TH

TIH

## Dimensions


| Model       | A  | B  | C     | D  | E    | F   | G    | H    | J | K  | L  | M   | N    | P               | Q    |
|-------------|----|----|-------|----|------|-----|------|------|---|----|----|-----|------|-----------------|------|
| LVD2□-Z□-F□ | 30 | 30 | 56.5  | 56 | 13   | 77  | 30.5 | 11.5 | 4 | 20 | 44 | 7   | 25.5 | Rc1/8<br>NPT1/8 | 24   |
| LVD3□-Z□-F□ | 35 | 35 | 79.5  | 62 | 17.5 | 103 | 42.4 | 17.5 | 6 | 22 | 50 | 7   | 36.8 | Rc1/8<br>NPT1/8 | 25   |
| LVD4□-Z□-F□ | 35 | 35 | 82    | 62 | 20   | 112 | 44.9 | 17.5 | 6 | 22 | 50 | 7   | 39.3 | Rc1/8<br>NPT1/8 | 25   |
| LVD5□-Z□-F□ | 45 | 45 | 105.7 | 76 | 25   | 134 | 65.2 | 17.5 | 8 | 32 | 64 | 7   | 52.2 | Rc1/8<br>NPT1/8 | 27.5 |
| LVD6□-Z□-F□ | 58 | 74 | 137.8 | 84 | 32   | 181 | 76.8 | 27.5 | 8 | 56 | 71 | 6.5 | 70.8 | Rc1/8<br>NPT1/8 | 44   |

# LVD-F/FN Series

## Dimensions


With flow rate adjustment, High back pressure with flow rate adjustment

| Dimensions [mm] |      |
|-----------------|------|
| Model           | S    |
| LVD2□-Z□-F1     | 18.5 |
| LVD3□-Z□-F1     | 28.5 |
| LVD4□-Z□-F1     | 28.5 |
| LVD5□-Z□-F1     | 30.1 |
| LVD6□-Z□-F1     | 38   |

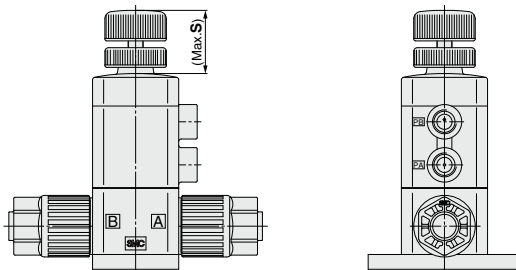

With indicator, High back pressure with indicator

| Dimensions [mm] |       |
|-----------------|-------|
| Model           | W     |
| LVD20-Z□-F4     | 58.4  |
| LVD30-Z□-F4     | 87.3  |
| LVD40-Z□-F4     | 89.8  |
| LVD50-Z□-F4     | 114.6 |
| LVD60-Z□-F4     | 149.4 |

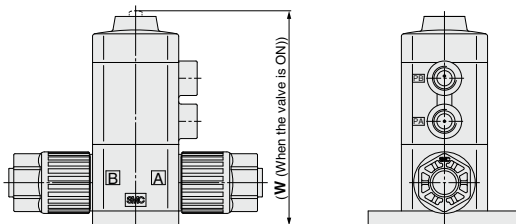

# Air Operated Tube Extensions LVD-T-F/FN Series

RoHS

## How to Order Valves

**LVD 2 0 - T 07 [ ] [ ] - FN [ ]**

**Body class**

| Symbol | Body class | Orifice dia. |
|--------|------------|--------------|
| 2      | 2          | ø4           |
| 3      | 3          | ø8           |
| 4      | 4          | ø10          |
| 5      | 5          | ø16          |
| 6      | 6          | ø22          |

**Valve type**

|   |               |
|---|---------------|
| 0 | N.C.          |
| 1 | N.O.          |
| 2 | Double acting |

**Fitting type**

| Symbol | Type            |
|--------|-----------------|
| T      | Tube extensions |

**Option**

|     |  |
|-----|--|
| Nil | None   |
| 1   | With flow rate adjustment                    |
| 4   | With indicator                               |
| 5   | High back pressure (0.5 MPa) tolerant        |
| 6   | High back pressure with flow rate adjustment |
| 9   | High back pressure with indicator            |

Note) With flow rate adjustment: Only available with N.C. valve and double acting valve  
With indicator: Only available with N.C. valve

**Material**

| Symbol | Body | Actuator section<br>End plate | Diaphragm | Seal | Buffer |
|--------|------|-------------------------------|-----------|------|--------|
| F      | PFA  | PVDF                          | PTFE      | FKM  |        |
| FN     | PFA  | PVDF                          | PTFE      | EPDM |        |

**Material**

| Symbol | Body | Actuator section<br>End plate | Diaphragm | Seal | Buffer |
|--------|------|-------------------------------|-----------|------|--------|
| F      | PFA  | PVDF                          | PTFE      | FKM  |        |
| FN     | PFA  | PVDF                          | PTFE      | EPDM |        |

**Tube O.D.**

| Symbol             | Tubing O.D. | Body class |   |   |   |   |  |
|--------------------|-------------|------------|---|---|---|---|--|
|                    |             | 2          | 3 | 4 | 5 | 6 |  |
| <b>Metric size</b> |             |            |   |   |   |   |  |
| 06                 | ø6          | ○          |   |   |   |   |  |
| 10                 | ø10         |            | ○ |   |   |   |  |
| 12                 | ø12         |            |   | ○ |   |   |  |
| 19                 | ø19         |            |   |   | ○ |   |  |
| 25                 | ø25         |            |   |   |   | ○ |  |
| <b>Inch size</b>   |             |            |   |   |   |   |  |
| 07                 | 1/4         | ○          |   |   |   |   |  |
| 11                 | 3/8         |            | ○ |   |   |   |  |
| 13                 | 1/2         |            |   | ○ |   |   |  |
| 19                 | 3/4         |            |   |   | ○ |   |  |
| 25                 | 1           |            |   |   |   | ○ |  |

**Pilot port position**

| Symbol | Position |
|--------|----------|
| Nil    | ①        |
| P2     | ②        |
| P3     | ③        |
| P4     | ④        |

Note) P2 and P4 are not available for the LVD6□.

**Pilot port thread type**

|     |        |
|-----|--------|
| Nil | Rc1/8  |
| N   | NPT1/8 |

## ⚠ Precautions

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions, and pages 768 and 769 for Compact Type High Purity Air Operated Chemical Liquid Valve Precautions.


## Standard Specifications

| Model                                |                    | LVD20                                       | LVD30       | LVD40       | LVD50 | LVD60       |
|--------------------------------------|--------------------|---|-------------|-------------|-------|-------------|
| Tubing O.D.                          | Metric             | 6   | 10          | 12          | 19    | 25          |
|                                      | Inch               | 1/4   | 3/8         | 1/2         | 3/4   | 1           |
| Orifice diameter                     |                    | ø4  | ø8          | ø10         | ø16   | ø22         |
| Flow rate characteristics            | Kv                 | 0.3   | 1.1         | 1.6         | 4.2   | 6.8         |
|                                      | Cv                 | 0.35  | 1.3         | 1.9         | 5     | 8           |
| Withstand pressure [MPa]             |                    | 1   |             |             |       |             |
| Operating pressure [MPa]             | Standard           | A→B flow                                    | 0 to 0.5    | 0 to 0.3    |       | 0 to 0.4    |
|                                      |                    | B→A flow                                    | 0 to 0.2    | 0 to 0.1    |       |             |
|                                      | High back pressure | A→B flow                                    | 0 to 0.5    |             |       |             |
|                                      |                    | B→A flow                                    | 0 to 0.4    |             |       |             |
| Back pressure [MPa]                  | Standard           | N.C./N.O.                                   | 0.3 or less | 0.2 or less |       | 0.2 or less |
|                                      |                    | Double acting                               | 0.3 or less |             |       |             |
|                                      | High back press.   | N.C./N.O./Double acting                     | 0.5 or less |             |       |             |
| Valve leakage [cm <sup>3</sup> /min] |                    | 0 (With water pressure)                     |             |             |       |             |
| Pilot air pressure [MPa]             |                    | 0.3 to 0.5 (High back pressure: 0.5 to 0.8) |             |             |       |             |
| Pilot port size                      |                    | Rc1/8, NPT1/8                               |             |             |       |             |
| Fluid temperature [°C]               |                    | 0 to 100                                    |             |             |       |             |
| Ambient temperature [°C]             |                    | 0 to 60                                     |             |             |       |             |

# LVD-T-F/FN Series

## Dimensions

### Basic type, High back pressure

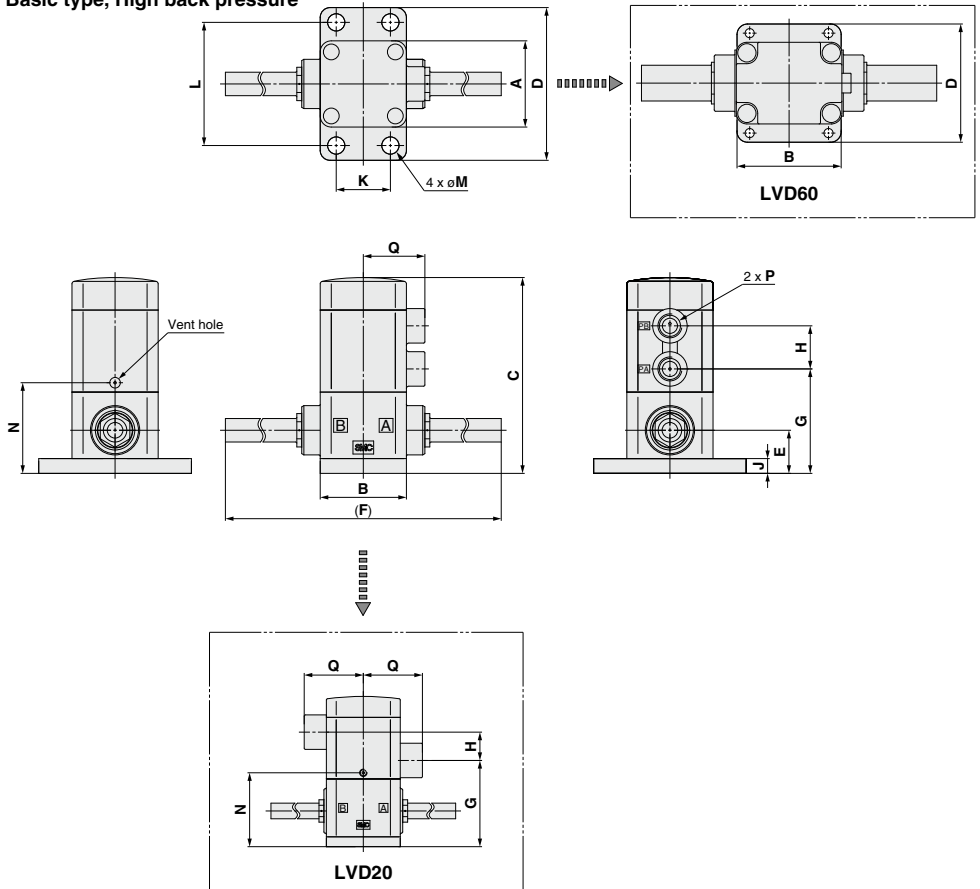


### Dimensions

| Model       | A  | B  | C     | D  | E    | F     | G    | H    | J | K  | L  | M   | N    | P               | Q    |
|-------------|----|----|-------|----|------|-------|------|------|---|----|----|-----|------|-----------------|------|
| LVD2□-T□-F□ | 30 | 30 | 61    | 56 | 14.5 | 103   | 35   | 11.5 | 4 | 20 | 44 | 7   | 30   | Rc1/8<br>NPT1/8 | 24   |
| LVD3□-T□-F□ | 35 | 35 | 79.5  | 62 | 17.5 | 136   | 42.4 | 17.5 | 6 | 22 | 50 | 7   | 36.8 | Rc1/8<br>NPT1/8 | 25   |
| LVD4□-T□-F□ | 35 | 35 | 82    | 62 | 20   | 137   | 44.9 | 17.5 | 6 | 22 | 50 | 7   | 39.3 | Rc1/8<br>NPT1/8 | 25   |
| LVD5□-T□-F□ | 45 | 45 | 105.7 | 76 | 25   | 169.5 | 65.2 | 17.5 | 8 | 32 | 64 | 7   | 52.2 | Rc1/8<br>NPT1/8 | 27.5 |
| LVD6□-T□-F□ | 58 | 74 | 137.8 | 84 | 32   | 210   | 76.8 | 27.5 | 8 | 56 | 71 | 6.5 | 70.8 | Rc1/8<br>NPT1/8 | 44   |

## Dimensions


With flow rate adjustment, High back pressure with flow rate adjustment

| Dimensions [mm] |      |
|-----------------|------|
| Model           | S    |
| LVD2□-T□-F1     | 18.5 |
| LVD3□-T□-F1     | 28.5 |
| LVD4□-T□-F1     | 28.5 |
| LVD5□-T□-F1     | 30.1 |
| LVD6□-T□-F1     | 38   |

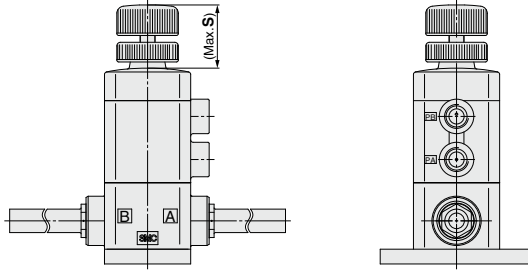

With indicator, High back pressure with indicator

| Dimensions [mm] |       |
|-----------------|-------|
| Model           | W     |
| LVD20-T□-F4     | 62.9  |
| LVD30-T□-F4     | 87.3  |
| LVD40-T□-F4     | 89.8  |
| LVD50-T□-F4     | 114.6 |
| LVD60-T□-F4     | 149.4 |

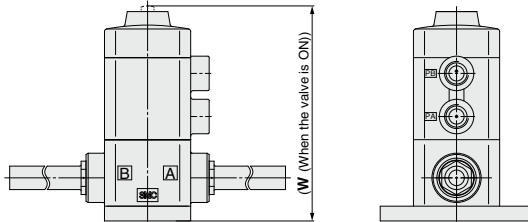

|      |
|------|
| LVC  |
| LVA  |
| LVB  |
| LVD  |
| LVDQ |
| LVP  |
| LWV  |
| LQ1  |
| LQ3  |
| LVN  |
| LQHB |
| TL   |
| TIL  |
| TLM  |
| TILM |
| TD   |
| TID  |
| TH   |
| TIH  |

# Manually Operated Insert Bushing, Integrated Fittings LVDH-F/FN Series RoHS

## How to Order Valves

LVDH **2** 0 - V **07** - **FN**

### Body class

| Symbol | Body class | Orifice dia. |
|--------|------------|--------------|
| 2      | 2          | ø4           |
| 3      | 3          | ø8           |
| 4      | 4          | ø10          |
| 5      | 5          | ø16          |
| 6      | 6          | ø22          |

### Fitting type

| Symbol | Model |
|--------|-------|
| V      | LQ1   |

### Material

| Symbol | Body | Actuator section |           |      |        |
|--------|------|------------------|-----------|------|--------|
|        |      | End plate        | Diaphragm | Seal | Buffer |
| F      | PFA  | PVDF             | PTFE      | FKM  |        |
| FN     | PFA  | PVDF             | PTFE      | EPDM |        |

### Applicable tubing size

| Symbol             | Connecting tubing size | Body class |   |   |   |   |
|--------------------|------------------------|------------|---|---|---|---|
|                    |                        | 2          | 3 | 4 | 5 | 6 |
| <b>Metric size</b> |                        |            |   |   |   |   |
| 03                 | 3 x 2                  | ●          |   |   |   |   |
| 04                 | 4 x 3                  | ●          |   |   |   |   |
| 06                 | 6 x 4                  | ○          | ● |   |   |   |
| 08                 | 8 x 6                  |            | ● |   |   |   |
| 10                 | 10 x 8                 |            | ○ | ● |   |   |
| 12                 | 12 x 10                |            | ○ | ● | ● |   |
| 19                 | 19 x 16                |            |   | ○ | ● |   |
| 25                 | 25 x 22                |            |   |   |   | ○ |
| <b>Inch size</b>   |                        |            |   |   |   |   |
| 03                 | 1/8" x 0.086"          | ●          |   |   |   |   |
| 05                 | 3/16" x 1/8"           | ●          |   |   |   |   |
| 07                 | 1/4" x 5/32"           | ○          | ● |   |   |   |
| 11                 | 3/8" x 1/4"            |            | ○ | ● |   |   |
| 13                 | 1/2" x 3/8"            |            |   | ○ | ● |   |
| 19                 | 3/4" x 5/8"            |            |   |   | ○ | ● |
| 25                 | 1" x 7/8"              |            |   |   |   | ○ |

○ Basic size ● With reducer

### Port B (OUT) different diameter size

| Symbol | Application  |
|--------|--|
| Nil    | Ports A & B same size  |
|        | Refer to the applicable tubing table to the left. Different diameter tubings can be selected within the same body class. |

## Standard Specifications

| Model                                |        | LVDH20                  | LVDH30   | LVDH40   | LVDH50   | LVDH60 |
|--------------------------------------|--------|-------------------------|----------|----------|----------|--------|
| Tubing O.D.                          | Metric | 3, 4, 6                 | 6, 8, 10 | 10, 12   | 12, 19   | 19, 25 |
|                                      | Inch   | 1/8, 3/16, 1/4          | 1/4, 3/8 | 3/8, 1/2 | 1/2, 3/4 | 3/4, 1 |
| Orifice diameter                     |        | ø4                      | ø8       | ø10      | ø16      | ø22    |
| Flow rate characteristics            | Kv     | 0.3                     | 1.1      | 1.6      | 4.2      | 6.8    |
|                                      | Cv     | 0.35                    | 1.3      | 1.9      | 5        | 8      |
| Withstand pressure [MPa]             |        | 1                       |          |          |          |        |
| Operating pressure [MPa]   A→B flow  |        | 0 to 0.5                |          |          |          |        |
| Valve leakage [cm <sup>3</sup> /min] |        | 0 (With water pressure) |          |          |          |        |
| Fluid temperature [°C]               |        | 0 to 100                |          |          |          |        |
| Ambient temperature [°C]             |        | 0 to 60                 |          |          |          |        |

## Different Diameter Tubing Applicable with Reducer

Different diameter tubing can be selected (within a body class) by using a nut and insert bushing (reducer).

● With reducer

| Body class | Tubing O.D. |   |   |   |    |    |           |    |     |      |     |     |     |     |   |
|------------|-------------|---|---|---|----|----|-----------|----|-----|------|-----|-----|-----|-----|---|
|            | Metric size |   |   |   |    |    | Inch size |    |     |      |     |     |     |     |   |
|            | 3           | 4 | 6 | 8 | 10 | 12 | 19        | 25 | 1/8 | 3/16 | 1/4 | 3/8 | 1/2 | 3/4 | 1 |
| 2          | ●           | ● | ○ | — | —  | —  | —         | —  | ●   | ●    | ○   | —   | —   | —   | — |
| 3          | —           | — | ● | ● | ○  | —  | —         | —  | —   | —    | ●   | ○   | —   | —   | — |
| 4          | —           | — | — | ● | ○  | —  | —         | —  | —   | —    | ●   | ○   | —   | —   | — |
| 5          | —           | — | — | — | —  | ●  | ○         | —  | —   | —    | —   | —   | ●   | ○   | — |
| 6          | —           | — | — | — | —  | —  | —         | ○  | ○   | —    | —   | —   | —   | —   | ○ |

Note) Refer to page 766 for information on changing tubing sizes.

760

## ⚠ Precautions

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions, and pages 768 and 769 for Compact Type High Purity Air Operated Chemical Liquid Valve Precautions.

### Handle Operation

In order to prevent valve breakage due to excessive handle operation, the number of handle rotations is shown in the table below as a guide for handle operation when opening or closing the valve.


Number of Handle Rotations (from fully open to fully closed)

| Body class | Number of rotations |
|------------|---------------------|
| 2          | 6 to 7              |
| 3          | 3 to 4              |
| 4          |                     |
| 5          | 5 to 6              |
| 6          |                     |



# Manually Operated Insert Bushing, Integrated Fittings *LVDH-F/FN Series*

## Dimensions

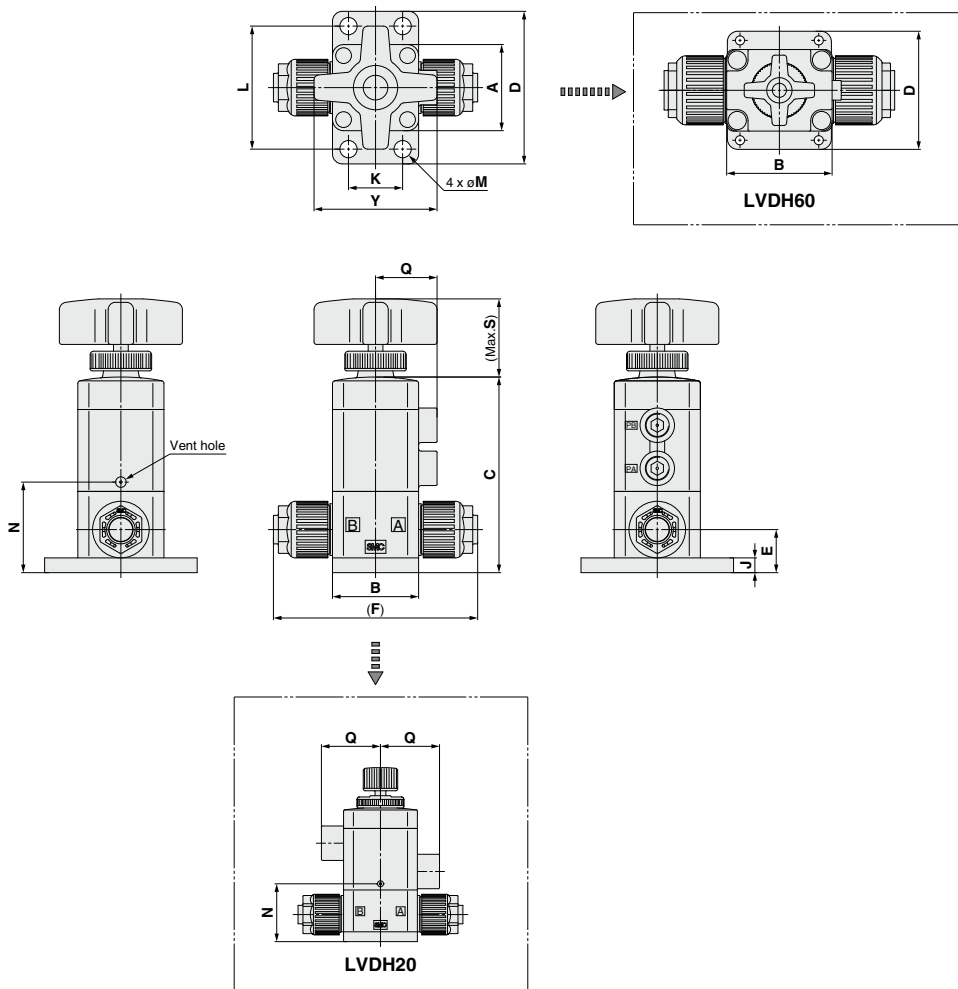

- LVQ
- LVA
- LVH
- LVD
- LVQ
- LVP
- LVW
- LQ1
- LQ3
- LVN
- LQHB
- TL
- TIL
- TLM
- TILM
- TD
- TID
- TH
- TIH

## Dimensions

| Model        | A  | B  | C     | D  | E    | F   | J | K  | L  | M   | N    | Q    | S    | Y  |
|--------------|----|----|-------|----|------|-----|---|----|----|-----|------|------|------|----|
| LVDH20-V□-F□ | 30 | 30 | 54.5  | 56 | 11   | 67  | 4 | 20 | 44 | 7   | 23.5 | 24   | 18.5 | —  |
| LVDH30-V□-F□ | 35 | 35 | 79.5  | 62 | 17.5 | 83  | 6 | 22 | 50 | 7   | 36.8 | 25   | 34.6 | 50 |
| LVDH40-V□-F□ | 35 | 35 | 82    | 62 | 20   | 93  | 6 | 22 | 50 | 7   | 39.3 | 25   | 34.6 | 50 |
| LVDH50-V□-F□ | 45 | 45 | 105.7 | 76 | 25   | 114 | 8 | 32 | 64 | 7   | 52.2 | 27.5 | 36.2 | 50 |
| LVDH60-V□-F□ | 58 | 74 | 137.8 | 84 | 32   | 164 | 8 | 56 | 71 | 6.5 | 70.8 | 44   | 39   | 50 |

[mm]

# Manually Operated Flare, Integrated Fittings **LVDH-F/FN Series** RoHS

## How to Order Valves

LVDH 2 0 - Z 07 - FN

### Body class

| Symbol | Body class | Orifice dia. |
|--------|------------|--------------|
| 2      | 2          | ø4           |
| 3      | 3          | ø8           |
| 4      | 4          | ø10          |
| 5      | 5          | ø16          |
| 6      | 6          | ø22          |

### Material

| Symbol | Body | Actuator section |      | Diaphragm | Seal | Buffer |
|--------|------|------------------|------|-----------|------|--------|
|        |      | End plate        |      |           |      |        |
| F      | PFA  | PVDF             | PTFE | FKM       |      |        |
| FN     | PFA  | PVDF             | PTFE | EPDM      |      |        |

### Fitting type

| Symbol | Model |
|--------|-------|
| Z      | LQ3   |

### Applicable tubing size

| Symbol             | Connecting tubing size | Body class |   |   |   |   |   |
|--------------------|------------------------|------------|---|---|---|---|---|
|                    |                        | 2          | 3 | 4 | 5 | 6 |   |
| <b>Metric size</b> |                        |            |   |   |   |   |   |
| 06                 | 6 x 4                  | ○          |   |   |   |   |   |
| 08                 | 8 x 6                  |            | ○ |   |   |   |   |
| 10                 | 10 x 8                 |            |   | ○ |   |   |   |
| 12                 | 12 x 10                |            |   |   | ○ |   |   |
| 19                 | 19 x 16                |            |   |   |   | ○ |   |
| 25                 | 25 x 22                |            |   |   |   |   | ○ |
| <b>Inch size</b>   |                        |            |   |   |   |   |   |
| 07                 | 1/4" x 5/32"           | ○          |   |   |   |   |   |
| 11                 | 3/8" x 1/4"            |            | ○ |   |   |   |   |
| 13                 | 1/2" x 3/8"            |            |   | ○ |   |   |   |
| 19                 | 3/4" x 5/8"            |            |   |   |   | ○ |   |
| 25                 | 1" x 7/8"              |            |   |   |   |   | ○ |

## Standard Specifications

| Model                                |        | LVDH20                  | LVDH30 | LVDH40 | LVDH50 | LVDH60 |
|--------------------------------------|--------|-------------------------|--------|--------|--------|--------|
| Tubing O.D.                          | Metric | 6                       | 8, 10  | 12     | 19     | 25     |
|                                      | Inch   | 1/4                     | 3/8    | 1/2    | 3/4    | 1      |
| Orifice diameter                     |        | ø4                      | ø8     | ø10    | ø16    | ø22    |
| Flow rate characteristics            | Kv     | 0.3                     | 1.1    | 1.6    | 4.2    | 6.8    |
|                                      | Cv     | 0.35                    | 1.3    | 1.9    | 5      | 8      |
| Withstand pressure [MPa]             |        | 1                       |        |        |        |        |
| Operating pressure [MPa]   A→B flow  |        | 0 to 0.5                |        |        |        |        |
| Valve leakage [cm <sup>3</sup> /min] |        | 0 (With water pressure) |        |        |        |        |
| Fluid temperature [°C]               |        | 0 to 100                |        |        |        |        |
| Ambient temperature [°C]             |        | 0 to 60                 |        |        |        |        |

## ⚠️ Precautions

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions, and pages 768 and 769 for Compact Type High Purity Air Operated Chemical Liquid Valve Precautions.




## Handle Operation

In order to prevent valve breakage due to excessive handle operation, the number of handle rotations is shown in the table below as a guide for handle operation when opening or closing the valve.

Number of Handle Rotations  
(from fully open to fully closed)

| Body class | Number of rotations |
|------------|---------------------|
| 2          | 6 to 7              |
| 3          | 3 to 4              |
| 4          |                     |
| 5          | 5 to 6              |
| 6          |                     |

**Dimensions**

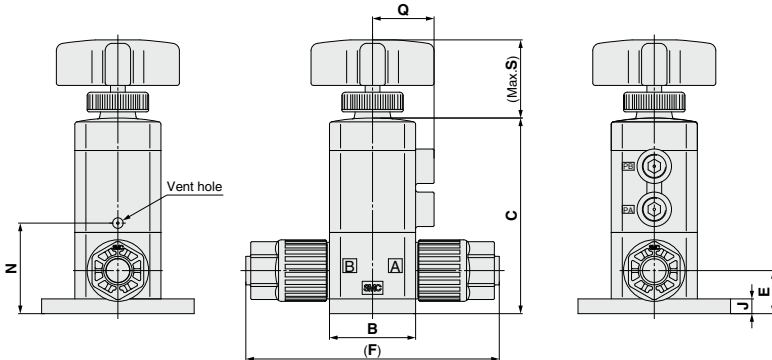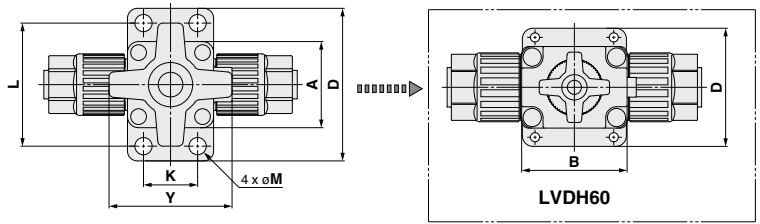

- LVC
- LVA
- LVH
- LVD
- LVQ
- LVP
- LVW
- LQ1
- LQ3
- LVN
- LQHB
- TL
- TIL
- TLM
- TILM
- TD
- TID
- TH
- TIH

**Dimensions**

| Model        | A  | B  | C     | D  | E    | F   | J | K  | L  | M   | N    | Q    | S    | Y  |
|--------------|----|----|-------|----|------|-----|---|----|----|-----|------|------|------|----|
| LVDH20-Z□-F□ | 30 | 30 | 56.5  | 56 | 13   | 77  | 4 | 20 | 44 | 7   | 25.5 | 24   | 18.5 | —  |
| LVDH30-Z□-F□ | 35 | 35 | 79.5  | 62 | 17.5 | 103 | 6 | 22 | 50 | 7   | 36.8 | 25   | 34.6 | 50 |
| LVDH40-Z□-F□ | 35 | 35 | 82    | 62 | 20   | 112 | 6 | 22 | 50 | 7   | 39.3 | 25   | 34.6 | 50 |
| LVDH50-Z□-F□ | 45 | 45 | 105.7 | 76 | 25   | 134 | 8 | 32 | 64 | 7   | 52.2 | 27.5 | 36.2 | 50 |
| LVDH60-Z□-F□ | 58 | 74 | 137.8 | 84 | 32   | 181 | 8 | 56 | 71 | 6.5 | 70.8 | 44   | 39   | 50 |

[mm]

# Manually Operated Tube Extensions **LVDH-T-F/FN Series**

RoHS

## How to Order Valves

LVDH **2** 0 - T **07** - **FN**

### Body class

| Symbol | Body class | Orifice dia. |
|--------|------------|--------------|
| 2      | 2          | ø4           |
| 3      | 3          | ø8           |
| 4      | 4          | ø10          |
| 5      | 5          | ø16          |
| 6      | 6          | ø22          |

### Material

| Symbol | Body | Actuator section |      | Diaphragm | Seal | Buffer |
|--------|------|------------------|------|-----------|------|--------|
|        |      | End plate        |      |           |      |        |
| F      | PFA  | PVDF             | PTFE |           | FKM  |        |
| FN     | PFA  | PVDF             | PTFE |           | EPDM |        |

### Fitting type

| Symbol | Type            |
|--------|-----------------|
| T      | Tube extensions |

### Tubing O.D.

| Symbol             | Tubing O.D. | Body class |   |   |   |   |   |
|--------------------|-------------|------------|---|---|---|---|---|
|                    |             | 2          | 3 | 4 | 5 | 6 |   |
| <b>Metric size</b> |             |            |   |   |   |   |   |
| 06                 | ø6          | ○          |   |   |   |   |   |
| 10                 | ø10         |            | ○ |   |   |   |   |
| 12                 | ø12         |            |   | ○ |   |   |   |
| 19                 | ø19         |            |   |   |   | ○ |   |
| 25                 | ø25         |            |   |   |   |   | ○ |
| <b>Inch size</b>   |             |            |   |   |   |   |   |
| 07                 | 1/4         | ○          |   |   |   |   |   |
| 11                 | 3/8         |            | ○ |   |   |   |   |
| 13                 | 1/2         |            |   | ○ |   |   |   |
| 19                 | 3/4         |            |   |   |   | ○ |   |
| 25                 | 1           |            |   |   |   |   | ○ |

## Standard Specifications

| Model                                |        | LVDH20                  | LVDH30 | LVDH40 | LVDH50 | LVDH60 |
|--------------------------------------|--------|-------------------------|--------|--------|--------|--------|
| Tubing O.D.                          | Metric | 6                       | 10     | 12     | 19     | 25     |
|                                      | Inch   | 1/4                     | 3/8    | 1/2    | 3/4    | 1      |
| Orifice diameter                     |        | ø4                      | ø8     | ø10    | ø16    | ø22    |
| Flow rate characteristics            | Kv     | 0.3                     | 1.1    | 1.6    | 4.2    | 6.8    |
|                                      | Cv     | 0.35                    | 1.3    | 1.9    | 5      | 8      |
| Withstand pressure [MPa]             |        | 1                       |        |        |        |        |
| Operating pressure [MPa]   A→B flow  |        | 0 to 0.5                |        |        |        |        |
| Valve leakage [cm <sup>3</sup> /min] |        | 0 (With water pressure) |        |        |        |        |
| Fluid temperature [°C]               |        | 0 to 100                |        |        |        |        |
| Ambient temperature [°C]             |        | 0 to 60                 |        |        |        |        |

## ⚠ Precautions

Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions, and pages 768 and 769 for Compact Type High Purity Air Operated Chemical Liquid Valve Precautions.


### Handle Operation

In order to prevent valve breakage due to excessive handle operation, the number of handle rotations is shown in the table below as a guide for handle operation when opening or closing the valve.

Number of Handle Rotations  
(from fully open to fully closed)

| Body class | Number of rotations |
|------------|---------------------|
| 2          | 6 to 7              |
| 3          | 3 to 4              |
| 4          |                     |
| 5          | 5 to 6              |
| 6          |                     |

**Dimensions**

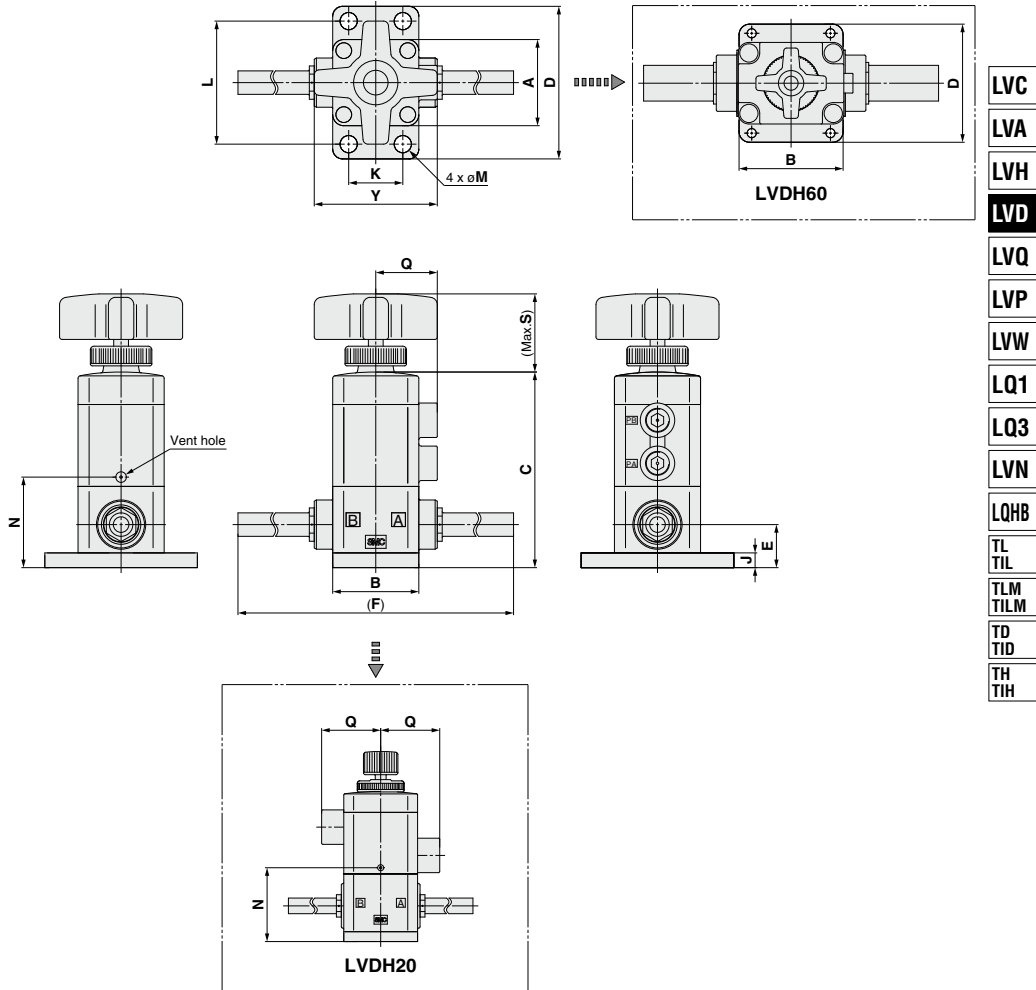

**Dimensions**

| Model        | A  | B  | C     | D  | E    | F     | J | K  | L  | M   | N    | Q    | S    | Y  |
|--------------|----|----|-------|----|------|-------|---|----|----|-----|------|------|------|----|
| LVDH20-T□-F□ | 30 | 30 | 61    | 56 | 14.5 | 103   | 4 | 20 | 44 | 7   | 30   | 24   | 18.5 | —  |
| LVDH30-T□-F□ | 35 | 35 | 79.5  | 62 | 17.5 | 136   | 6 | 22 | 50 | 7   | 36.8 | 25   | 34.6 | 50 |
| LVDH40-T□-F□ | 35 | 35 | 82    | 62 | 20   | 137   | 6 | 22 | 50 | 7   | 39.3 | 25   | 34.6 | 50 |
| LVDH50-T□-F□ | 45 | 45 | 105.7 | 76 | 25   | 169.5 | 8 | 32 | 64 | 7   | 52.2 | 27.5 | 36.2 | 50 |
| LVDH60-T□-F□ | 58 | 74 | 137.8 | 84 | 32   | 210   | 8 | 56 | 71 | 6.5 | 70.8 | 44   | 39   | 50 |

[mm]

## Fittings

### Changing Tubing Sizes

The tubing size can be changed within the same body class (body size) by replacing the nut and insert bushing.


| Body class | Tubing O.D. |   |   |   |    |    |    |           |     |      |     |     |     |     |   |
|------------|-------------|---|---|---|----|----|----|-----------|-----|------|-----|-----|-----|-----|---|
|            | Metric size |   |   |   |    |    |    | Inch size |     |      |     |     |     |     |   |
|            | 3           | 4 | 6 | 8 | 10 | 12 | 19 | 25        | 1/8 | 3/16 | 1/4 | 3/8 | 1/2 | 3/4 | 1 |
| 1          | ○           | ○ | — | — | —  | —  | —  | —         | ○   | ○    | —   | —   | —   | —   | — |
| 2          | ●           | ● | ○ | — | —  | —  | —  | —         | ●   | ●    | ○   | —   | —   | —   | — |
| 3          | —           | — | ● | ● | ○  | —  | —  | —         | —   | —    | ○   | —   | —   | —   | — |
| 4          | —           | — | — | — | ●  | ○  | —  | —         | —   | —    | ●   | ○   | —   | —   | — |
| 5          | —           | — | — | — | —  | ●  | ○  | —         | —   | —    | —   | ●   | ○   | —   | — |
| 6          | —           | — | — | — | —  | —  | ●  | ○         | —   | —    | —   | —   | —   | ●   | ○ |

### Changing tubing sizes

Example) Changing the tubing from an outside diameter of 1/4" to 1/8" in body class 2.

Prepare an insert bushing and nut for tubing O.D. 1/8" (LQ1-2U03) and change the tubing size. (Refer to the section on how to order fitting parts.)

Note) Tubing is sold separately.

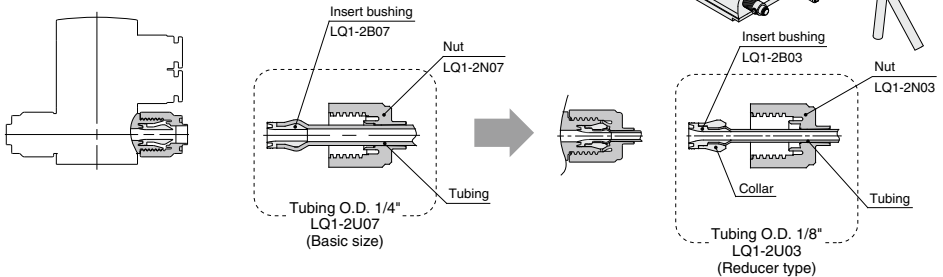


### Part Composition

|                | Component parts |        |                          |
|----------------|-----------------|--------|--------------------------|
|                | Nut             | Insert | Collar (Insert assembly) |
| ○ Basic size   | Yes             | Yes    | No                       |
| ● Reducer type | Yes             | Yes    | Yes                      |

### ⚠ Caution

#### 1. Connect tubing with special tools.

Refer to the pamphlet "High-Purity Fluoropolymer Fittings Hyper Fitting/Series LQ1, 2 Work Procedure Instructions" (M-E05-1) for connecting tubing and special tools. (Downloadable from our website.)

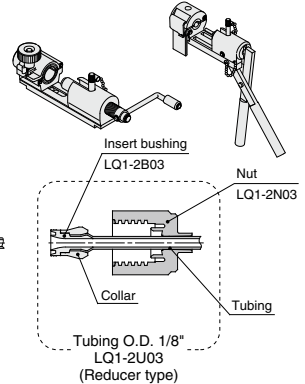

### How to Order Fitting Parts

**LQ1-1U03**

\* Type U is recommended when changing tubing sizes.

| Type of part |                      | Tubing size <sup>Note)</sup> |                      | Body class (fittings) |
|--------------|----------------------|------------------------------|----------------------|-----------------------|
| Symbol       | Type of part         | Symbol                       | Tubing size          |                       |
| U            | Nut & Insert bushing | 03                           | 1/8" x 0.086", 3 x 2 | 1                     |
| B            | Insert bushing       | 04                           | 4 x 3                |                       |
| N            | Nut                  | 03                           | 1/8" x 0.086"        | 2                     |
|              |                      | 04                           | 4 x 3                |                       |
|              |                      | 05                           | 3/16" x 1/8"         | 3                     |
|              |                      | 06                           | 6 x 4                |                       |
|              |                      | 07                           | 1/4" x 5/32"         | 4                     |
|              |                      | 06                           | 6 x 4                |                       |
|              |                      | 08                           | 8 x 6                | 5                     |
|              |                      | 10                           | 10 x 8               |                       |
|              |                      | 07                           | 1/4" x 5/32"         | 6                     |
|              |                      | 11                           | 3/8" x 1/4"          |                       |
|              |                      | 10                           | 10 x 8               | 4                     |
|              |                      | 12                           | 12 x 10              |                       |
|              |                      | 11                           | 3/8" x 1/4"          | 5                     |
|              |                      | 13                           | 1/2" x 3/8"          |                       |
|              |                      | 12                           | 12 x 10              | 6                     |
|              |                      | 13                           | 1/2" x 3/8"          |                       |
|              |                      | 19                           | 3/4" x 5/8", 19 x 16 | 6                     |
|              |                      | 19                           | 3/4" x 5/8", 19 x 16 |                       |
|              |                      | 25                           | 1" x 7/8", 25 x 22   |                       |

Note) Refer to page 769 for details on the applicable tubing sizes.



# LVD Series Applicable Fluids

## High Purity Air Operated Chemical Liquid Valve Material and Fluid Compatibility Check List

| Chemical                                    | Compatibility  |
|---|--|
| Acetone                                     | <input type="radio"/> Note 1) 2)   |
| Ammonium hydroxide                          | <input type="radio"/> Note 2)  |
| Isobutyl alcohol                            | <input type="radio"/> Note 1) 2)   |
| Isopropyl alcohol                           | <input type="radio"/> Note 1) 2)   |
| Hydrochloric acid                           | <input type="radio"/>  |
| Ozone (dry)                                 | <input type="radio"/>  |
| Hydrogen peroxide                           | Concentration 5% or less,<br>Temperature 50°C or less<br><input type="radio"/> |
| Ethyl acetate                               | <input type="radio"/> Note 1) 2)   |
| Butyl acetate                               | <input type="radio"/> Note 1) 2)   |
| Nitric acid (except fuming nitric acid)     | Concentration 10% or less<br><input type="radio"/> Note 2)                     |
| DI water (deionized water)                  | <input type="radio"/>  |
| Sodium hydroxide (caustic soda)             | Concentration 50% or less<br><input type="radio"/>                             |
| Nitrogen gas                                | <input type="radio"/>  |
| Ultrapure water                             | <input type="radio"/>  |
| Toluene                                     | <input type="radio"/> Note 1) 2)   |
| Hydrofluoric acid                           | ×  |
| Sulfuric acid (except fuming sulfuric acid) | <input type="radio"/> Note 2)  |
| Phosphoric acid                             | Concentration 80% or less<br><input type="radio"/>                             |

Table symbols  
 : Can be used.  
 : Can be used under certain conditions.  
 × : Cannot be used.

The material and fluid compatibility check list provides reference values as a guide only.  
 Note 1) Since static electricity may be generated, implement suitable countermeasures.  
 Note 2) Use caution as permeation may occur. The permeated fluid may effect the parts of other materials.

- Compatibility is indicated for fluid temperatures of 100°C or less.
- The material and fluid compatibility check list provides reference values as a guide only, therefore we do not guarantee the application to our product.
- The data above is based on the information presented by the material manufacturers.
- SMC is not responsible for its accuracy and any damage happened because of this data.

|      |
|------|
| LVC  |
| LVA  |
| LVB  |
| LVD  |
| LVQ  |
| LVP  |
| LVW  |
| LQ1  |
| LQ3  |
| LVN  |
| LQHB |
| TL   |
| TIL  |
| TLM  |
| TILM |
| TD   |
| TID  |
| TH   |
| TIH  |



# Compact Type High Purity Air Operated Chemical Liquid Valve Precautions 1

Be sure to read this before handling the products.

## Design / Selection

### Warning

#### 1. Check the specifications.

Give careful consideration to operating conditions such as the application, fluid and environment, and use within the operating ranges specified in this catalog.

#### 2. Fluids

Operate after confirming the compatibility of the product's component materials with fluids, using the check list on page 767. Please contact SMC regarding fluids other than those in the check list. Operate within the indicated fluid temperature range.

#### 3. Maintenance space

Ensure the necessary space for maintenance and inspections.

#### 4. Fluid pressure range

Keep the supplied fluid pressure within the operating pressure range shown in the catalog.

#### 5. Ambient environment

Install the product in an environment where there is no effect from radiant heat caused by heat sources, etc., and use within the ambient operating temperature range. After confirming the compatibility of the product's component materials with the ambient environment, operate so that fluid does not adhere to the product's exterior surfaces.

#### 6. Liquid seals

When circulating fluid:

Provide a relief valve in the system so that fluid does not get into the liquid seal circuit.

#### 7. Countermeasures for static electricity

Since static electricity may be generated depending on the fluid being used, implement suitable countermeasures.

## Mounting

### Warning

#### 1. If air leakage increases or equipment does not operate properly, stop operation.

After mounting, perform suitable function and leak tests to confirm that the mounting is correct.

#### 2. Operation Manual

Mount and operate the product after reading the manual carefully and understanding its contents. Also, keep the manual where it can be referred to as necessary.

## Piping

### Caution

#### 1. Preparation before piping

Before piping is connected, it should be thoroughly blown out with air (flushing) or washed to remove chips, cutting oil and other debris from inside the pipe.

Install piping so that it does not apply pulling, pressing, bending or other forces on the valve body.

## Piping

### Caution

#### 2. Use the tightening torques shown below for the threaded pilot port.

##### Tightening Torque for Operating Port

| Operating port | Torque [N·m]   |
|----------------|--|
| M5             | 1/6 turn with a tightening tool after first tightening by hand |
| Rc, NPT1/8     | 0.8 to 1.0   |


#### 3. Use pilot ports and sensor (breathing) ports as indicated below.

|               | PA port   | PB port   | Sensor (breathing) port |
|---------------|-----------|-----------|-------------------------|
| N.C.          | Pressure  | Breathing | Breathing               |
| N.O.          | Breathing | Pressure  | Breathing               |
| Double acting | Pressure  | Pressure  | Breathing               |

In the case of N.C. and N.O. types, the port which does not receive operating pressure is released to atmosphere. When intake and exhaust directly from the valve is not desired due to problems with the ambient environment or scattering of dust, etc., install piping and perform intake and exhaust at a location which does not present a problem.

#### 4. Connect tubing with special tools.

Refer to the pamphlet "High-Purity Fluoropolymer Fittings Hyper Fitting/Series LQ1, 2 Work Procedure Instructions" (M-E05-1) or "High Purity Fluoropolymer Fittings Hyper Fitting/Flare Type Series LQ3 Fitting Procedure" (M-E06-4) for connecting tubing and special tools. (Downloadable from our web site.)

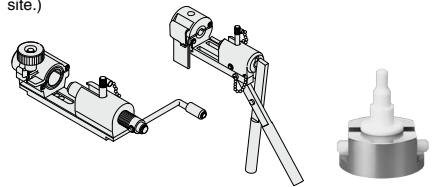

#### 5. Tighten the nut until it touches the end surface of the body, and then tighten it an additional 1/8 turn. If the nut won't turn any further, then it means a sufficient tightening has occurred. Refer to the proper tightening torques shown below.

##### Tightening Torque for Piping

| Body class | Torque [N·m] |              |
|------------|--------------|--------------|
|            | LQ1          | LQ3          |
| 2          | 0.3 to 0.4   | 1.6 to 1.8   |
| 3          | 0.8 to 1.0   | 3.2 to 3.5   |
| 4          | 1.0 to 1.2   | 5.0 to 5.3   |
| 5          | 2.5 to 3.0   | 10.0 to 10.5 |
| 6          | 5.5 to 6.0   | 22.5 to 23.0 |

## Operating Air Supply

### Warning

#### 1. Use clean air.

Do not use compressed air which includes chemicals, synthetic oils containing organic solvents, salt, or corrosive gases, etc., as this may cause damage or malfunction.





# Compact Type High Purity Air Operated Chemical Liquid Valve Precautions 2

Be sure to read this before handling the products.

## Installation and Removal of Tubing for Pilot Port Section

### ⚠ Caution

#### 1. Installation of tubing

- Using tube cutters TK-1, 2 or 3, take a tube having no flaws on its periphery and cut it off at a right angle. Do not use pinchers, nippers or scissors, etc. The tubing might be cut diagonally or flattened, making installation impossible or causing problems such as disconnection and leakage.
- Hold the tube and push it in slowly, inserting it securely all the way into the fitting.
- After inserting the tubing, pull on it tightly to confirm that it will not come out. If it is not installed securely all the way into the fitting, problems such as leakage or disconnection of the tubing can occur.
- Grease is not used due to the KP series oil-free specification. For this reason, greater insertion force is required when tubing is installed. In particular, polyurethane tubing may fold when inserted due to its softness. Hold the end of the tubing, and insert it all the way in slowly and securely. Refer to dimension "M" in the dimension drawings for guidance on the insertion depth of tubing.

#### 2. Removal of tubing

- Push in the release button sufficiently, pressing the collar evenly around its circumference.
- Pull out the tubing while holding down the release button so that it does not pop out. If the release button is not pressed down sufficiently, there will be increased bite on the tubing and it will become more difficult to pull it out.
- When the removed tubing is to be used again, first cut off the section of the tubing which has been chewed. Using the chewed portion of the tube as it is can cause problems such as leakage or difficulty in removing the tubing.

## Precautions on Use of Other Tubing Brands

### ⚠ Caution

- When using tubing brands other than SMC, confirm that the tubing outside diameter tolerances satisfy the following specifications.

- |                         |   |
|-------------------------|---|
| 1) Polyolefin tubing:   | Within $\pm 0.1$ mm                       |
| 2) Polyurethane tubing: | Within $\pm 0.15$ mm,<br>Within $-0.2$ mm |
| 3) Nylon tubing:        | Within $\pm 0.1$ mm                       |
| 4) Soft nylon tubing:   | Within $\pm 0.1$ mm                       |

Do not use tubing if the outside diameter tolerance is not satisfied. It may not be possible to connect the tubing, or leakage or disconnection may occur after connection. Polyolefin tubing is recommended for use with clean room fittings. Note that while other types of tubing will satisfy performance standards for leakage and tubing pull-out strength, etc., the degree of cleanliness will deteriorate.

## Operating Environment

### ⚠ Warning

- Do not use in a location having an explosive atmosphere.
- Do not operate in locations where vibration or impact occurs.

## Operating Environment

### ⚠ Warning

- Do not use in locations where radiated heat will be received from nearby heat sources.
- Do not use in environments which exceed the ambient temperature specifications of the product.

## Maintenance

### ⚠ Warning

- Maintenance should be performed in accordance with the procedures in the Operation Manual.

Incorrect handling can cause damage or malfunction of machinery and equipment, etc.

- Before removing equipment or compressed air supply/exhaust devices, shut off the air and power supplies, and exhaust compressed air from the system. Further, when restarting equipment after remounting or replacement, first confirm safety and then check the equipment for normal operation.

- Perform work after removing residual chemicals and carefully replacing them with DI water or air, etc.

- Do not disassemble the product. Products which have been disassembled cannot be guaranteed.

If disassembly is necessary, please contact SMC.

- In order to obtain optimum performance from valves, perform periodic inspections to confirm that there are no leaks from valves or fittings, etc.

### ⚠ Caution

- Removal of drainage

Flush drainage from filters regularly.

## Use of Tubing

### ⚠ Caution

- Refer to the applicable tubing sizes shown below for tubing to be used.

#### Applicable Tubing Sizes

|             | Connection tubing size | O.D. [mm]     |              | Internal thickness [mm] |           |
|-------------|------------------------|---------------|--------------|-------------------------|-----------|
|             |                        | Standard size | Tolerance    | Standard size           | Tolerance |
| Metric size | ø3 x ø2                | 3.0           | +0.2<br>-0.1 | 0.5                     | ±0.06     |
|             | ø4 x ø3                | 4.0           |              |                         |           |
|             | ø6 x ø4                | 6.0           |              |                         |           |
|             | ø8 x ø6                | 8.0           | +0.3<br>-0.1 | 1.0                     |           |
|             | ø10 x ø8               | 10.0          |              |                         |           |
|             | ø12 x ø10              | 12.0          |              |                         |           |
|             | ø19 x ø16              | 19.0          |              |                         |           |
| ø25 x ø22   | 25.0                   | 1.5           | ±0.15        |                         |           |
| Inch size   | 1/8" x 0.086"          | 3.18          | +0.2<br>-0.1 | 0.5                     | ±0.1      |
|             | 3/16" x 1/8"           | 4.75          |              | 0.8                     |           |
|             | 1/4" x 5/32"           | 6.35          |              | 1.2                     | ±0.12     |
|             | 3/8" x 1/4"            | 9.53          | +0.3<br>-0.1 | 1.6                     | ±0.15     |
|             | 1/2" x 3/8"            | 12.7          |              |                         |           |
|             | 3/4" x 5/8"            | 19.0          |              |                         |           |
|             | 1" x 7/8"              | 25.4          |              |                         |           |

LVC

LVA

LVH

LVD

LVQ

LVP

LVW

LQ1

LQ3

LVN

LQHB

TL  
TILTLM  
TILMTD  
TIDTH  
TIH



# Compact Type High Purity Air Operated Chemical Liquid Valve Precautions 3

Be sure to read this before handling the products.

## Return of Product

### Warning

If the product to be returned is contaminated or is possibly contaminated with substances that are harmful to humans, for safety reasons, please contact SMC beforehand and then employ a specialist cleaning company to decontaminate the product. After the decontamination prescribed above has been carried out, submit a Product Return Request Sheet or the Detoxification/Decontamination Certificate to SMC and await SMC's approval and further instructions before attempting to return the item.

Please refer to the International Chemical Safety Cards (ICSC) for a list of harmful substances.

If you have any further questions, please don't hesitate to contact your SMC sales representative.

LVC

LVA

L VH

LVD

L VQ

LVP

L VV

LQ1

LQ3

LVN

LQHB

TL

TIL

TLM

TILM

TD

TID

TH

TIH