

# TPS3 L1

True 10 Mode Protection

## Type 1 / 2 Surge Protection Device (SPD) for P1, P2 Lighting and P3 Power Distribution Panelboards, Motor Control Centers and Busway Systems

### Features:




- Mounts internal to:
  - P1, P2 and P3 panels
  - TIASTAR motor control centers - standard 6" bucket
  - STP series busplug on SX series busway
- Consult factory for field retrofit in P1 panels
- UL 1449-4 Type 2 SPD, UL 1283 Listed, CSA 22.2 No. 269.2
- Optional UL 1449 4th Edition Recognized Type 1, CSA 22.2 No. 269.1
- Type 1 / Type 2 SPD
- Large block, individually fused, thermally protected, 50 kA MOVs
- 20 kA  $I_n$
- 200 kA SCCR (most models)
- Direct bus connected or can be wired to a circuit breaker (include W option)
- Designed, manufactured and tested consistent with:
  - ANSI/IEEE C62.41.1-2002, C62.41.2-2002, C62.45-2002, C62.62-2010, C62.72-2016 & CSA C22.2 No. 269.1 and .2
  - 1992/2000 NEMA LS-1
  - NEC Article 285
  - IEC 61643, CE
- All UL required OCP & safety coordination included
  - Type 1 SPDs intended for Line or Load side of Main Disconnect
  - Type 2 SPDs intended for Load side of Main Disconnect
- 10 year warranty
- SPD Specifications
  - Directly connected discrete protection elements between all possible modes providing true 10 mode protection
  - Surge Current Rating Per Phase
 

Per Phase	L-N	L-G	L-L	N-G
150 kA	50 kA	50 kA	50 kA	50 kA
300 kA	100 kA	100 kA	100 kA	100 kA
  - 100% monitoring (Every MOV is monitored, incl. N-G)
  - EMI/RFI filtering: Active tracking up to -50 db from 10 kHz to 100 MHz (Type 2 option only, includes UL 1283 Listing)
  - Repetitive impulse: 5,000 hits
  - Less than 1/2 nanosecond response time
  - Relative humidity range: 1-95% non-condensing
  - Operating frequency: 47-63 Hz
  - Operating temperature: -25°C (-15°F) to +60°C (140°F)



- Applications
  - Provides main service entrance or downstream protection for sensitive computer and electronic loads
  - Std. redundancy use: 150kA/phase
  - Max. redundancy use: 300kA/phase
- SPD Monitoring
  - LED indicators
  - Audible alarm with silence switch and test button
  - Dry contacts
  - Surge counter

Ordering Information

**TPS3**      **L1**      **X**   

Voltage Code   Surge Current (kA)   Options

A = 120/240V, 1Ø, 3W (Fig 1)  
 B = 120/240V, 3Ø, 4W (Fig 3)  
 C = 120/208V, 3Ø, 4W (Fig 2)  
 E = 277/480V, 3Ø, 4W (Fig 2)  
 K = 380/220V, 3Ø, 4W (Fig 2)  
 S = 400/230V, 3Ø, 4W (Fig 2)

15 = 150 kA per phase  
 30 = 300 kA per phase

0 = Standard config. (Default)  
 W = Terminal lug  
 X = Surge counter (Standard)


-2 = Type 2 SPD (Default)  
 Includes UL 1283 EMI/RFI Filters  
 0 = Type 1 SPD (Contact factory)  
 0 = Standard config. (Default)  
 B = Busway application  
 M = MCC application

Example: TPS3CL130X002 = 10 Mode Type 2 SPD (Default) for a 208/120V panelboard with a surge current capacity of 300 kA per phase and a surge counter

**Available Accessories:  
 Ordered Separately**  
 RMSIE - Remote monitor

UL 1449 Fourth Edition - Test Data  
 Voltage Protection Rating (VPR - 6 kV, 3 kA)

Voltage Code	Service Voltage	L-N	L-G	N-G	L-L	I <sub>n</sub>	SCCR	MCOV
A	120/240V, 1Ø, 3W (Fig 1)	700	700	700	1000	20 kA	100 kA	150
B	120/240V, 3Ø, 4W (Fig 3)	700 /1500	700 /1200	700	1000/1800	20 kA	200 kA	150/320
C	120/208V, 3Ø, 4W (Fig 2)	700	700	700	1000	20 kA	200 kA	150
E	277/480V, 3Ø, 4W (Fig 2)	1200	1200	1200	1800	20 kA	200 kA	320
K	380/220V, 3Ø, 4W (Fig 2)	1200	1200	1200	1800	20 kA	200 kA	320
S	400/230V, 3Ø, 4W (Fig 2)	1200	1200	1200	1800	20 kA	200 kA	320

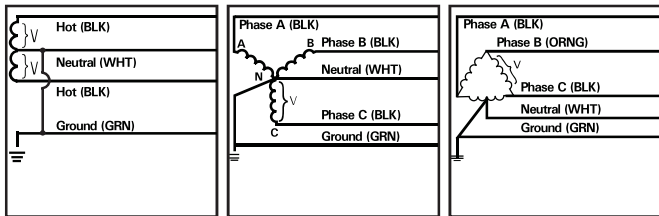

**Figure 1**  
 Split  
 2 Hots, 1 Neu, 1 Grnd

**Figure 2**  
 Wye  
 3 Hots, 1 Neu, 1 Grnd

**Figure 3**  
 Hi-Leg Delta (B High)  
 3 Hots, (B High),  
 1 Neu, 1 Grnd

**Siemens Industry, Inc.**  
 5400 Triangle Parkway  
 Norcross, GA 30092

888-333-3545  
 info.us@siemens.com

Order No. RPFL-S3L1C-0120  
 Printed in USA  
 All Rights Reserved.  
 ©2020 Siemens Industry, Inc.

The technical data presented in this document is based on an actual case or on as-designed parameters, and therefore should not be relied upon for any specific application and does not constitute a performance guarantee for any projects. Actual results are dependent on variable conditions. Accordingly, Siemens does not make representations, warranties, or assurances as to the accuracy, currency or completeness of the content contained herein. If requested, we will provide specific technical data or specifications with respect to any customer's particular applications. Our company is constantly involved in engineering and development. For that reason, we reserve the right to modify, at any time, the technology and product specifications contained herein.