


Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

T36BN13B7

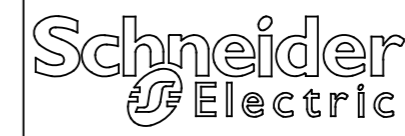

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 8773425173
Email: CCC@us.schneider-electric.com

Technical Information:

Max. Continuous Current Rating: 600V / 18A
 Certifications: UL Listed, CSA, CE
 RoHS: Yes
 Termination Method: Power Line: Screw Clamp, Power Load: Lug, Control Circuit: Screw Clamp
 Weight (lbs): 5.92
 Power Line Size (AWG): #8 - #18
 Power Load Size (AWG): #4 - #14
 Control Wire Size (AWG): #10 - #18
 Thermal Overload Type: Motor Logic Solid State
 Thermal Overload Trip Class: Class 10/20 Selectable
 Mounting: Panel

Specification:

Description: TeSys N Sz 0 open starter, 3 pole, 24 VAC
 Type: FVNR
 Voltages Code: B7 at 24VAC
 Control Type: Common control
 Coil Consumption: Inrush 70 VA
 Sealed 7 VA

Single Phase			Three Phase		
115V	230V	200V	230V	460V	575V
1 HP	2 HP	3 HP	3 HP	5 HP	5 HP